
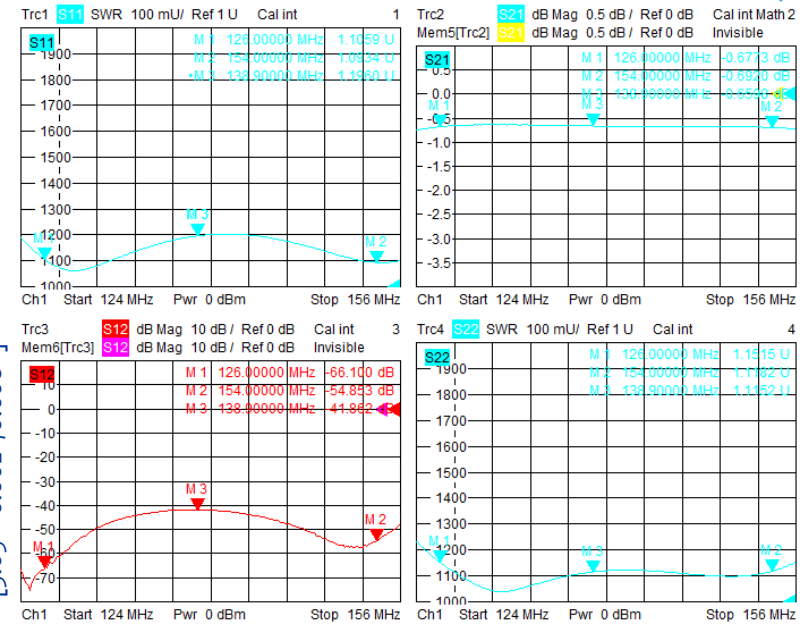


VHF DUAL JUNCTIONS CIRCULATOR--- RFLC-116-1

1.0 Mechanical Specifications		
1.1	Connector	N -F type
1.2	External Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

2.0 Environment specifications			
2.1	Operation Temp.	0°C~+70°C	
2.2	Storage Temp.	-40°C~+100°C	
2.3	Altitude	45000 ft	
2.4	Vibration	10g rms (15 degree 2KHz)	
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c	
2.6	Shock	20G for 11msc	

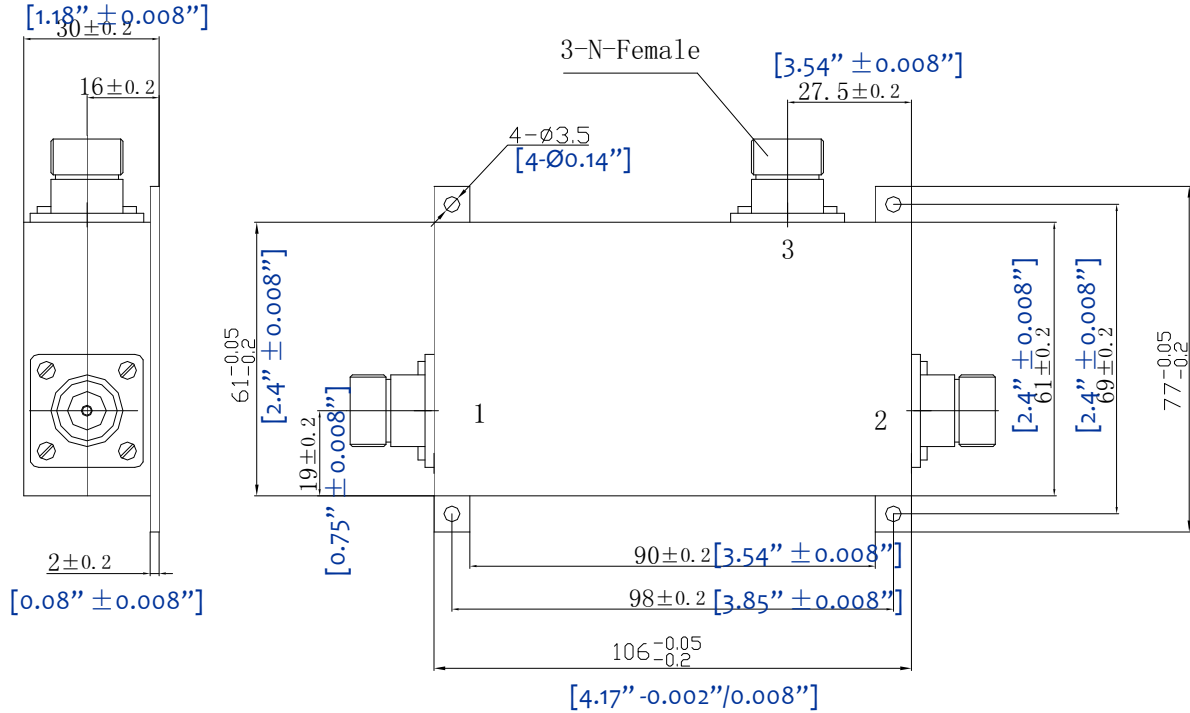

PN	Center Frequency (MHz)	Bandwidth	Insertion loss (dB) max	Isolation (dB) min	VSWR (max)	Power (W) CW
RFLC-116-1	100-200MHz	20% Fc (126-154MHz as shown)	1.0 (1->2->3)	40 (2->1)	1.3	30

PAGE	OF	DATE	Jan 8 th 2002
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.		DESIGN	RFPC
		RF-LAMBDA	RFPC
		CAD MODEL REVISION	02
		ASSEMBLY REVISION	VS23
		ASSEMBLY NAME	RFLVR14
		DRAWING NUMBER	D05-12
www.rflambda.com		SIZE	SHEETS
RF-LAMBDA		LT	1 OF 1