RFLC-504-9G DUAL JUNCTION CIRCULATOR ISOLATOR MODULE

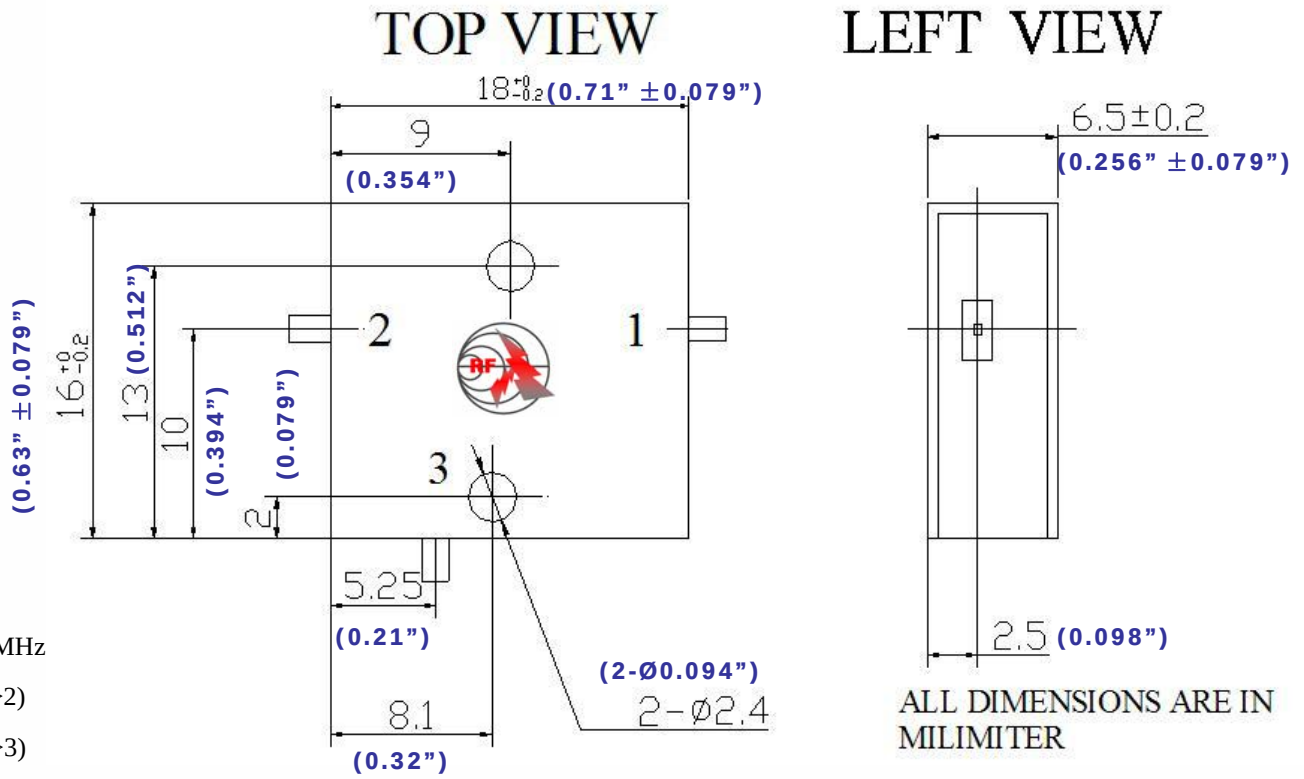

Electrical Specifications:

Center Frequency Range:	8500MHz-9500MHz
Insertion Loss:	0.7dB max (1->2)
	0.35dB max (2->3)
Isolation:	35dB min (2->1)
	20dB min (3->2)
VSWR:	1.25 : 1
Temp. Range:	-40ºC~+85ºC
Power Handling:	20W (CW)
Internal Load Power:	1W (CW)
Interface:	Microstrip Flat PIN

PAGE 1 OF 1

DATE Dec 19th 2005

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRUTUBG BT RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY

DESIGN RFPC

RF-LAMBDA RFPC

Drop-in Circulator Isolator combination

CAD MODEL REVISION 01

ASSEMBLY REVISION VS12

ASSEMBLY NAME RFLVR45

DRAWING NUMBER D05-4

www.rflambda.com

RF-LAMBDA

SIZE LT

SHEETS 1 OF 1