




### Voltage Control Phase Shifter 0.5 - 1GHz

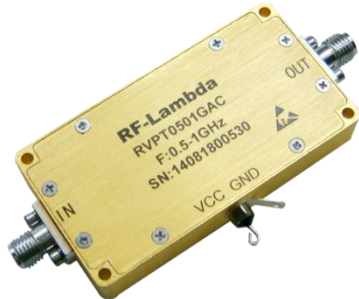

#### Features

- Wide Band Operation 0.5-1GHz
- 180° Phase Shift
- Low Insertion Loss and Low Phase Error
- Single Control Operation
- Customization available upon request

#### Typical Applications

- Military and Aerospace
- Test & Measurement
- Research and Development

Electrical Specifications, TA = +25 °C

Description	PN:RVPT0501GAC			
	Voltage Control Phase Shifter			
Parameters	Min	Typ.	Max	Units
Frequency Range	0.5		1.0	GHz
Phase Range		180		deg
Phase Error		±20		deg
Insertion Loss		2.2	3.0	dB
Insertion Loss Temperature Coefficient		0.003		dB/°C
Input VSWR		1.6	2.0	:1
Output VSWR		1.6	2.0	:1
0.1dB Compression Point (Po.1dB)			23	dBm
Control Voltage	DC-15			V
current	20			mA
Impedance	50			Ω
Weight	1.41			ounces
Input / Output Connectors	SMA-Female			
Finish	Gold plating			
Material	Aluminum			
Sealing	Hermetically Sealed (Optional)			

Voltage Control Phase Shifter 0.5 - 1GHz



**Absolute Maximum Ratings**

Control Voltage	0~ 18V
RF Input Power	30dBm

**Ordering Information**

Part No.	ECCN	Description
RVPT0501GAC	EAR99	0.5-1 GHz Voltage Control Phase Shifter

**Environmental Specifications and Test Standards**


Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-45°C~+85°C
Storage Temperature		-55°C~+125°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude		Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883	MIL-STD-883 (For Hermetically Sealed Units)

**Voltage Control Phase Shifter 0.5 - 1GHz**




### Typical Performance Plots


#### Insertion Loss @ +25°C

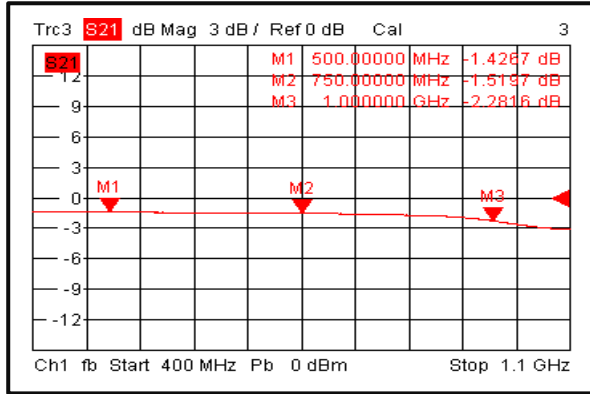


#### Input VSWR @ +25°C

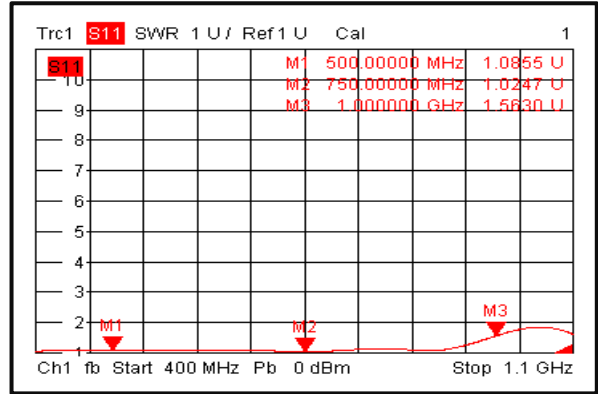


#### Output VSWR @ +25°C

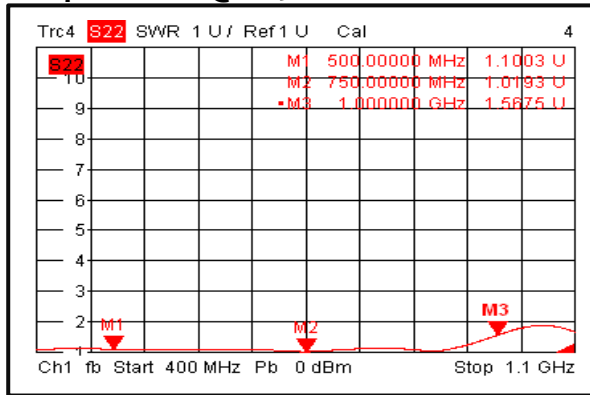


#### Insertion Loss @ -45°C

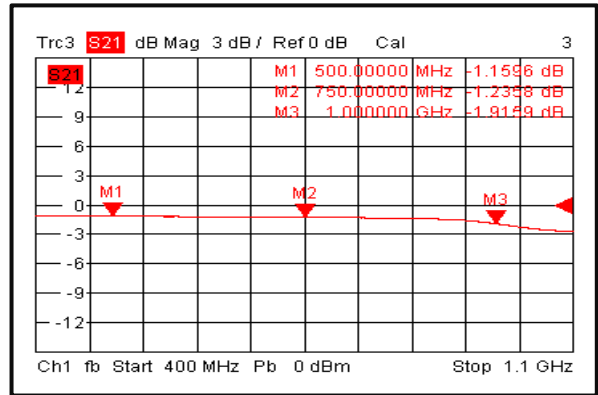


#### Input VSWR @ -45°C

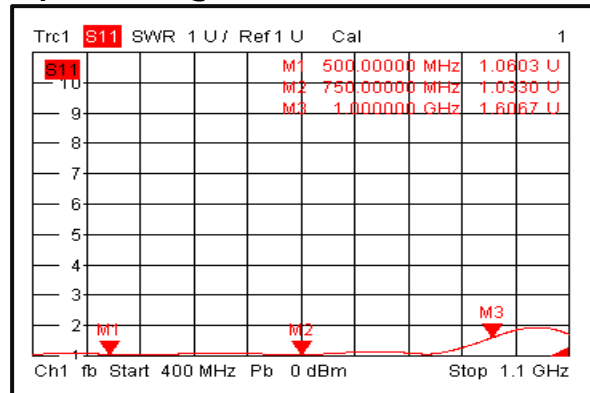


#### Output VSWR @ -45°C

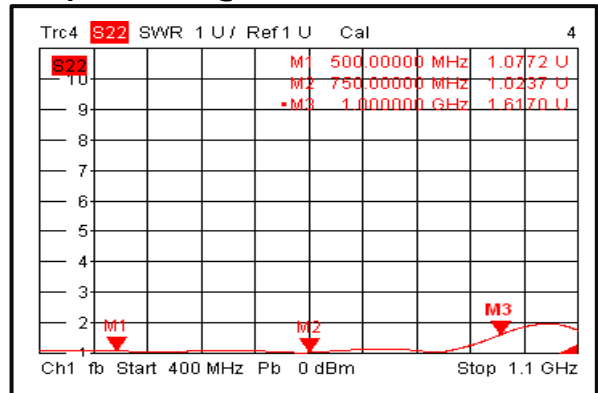

#### Insertion Loss @ +85°C

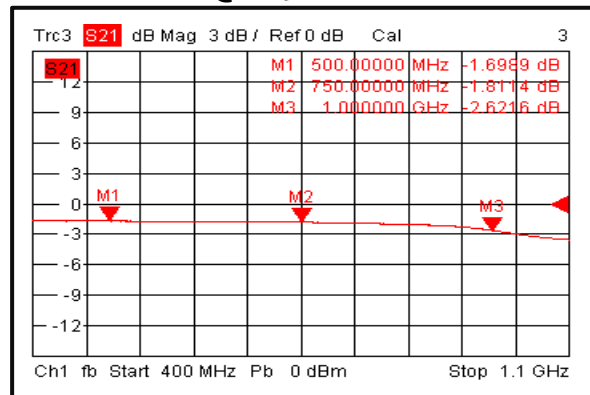


#### Input VSWR @ +85°C

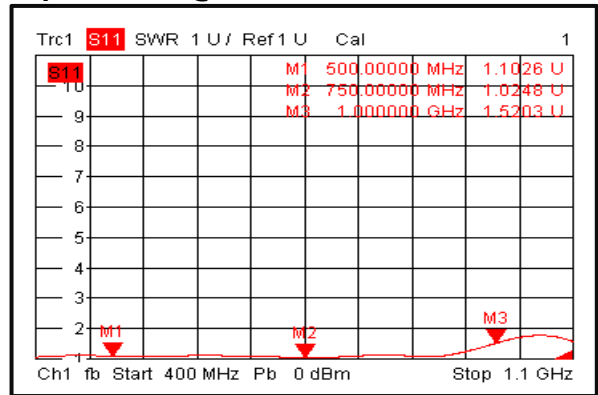





### Output VSWR @ +85°C

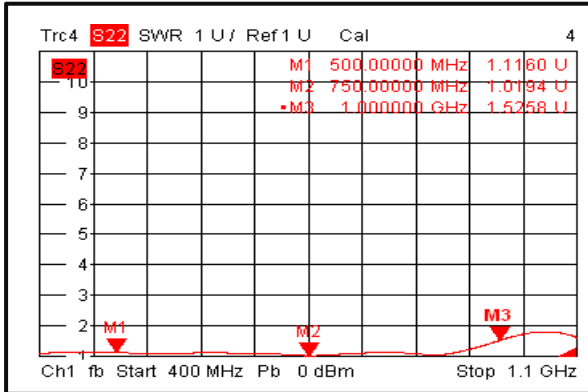


### Insertion Loss vs. Frequency

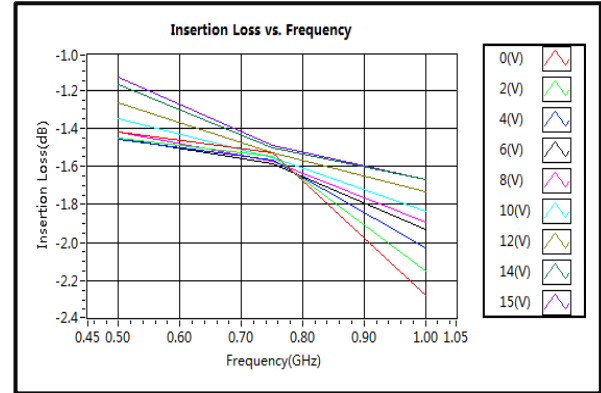


### Input VSWR vs. Voltage

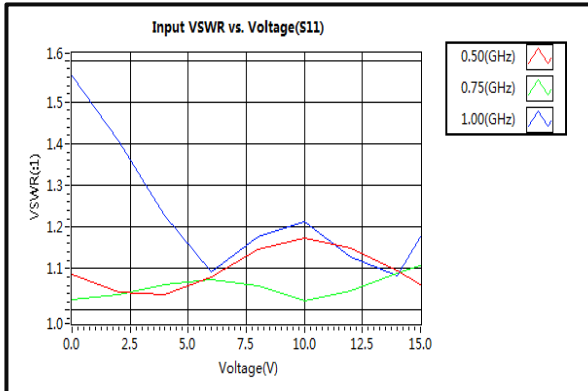


### Output VSWR vs. Voltage

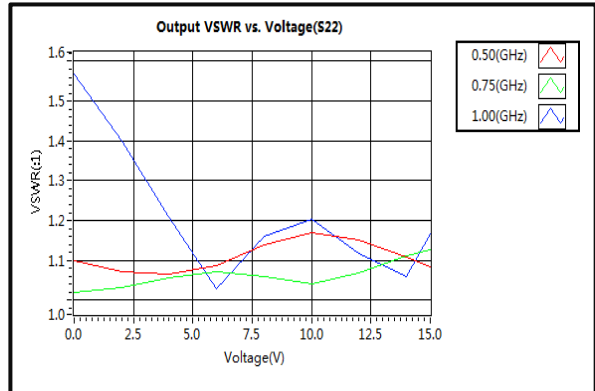


### Phase Shift vs. Frequency

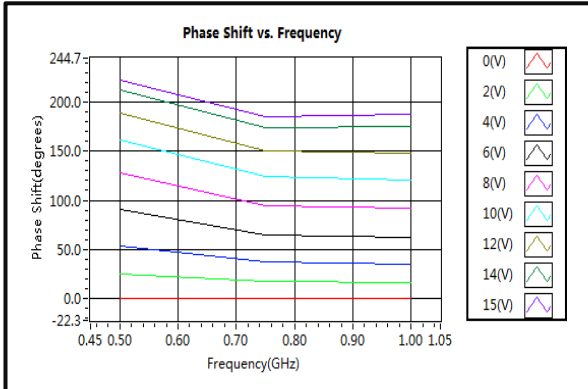

### Phase Shift vs. Voltage

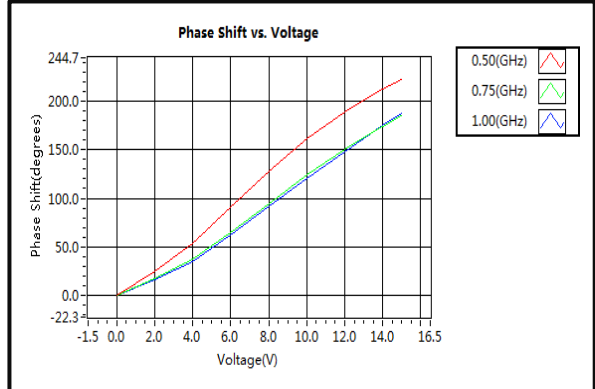

### Normalized Attenuation vs. Frequency

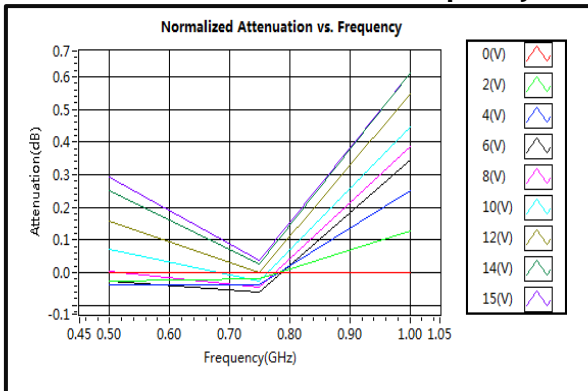

Voltage Control Phase Shifter 0.5 - 1GHz




# RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

## RVPT0501GAC

### Outline Drawing:

All Dimensions in mm [inches]

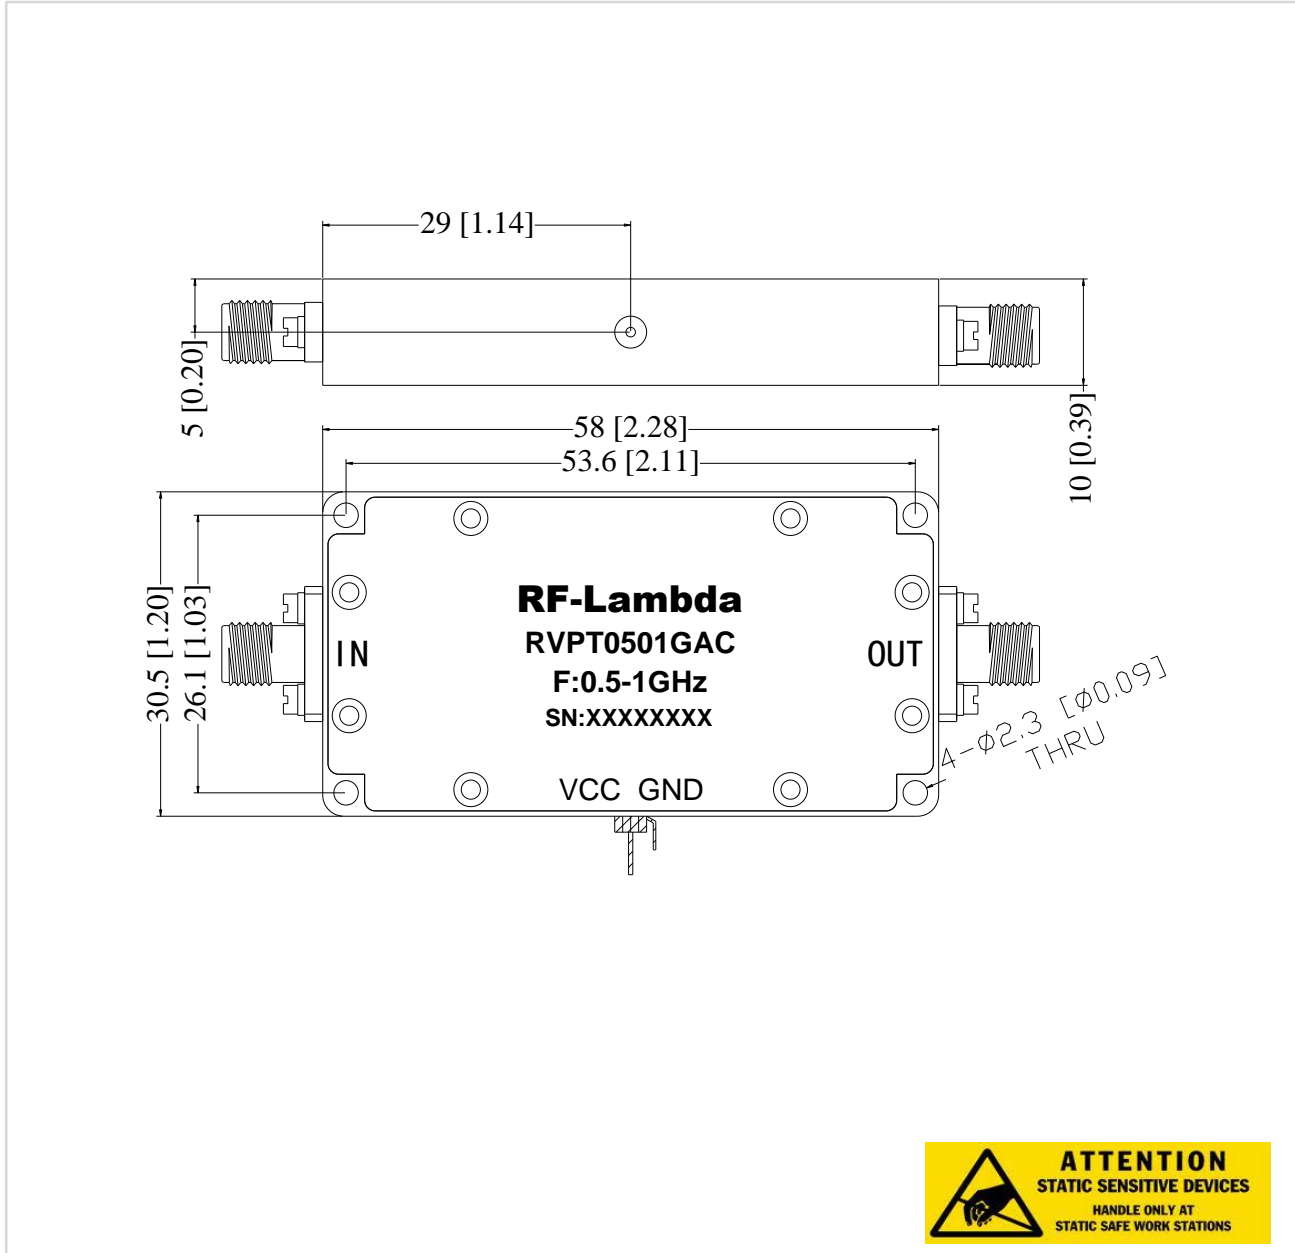

Voltage Control Phase Shifter 0.5 - 1GHz

### Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.