
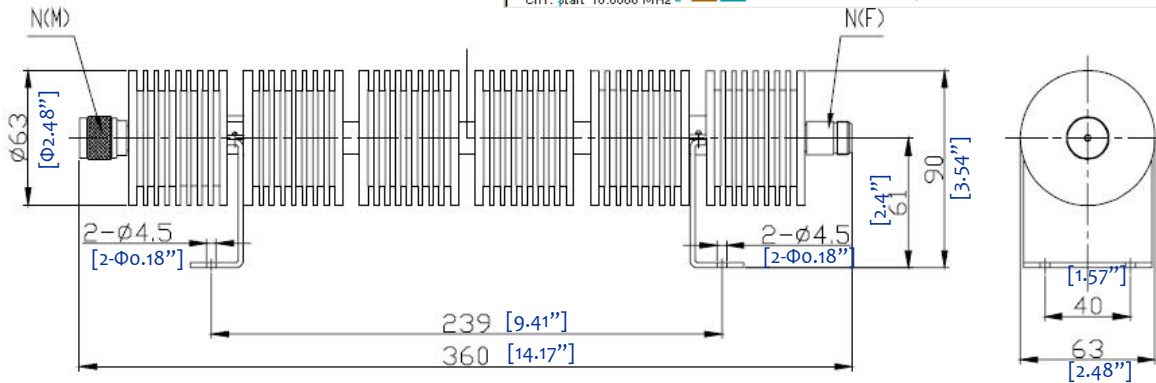
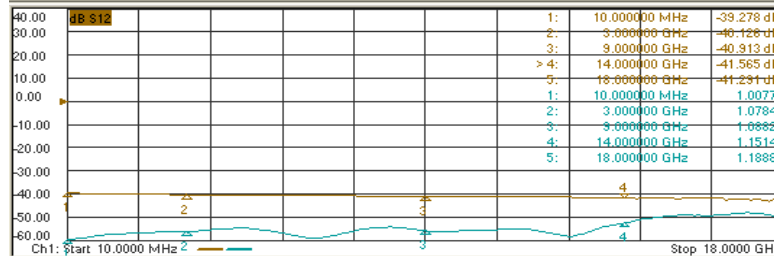



# 200W HIGH POWER COAXIAL FIXED ATTENUATOR DC-18Hz --- RFS200G18B

1.0 Mechanical Specifications		
1.1	Coaxial Connector	N
1.2	Size	360 × 63 × 90mm 14.17" × 2.48" × 3.54"
1.3	Weight	1.05kg
1.4	External Body Finish	Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C ~ +85°C
2.2	Storage Temp.	-55°C ~ +125°C
2.3	Altitude	42000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

3.0 Electrical Specifications						
PN	Frequency (GHz)	Attenuation Accuracy (dB)				VSWR (max.)
		10	20	30	40	
RFS200G18B	DC-18	-2.5/+4.5	+/-2.5	-2.0/+3.5	-2.0/+3.5	1.50

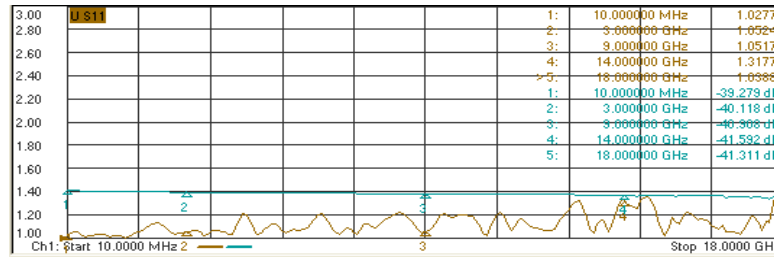

PAGE 1 OF 1		DATE JUN 12 <sup>th</sup> 2009
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.</small>		DESIGN
 <b>RFS200G18B HIGH POWER ATTENUATOR</b>		RFPC
www.rflambda.com		RF-LAMBDA
CAD MODEL REVISION 10 ASSEMBLY REVISION VSS2 ASSEMBLY NAME RFLVR07 DRAWING NUMBER D05-A		RFPC
RF-LAMBDA	SIZE LT	SHEETS 1 OF 1