
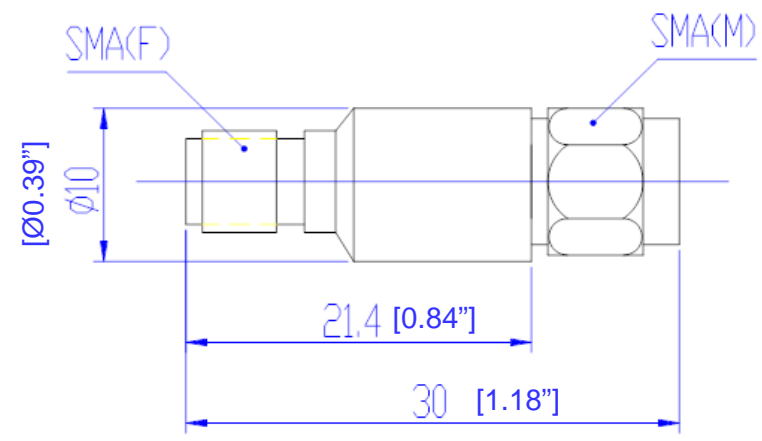


# DC-26.5GHz 2W ATTENUATOR

## - RFS2G26

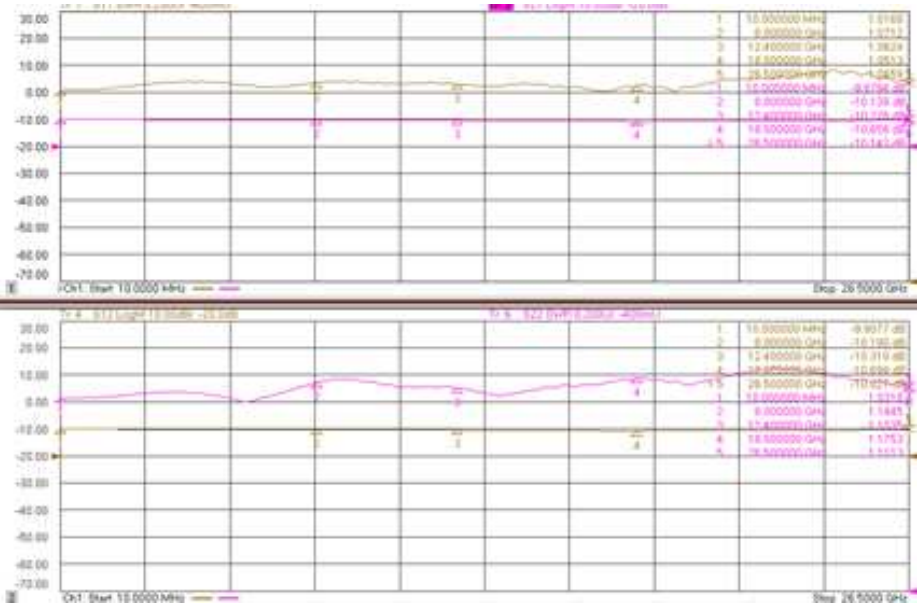

1.0 Mechanical Specifications		
1.1	Coaxial Connector	SMA (Male or Female)
1.2	External Body Finish	Body painted with gray/black epoxy enamel
1.3	Weight	10g

3.0 Electrical Specifications		
3.1	Frequency Range	DC-26.5GHz
3.2	Average Power	2W 25°C 0.2W 125°C
3.3	VSWR	1.35 :1
3.4	Peak Power	0.5 KW
3.5	Attenuation	1-9dB (±1.0) 10dB (±1.0)


2.0 Environment specifications		
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-55°C~+125°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc



PAGE 1 OF 1

DATE MAY 6<sup>th</sup> 2000

PROPRIETARY INFORMATION  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY

 **RFS2G26**  
**Termination**

www.rflambda.com

DESIGN	RFPC
RF-LAMBDA	RFPC
CAD MODEL REVISION	10
ASSEMBLY REVISION	V552
ASSEMBLY NAME	RFLVR07
DRAWING NUMBER	D05-A

**RF-LAMBDA** SIZE LT SHEETS 1 OF 1