



400W HIGH POWER COAXIAL FIXED ATTENUATOR DC-10GHz

--- RFS400G10B

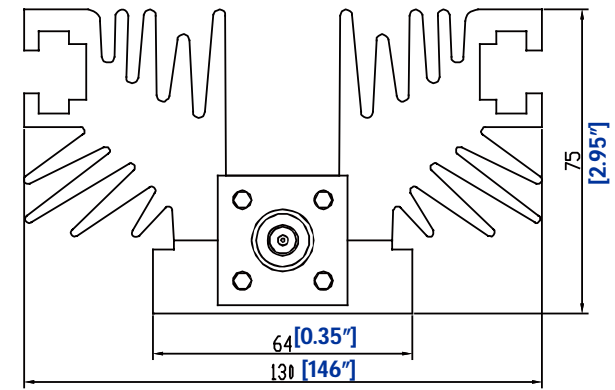

1.0 Mechanical Specifications		
1.1	Coaxial Connector	N
1.2	Size	356 × 130 × 75mm 14.02" × 5.12" × 2.95"
1.3	Weight	4.3Kg
1.4	External Body Finish	Body painted with gray/black epoxy enamel

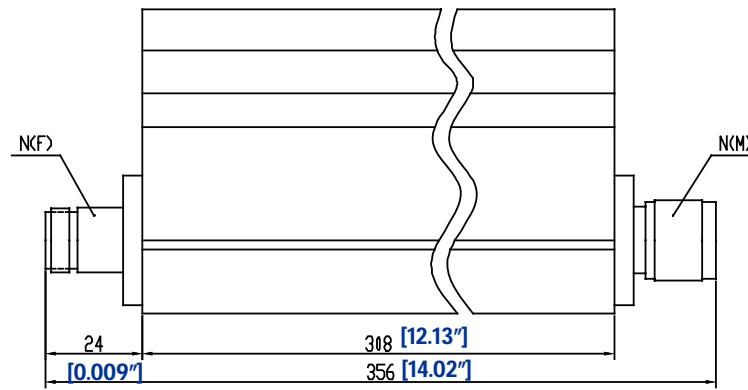

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	42000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

3.0 Electrical Specifications								
PN	Frequency GHz)	Attenuation Accuracy (dB)				VSWR (max.)	Peak Power (W)	
		20	30	40	50			
RFS400G10	DC-10	/	/	±1.0	±1.0	1.45	5K	

PAGE 1 OF 1	DATE JUN 12 th 2009
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY	
RFS400G10B HIGH POWER ATTENUATOR	DESIGN RFPC RF-LAMBDA RFPC CAD MODEL REVISION 10 ASSEMBLY REVISION VS52 ASSEMBLY NAME RFLVR07 DRAWING NUMBER D05-A
www.rflambda.com	RF-LAMBDA
SIZE LT	SHEETS 1 OF 1