




GSM WCDMA Frequency Combiner


- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 200W max
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



GSM WCDMA FREQUENCY COMBINER RFDUPC8202

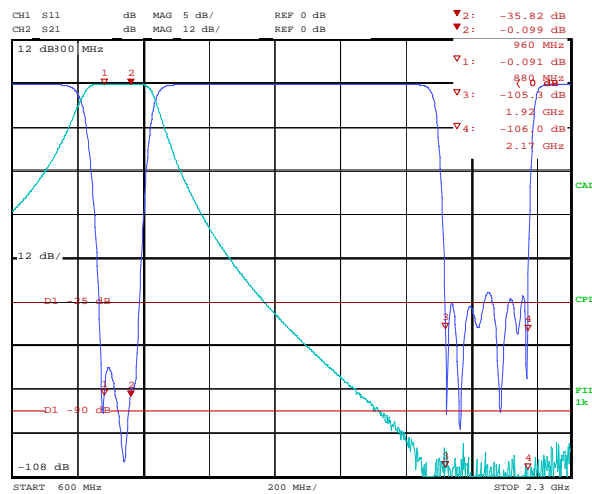

GSM

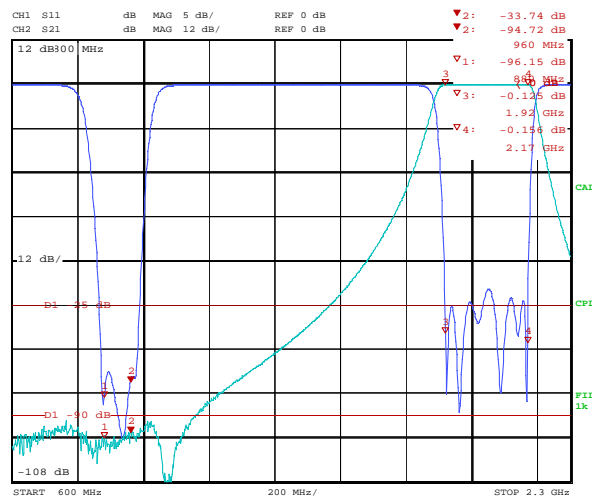

WCDMA

Electrical Specification

- Frequency Range:** GSM:880~960MHz
WCDMA:1920~2170MHz
- Insertion Loss:** 0.3dB max
- Pass band Ripple:** 0.2dB maximum
- Return Loss:** ≤-20dB
- Out band Rejection:** >90dB @ WCDMA
>90dB @ GSM

