




### CDMA GSM WLAN Frequency Combiner

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 200W max
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative




CDMA GSM WLAN FREQUENCY COMBINER RFDUPC8203

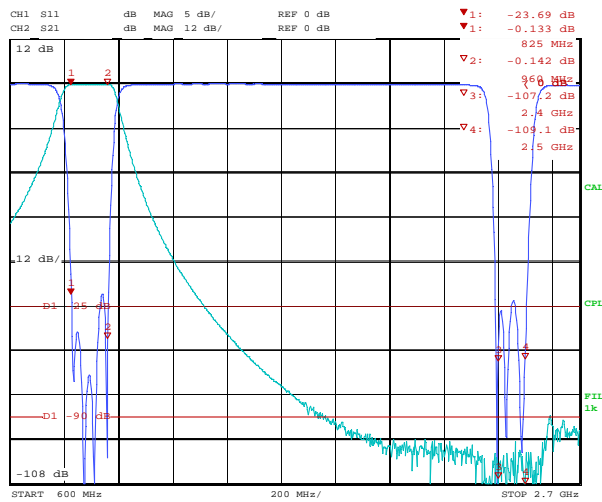

Date: 2.MAR.07 03:15:35

WCDMA-GSM

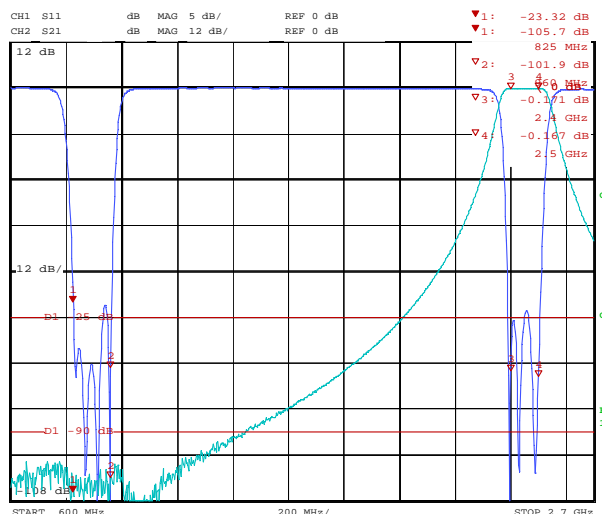

Date: 2.MAR.07 03:09:54

WLAN

### Electrical Specification

- Frequency Range:** CDMA-GSM:825~960MHz  
WLAN:2400~2500MHz
- Insertion Loss:** 0.4dB max
- Pass band Ripple:** 0.3dB maximum
- Return Loss:** ≤20dB
- Out band Rejection:** >80dB @ WLAN  
>80dB @ CDMA-GSM

