




### WCDMA PHS Frequency Combiner


- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 200W max
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



WCDMA PHS FREQUENCY COMBINER RFDUPC8206

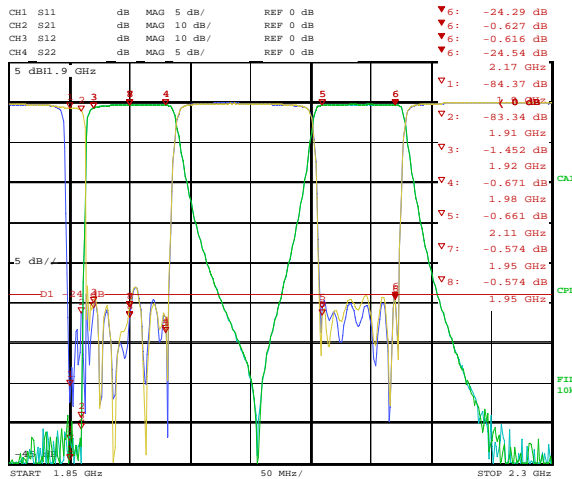

PHS

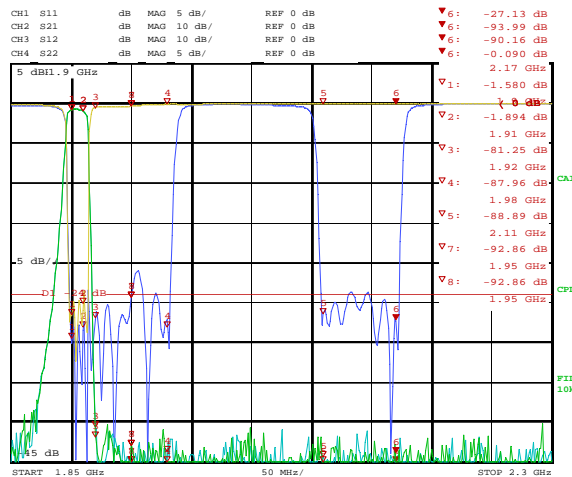

WCDMA

#### Electrical Specification

- Frequency Range:** PHS:1900~1910MHz  
WCDMA:1920~2170MHz
- Insertion Loss:** 2.0dB @PHS maximum  
1.5dB@WCDMA
- Pass band Ripple:** 0.5dB @PHS maximum  
0.8dB@WCDMA
- Return Loss:** ≤20dB
- Out band Rejection:** >70dB @ PHS  
>70dB @ WCDMA

