




CDMA GSM Frequency Combiner


- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 200W max
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



CDMA GSM FREQUENCY COMBINER RFDUPC8207

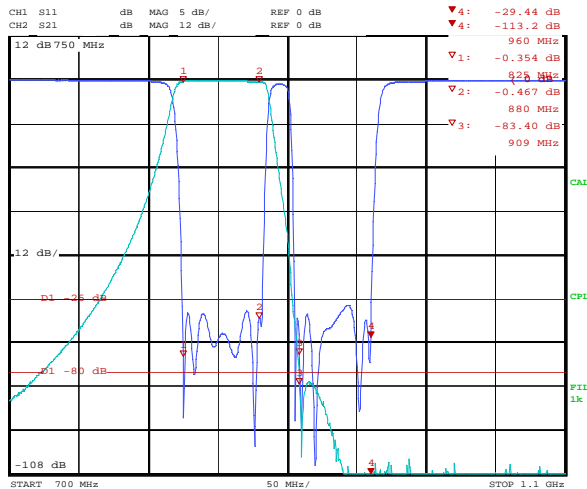

CDMA

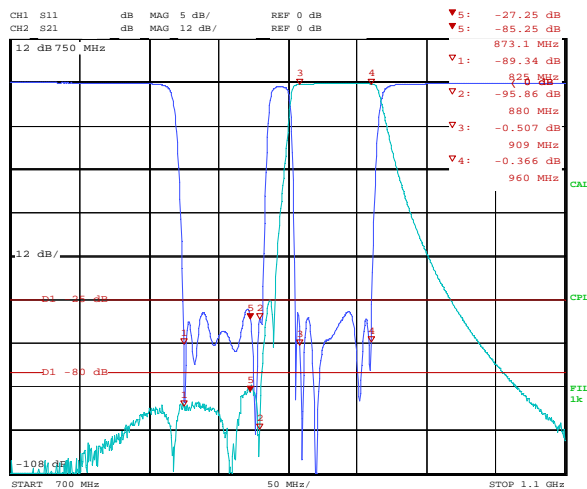

GSM

Electrical Specification

- Frequency Range:** CDMA:825~880MHz
GSM:909~960MHz
- Insertion Loss:** 0.6dB max
- Pass band Ripple:** 0.4dB maximum
- Return Loss:** ≤20dB
- Out band Rejection:** >80dB @ CDMA
>80dB @ GSM

