# WCDMA GSM WLAN Frequency Combiner

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 200W max
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative

| Electrical Specification | |
|---|---|
| Frequency Range | GSM:885～960MHz ; WCDMA:1920～2170MHz ; WLAN:2400～2483.5MHz |
| Insertion Loss: | 0.4dB@ GSM max;0.6dB@WCDMA max; 0.6dB@WLAN max |
| Pass band Ripple | 0.4dB maximum |
| Return Loss | ≤ -20dB |
| Out band Rejection | >85dB @ GSM ; >85dB @ WCDMA ; >85dB @ WLAN |

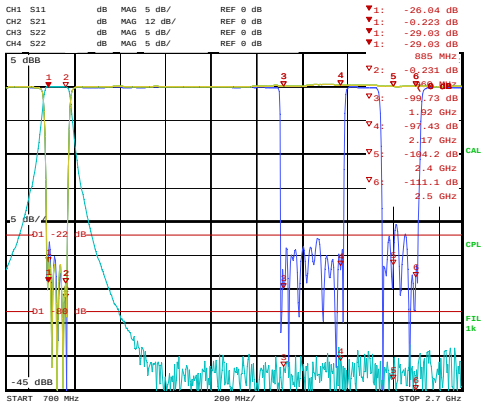


GSM

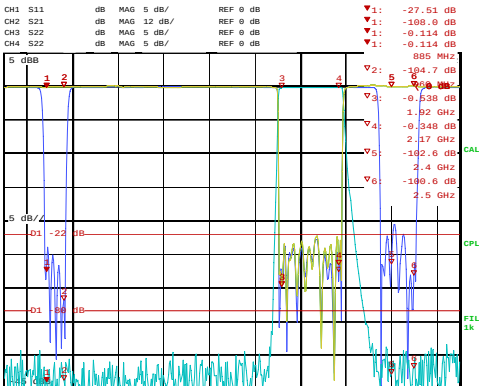


WCDMA

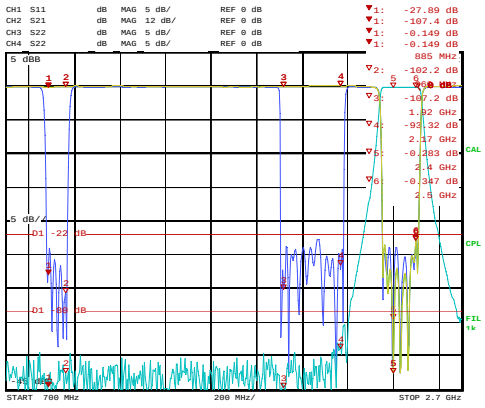

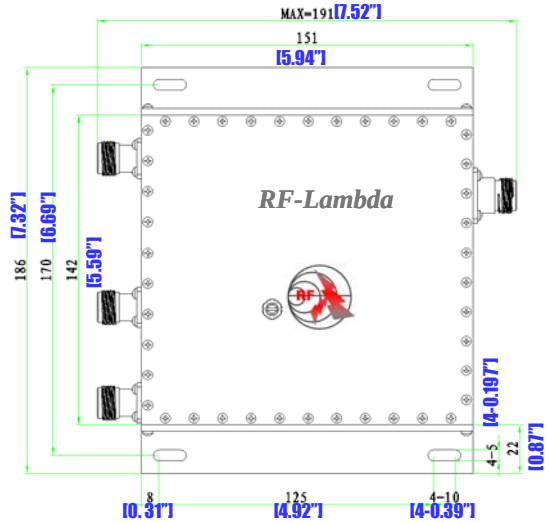
WLAN