



### 2G Commercial Band Duplexer Frequency Combiner

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 50W average WLAN PHS signal
- N-Female and SMA-F connector available upon request
- Storage temperature -50°C~+125 °C
- Operational Temperature: -40 °C ~+85 °C
- Operating Humidity: 0~90% relative



### Specification



Channel Frequency: 1920~1985MHz  
2400~2483MHz

Insertion Loss: 0.6dB typ. 1.0dB max

Pass band Ripple: 0.5dB p-p maximum

Return Loss: 18dB minimum

Outband Rejection:  
>75dB @ Channel Isolation

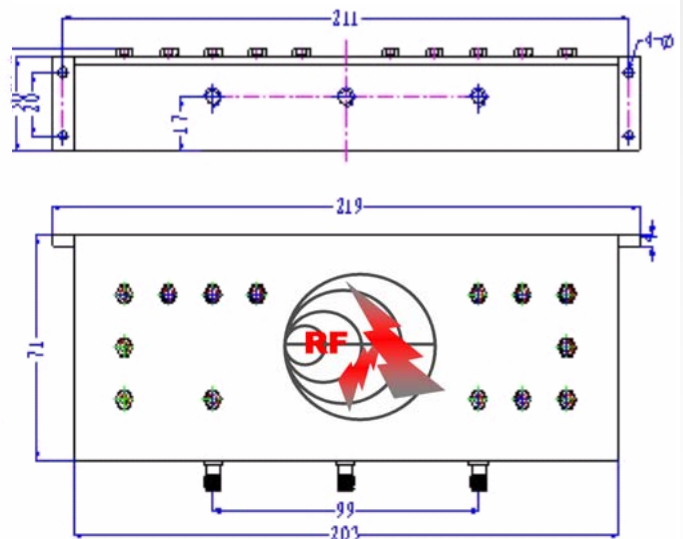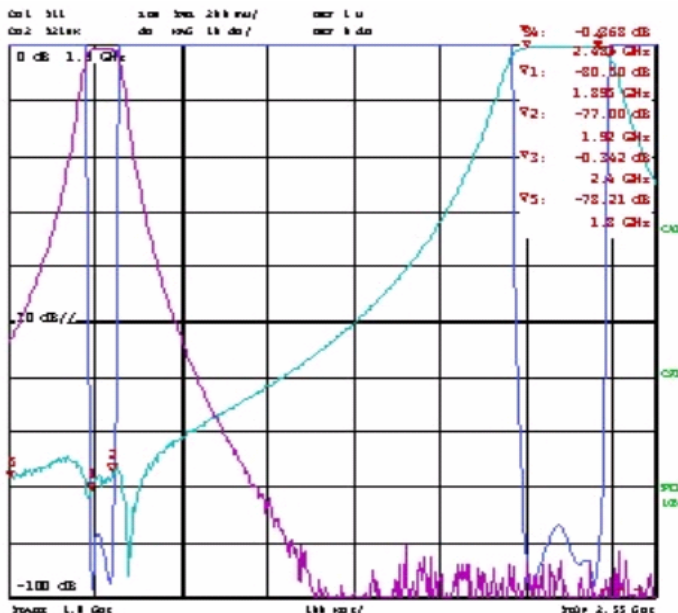

2G COMMERCIAL BAND DUPLEXER BAND COMBINER