

Ultra Low Phase Noise USB Controlled RF Synthesizer 0.1GHz-40GHz



Product Description

RSYN01G44GA is an ultra low phase noise USB controlled RF synthesizer with a frequency range of 0.1 to 40GHz.

The power output of this RF synthesizer is +10dBm. The frequency stability is ± 0.5 ppm using the on board reference.

The RSYN01G44GA is an easy-to-use high frequency synthesizer controlled through a standard USB port. Using advanced VCO and DDS based technology along with a temperature compensated crystal reference, it offers ultra-low phase noise (-129dBc/Hz at 1MHz offset 1GHz output) and high frequency resolution.

The unit can also be locked to an external 10MHz reference source.

Features

- Output Frequency Range: 0.1 ~ 40GHz
- Output Power Range: -20dBm to +23dBm
- Frequency Stability: +/-0.5ppm with internal reference
- Frequency Step Tuning Speed: <100us
- Tuning Step: 0.001Hz
- Phase Noise @10KHz offset -110dBc/Hz (@10GHz Output Frequency)
- Control Interface: USB

Typical Applications


- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)


Parameter	Min	Typ	Max	Units
Frequency Range	0.1		40	GHz
Output Power		10		dBm
Output Power Tuning range		31.5dB with 0.5dB step		
Frequency stability		± 0.5		ppm
Frequency Aging(10 years)		± 3		ppm
Tuning Speed (Not including programming time)			110	us
Reference tuning range		± 100		ppm
Tuning Step		0.001		Hz
SFDR 1MHz Tuning Step		60		dBc
Phase Noise @ 10GHz Typical		-116dBc/Hz(@10KH)		
		-117dBc/Hz (@100KHz)		
		-118dBc/Hz (@1MHz)		
		-140dBc/Hz (@10MHz)		
Power Supply Voltage		+15		V
Power Supply current		900-1500		mA
Control Interface		USB 2.0		
EXT Reference Input Level (10MHz)	-5		+5	dBm
Weight		5300		g
Output Connector		2.92mm-Female		
External Reference Input Connector		2.92mm-Female		

Typical Performance Plots


Tuning Speed < 110uS

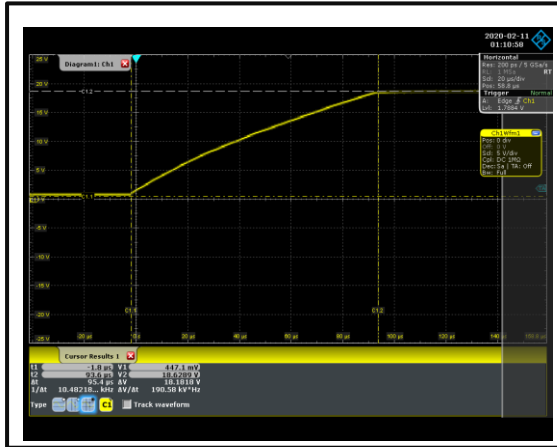


Tuning Speed < 110uS

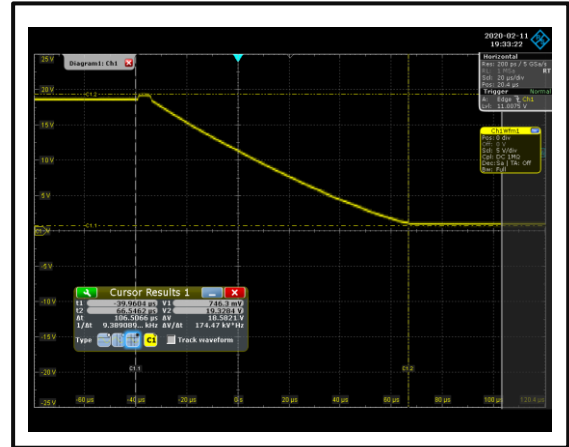


10GHz

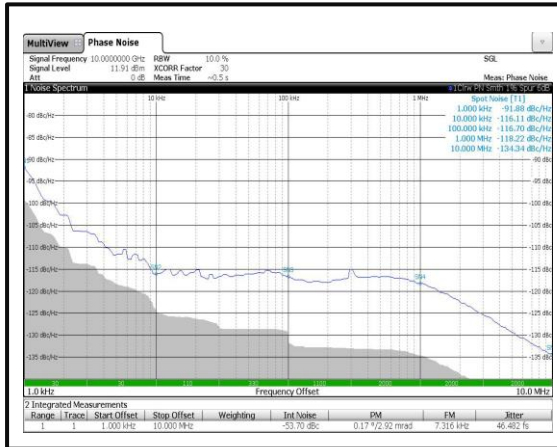


20GHz

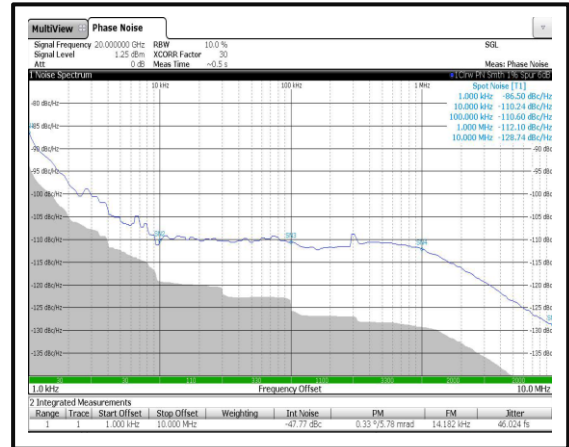

Phase Noise

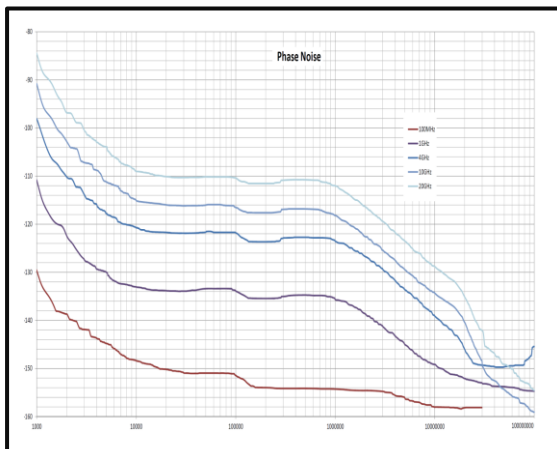


Phase Noise of all Frequencies

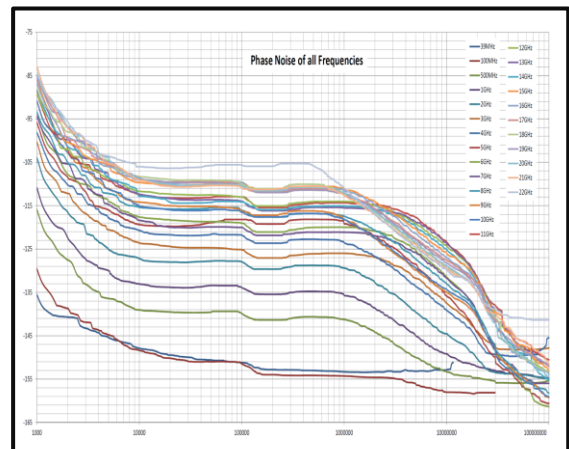


Typical Performance Plots

Phase Noise Comparison

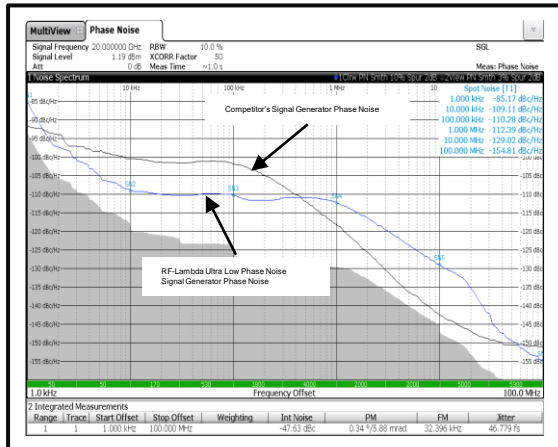


Video Instruction Link:

http://www.rflambda.com/product_signalgenerator.jsp

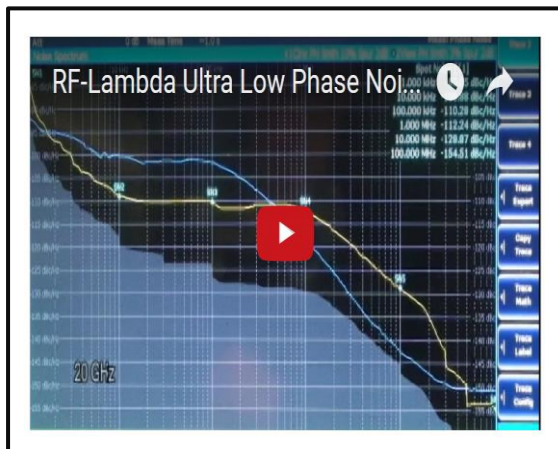

Typical Performance Plots

Typical Output Power Chart

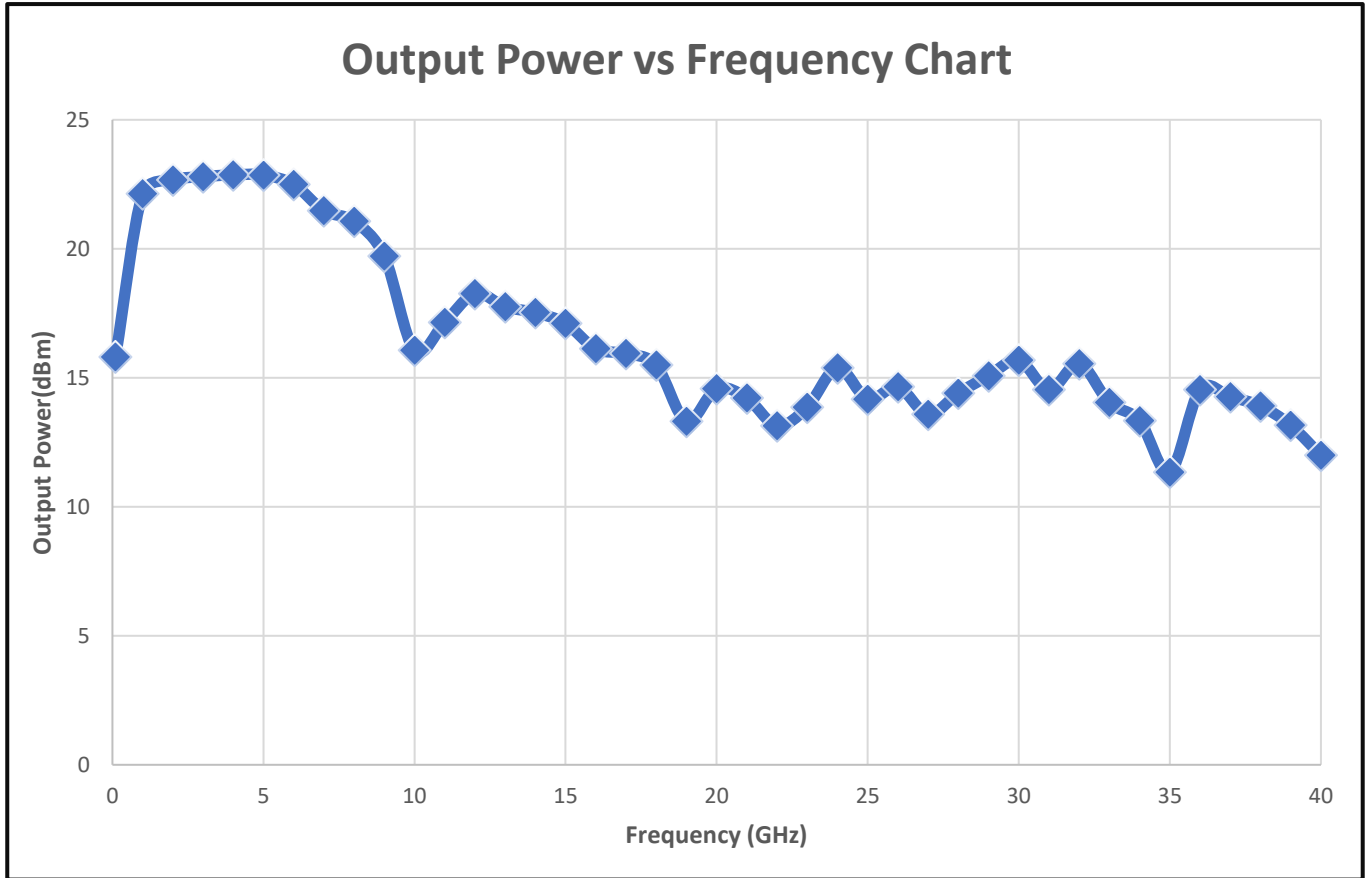

Absolute Maximum Ratings


Parameter	Minimum	Nominal	Maximum	Units
Storage Temperature	-40	-	85	°C
Operating Temperature	0	-	70	°C





User Instructions

1. Download the GUI and driver from RF-LAMBDA website.

RF Signal Generator

Frequency Range(GHz): All







Part Number	Description	Frequency Range (GHz)	Resolution(Hz)	Speed(us)	Max Power(dBm)	10KHz Phase Noise	Spurious(dBc) (V)	Packaging	Inventory	Control Software	PDF	Quote
RSGLP0120GA	USB Control Signal Generator	0.0400~22.0000	0.0010	100	5	-116dBc/Hz @ 10GHz	-60	Coaxial				<input type="button" value="ADD TO RFQ"/>
RSGLP0144GA	USB Control Signal Generator	0.0100~44.0000	0.0010	100	10	-113dBc/Hz @ 10GHz	-60.00	Coaxial				<input type="button" value="ADD TO RFQ"/>

2.Driver Installation:


RF Signal Source ▶ RFSG-Driver ▶

Library ▶ Share with ▶ New folder


Name	Date modified
 x64	3/23/2021 3:33 AM
 siusbxp.cat	5/6/2016 12:42 AM
 siusbxp.inf	5/6/2016 12:42 AM
 USBXpressInstaller_x64.exe	5/6/2016 12:42 AM

User Instructions

3. Install “RF Signal Source A2 Setup.exe”.

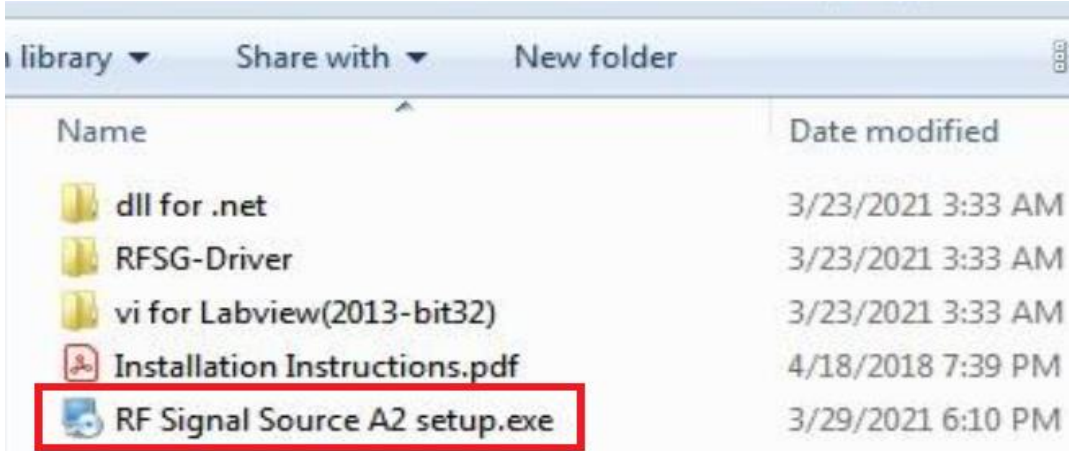


4. Connect the USB cable to the device and double click “Signal Source.exe” then turn on the +15V power supply. Right click the refresh button, and then the part number, serial number, and revision number will show up in the top right corner.

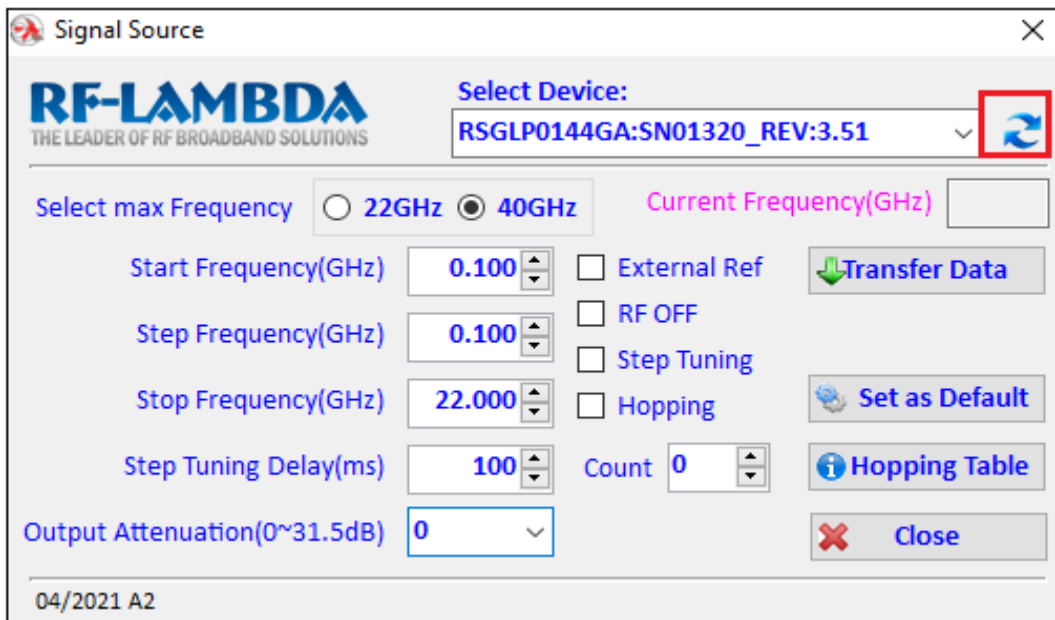

Single Frequency Mode

1. Select Max frequency and Start frequency in GHz then click Transfer Data.

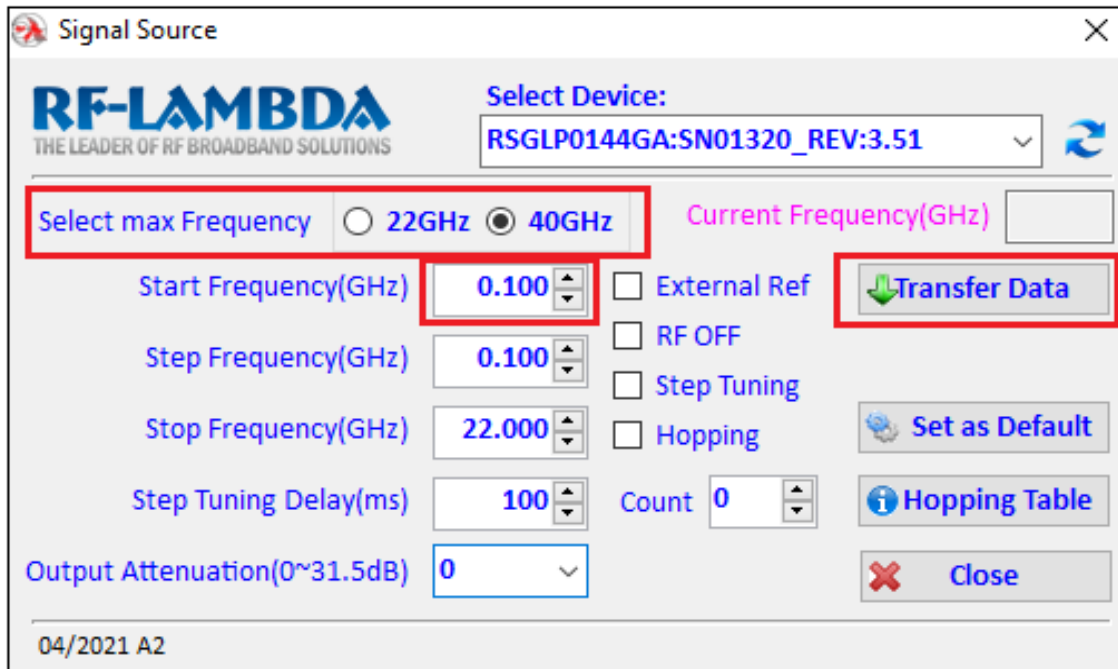

2. External Ref = 10MHz.


3. RF OFF = No output power.

4. Step Tuning = Step Tuning mode

5. Hopping = Hopping mode

Step Tuning Mode

1. Input “Start Frequency”, “Step Frequency”. “Stop Frequency”, and “Step Tuning Delay(ms)”. Check “Step Tuning” mode then click “Transfer Data”. The device will automatically follow the instruction setup to output frequencies and start to looping until the user click stop.

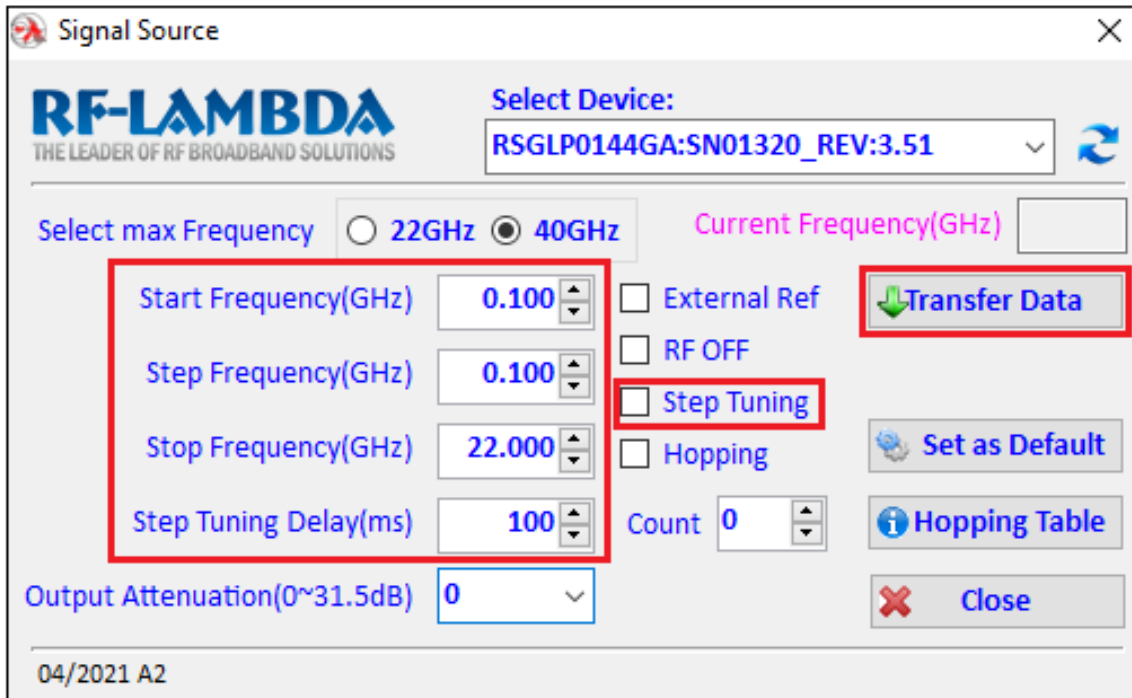

A.Start Frequency: The starting frequency in GHz

B.Step Frequency: The difference between each frequency in GHz.


C.Stop Frequency: The last frequency in GHz.

D.Step Tuning Delay(ms): Delay in between each frequency in microseconds.


Hopping Mode

Hopping Mode needs create a file in the installation directory, so please run “Signal Source.exe” as an administrator.

1. Check “Hopping” mode then click Hopping Table.

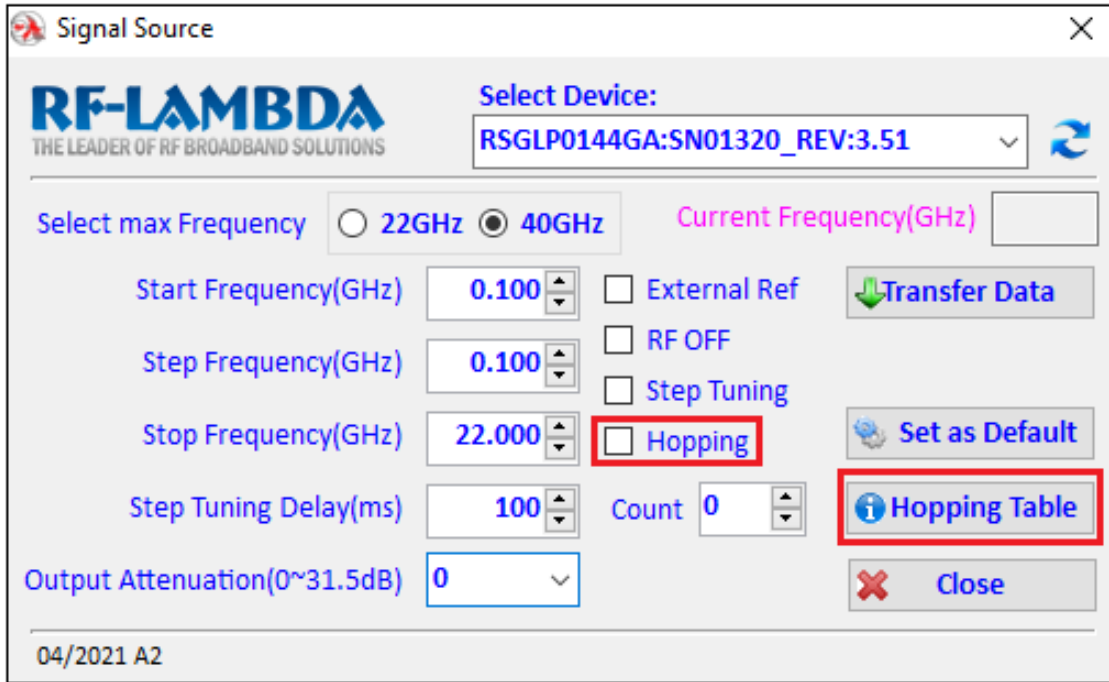


2. The frequency setup is the same as the “Step Tuning Mode”, after that click “Create Table”. The table give the customer options to manually edit the frequency, attenuation, and delay. After all the modifications click “Save Table Data”. Then click “close”.

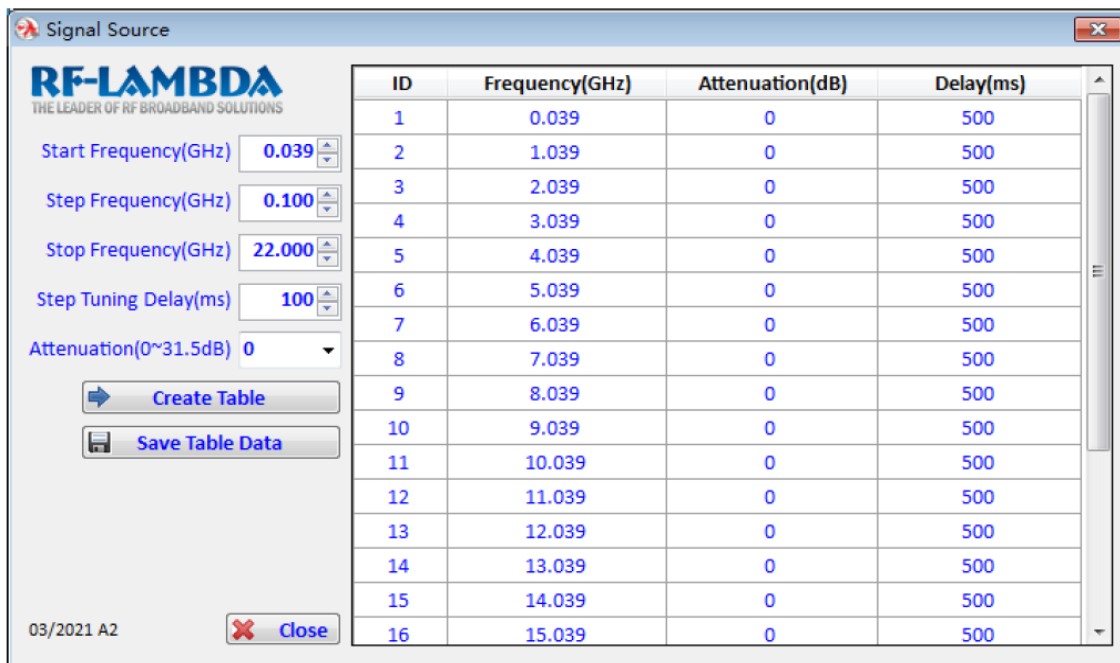


Hopping Mode

3. Check “Hopping” mode and Click “Transfer Data” to start the hopping function.

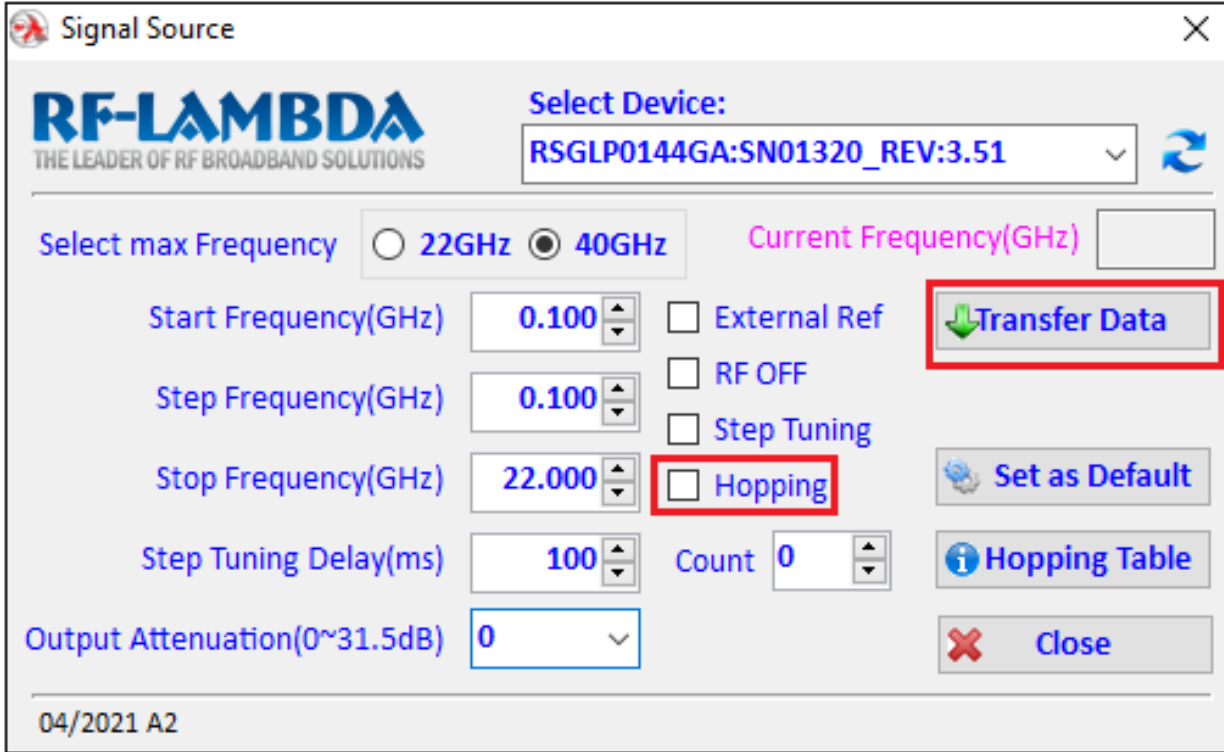





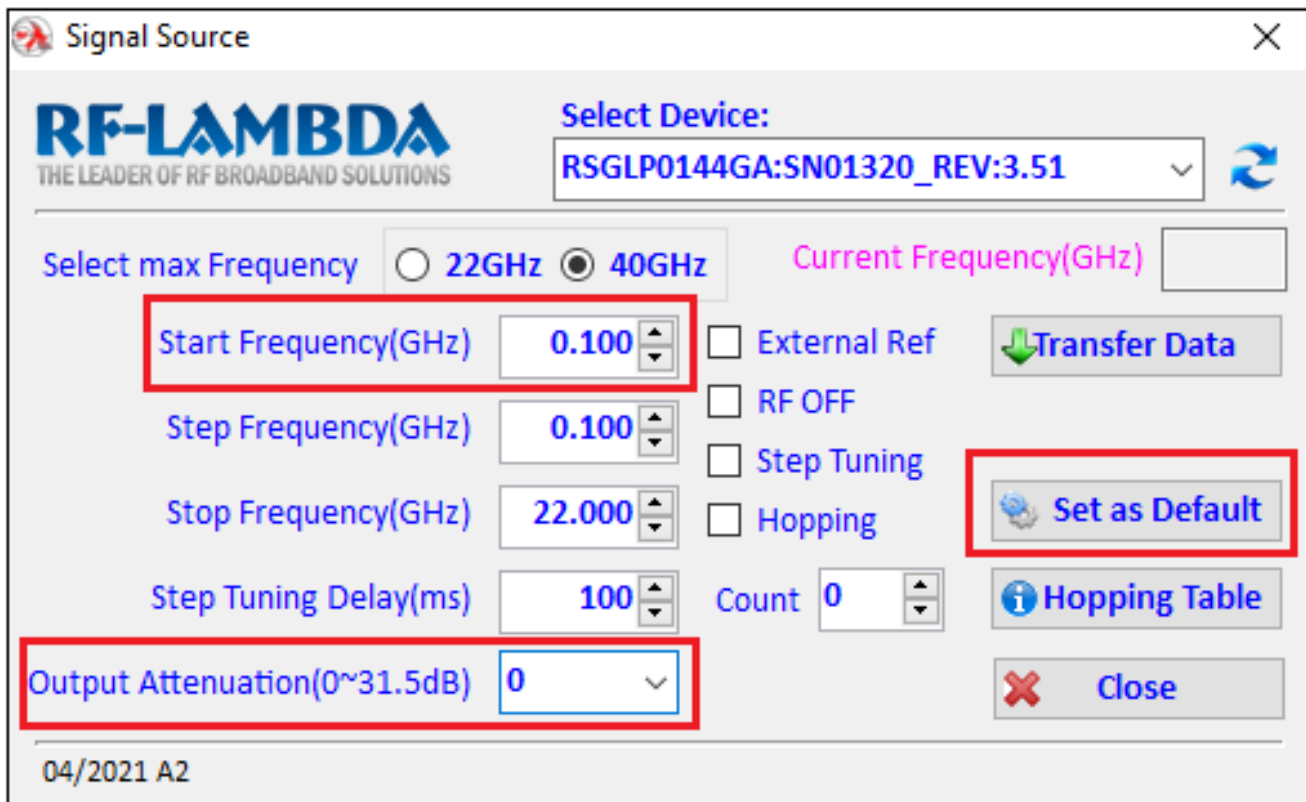



Default State

1. Input “Start Frequency”, “Output Attenuation”, and then click “Set as Default”. The device will store the frequency and the attenuation into flash. It will allow the unit automatically output this frequency and attenuation when the device wakes up. If the customer is using external 10MHz reference, please check “External Ref” button and then set the default state into flash.




Remote Control

Please see the detailed instructions in the driver folder.


Name	Date modified	Type	Size
 dll(C++ bit-32)	2021-04-12 16:35	File folder	
 e.g-C#-RFSG(VS2013)	2021-04-12 16:35	File folder	
 e.g-Labview(2012bit32)-RFSG	2021-04-12 16:35	File folder	
 e.g-VB-RFSG(VS2013)	2021-04-12 16:35	File folder	
 RFSG-Driver	2021-04-12 16:35	File folder	
 Installation Instructions	2021-03-30 09:54	Adobe Acrobat D...	620 KB
 RF Signal Source A2 setup	2021-04-09 15:06	Application	2,020 KB
 Signal Generator DLL Instructions_Rev(A)	2021-04-12 16:36	Adobe Acrobat D...	201 KB

Outline Drawing

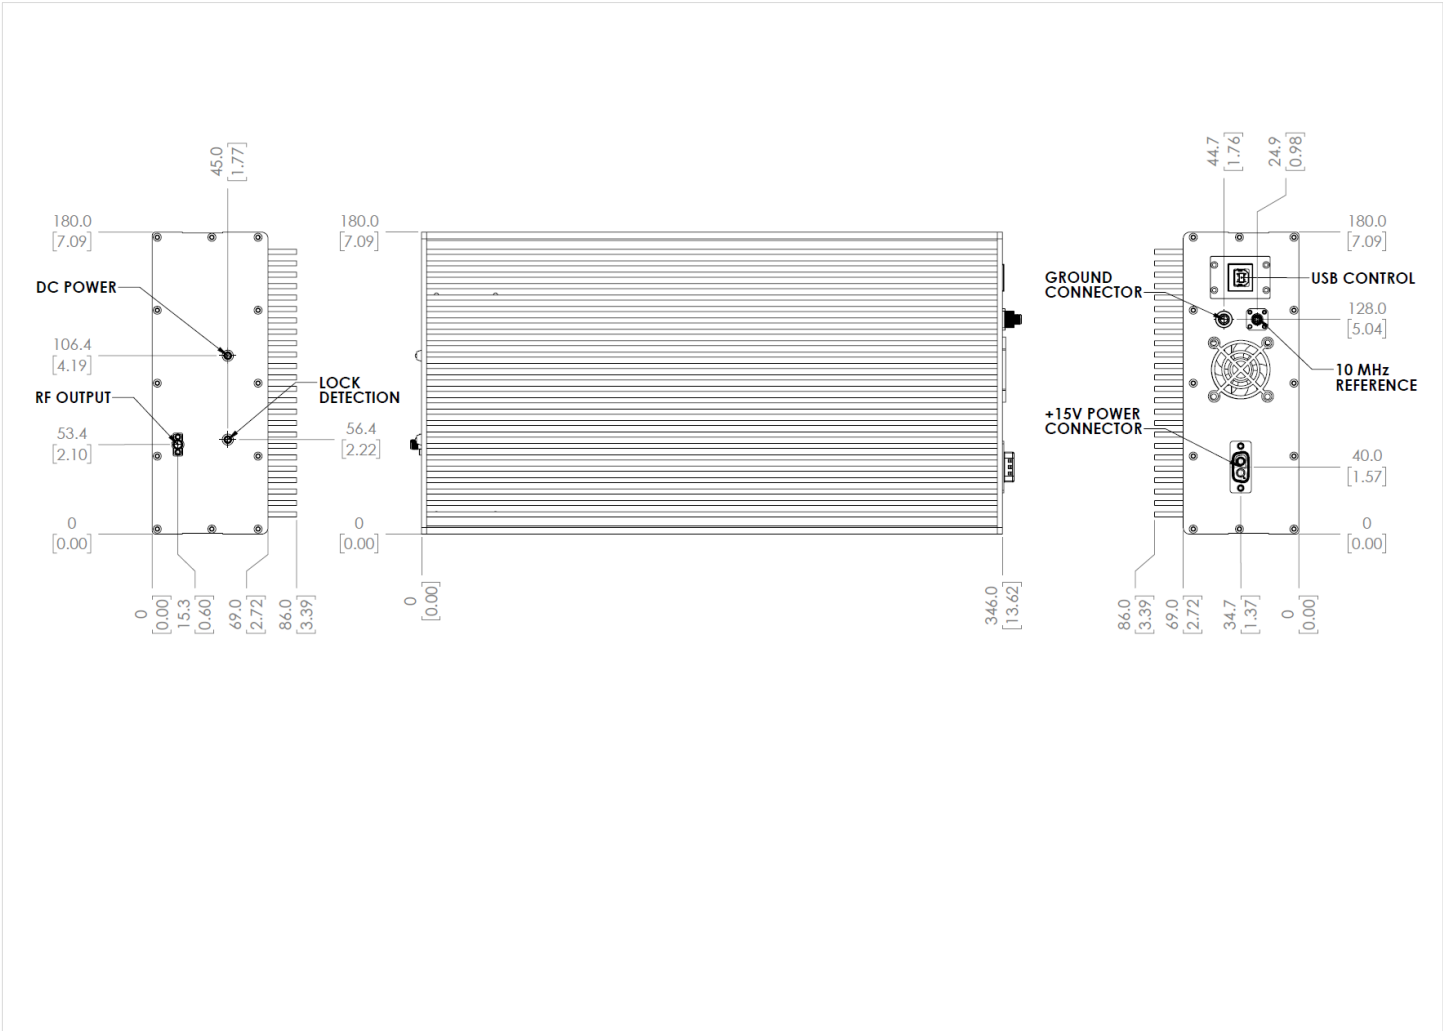

Notes:

1. Package Material: Aluminum or Copper
2. All dimensions are in millimeters [inches].
3. Housing Tolerances ± 0.2 [0.008] unless otherwise specified.
4. Standard torque wrench must be used to secure RF connectors.



Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RSYN01G44GA	connectors USB	0.1-40GHz Ultra Low Phase Noise USB Controlled RF Synthesizer

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.