



Coaxial 50W 90° Hybrid Coupler 400 – 800MHz



Features

- High power handling up to 50W
- Wide band operation
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- High peak to average handling capability

Typical Applications

- Aerospace and military applications
- LMDS multi-carrier operation

Electrical Specifications, $T_A=25\text{ }^\circ\text{C}$

Parameters		Min	Typ	Max	Units
Frequency Range		400		800	MHz
Nominal Coupling			3		dB
Insertion Loss			0.2	0.3	dB
Isolation		22	25		dB
Amplitude Imbalance			± 0.35	± 0.5	dB
Phase Imbalance			± 1	± 2	deg
VSWR			1.15	1.2	: 1
Power Rating	Average	50			W
	Peak	500			W
Impedance		50			Ohms
Weight		0.71			Ounces
Input / Output Connectors		SMA - Female			
Material		Aluminum			
Finishing		Blue paint			

Environmental Specifications


Operational Temperature ($^\circ\text{C}$)	-45 to +85
Storage Temperature ($^\circ\text{C}$)	-55 to +125
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Coaxial 50W 90° Hybrid Coupler 400 – 800MHz




Typical Performance Plots


Loss & Amplitude Imbalance

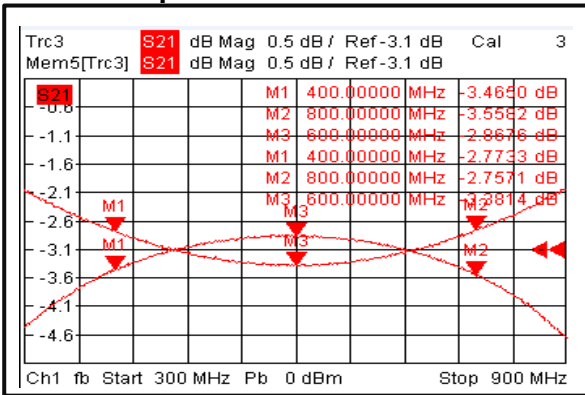


Input VSWR

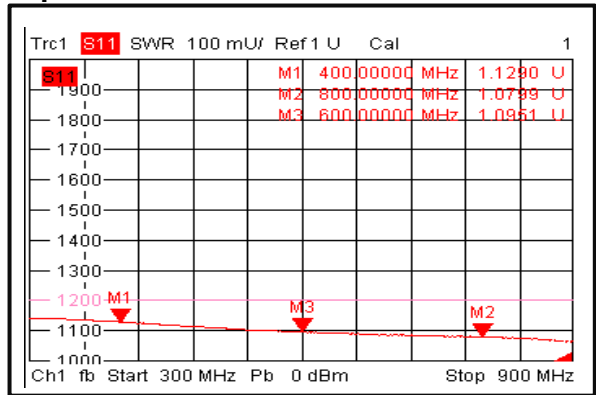


Output VSWR

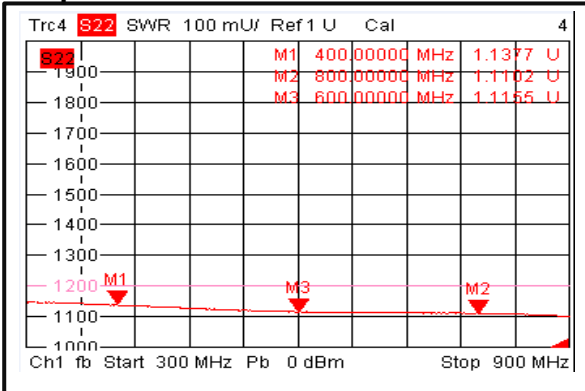


Phase Imbalance

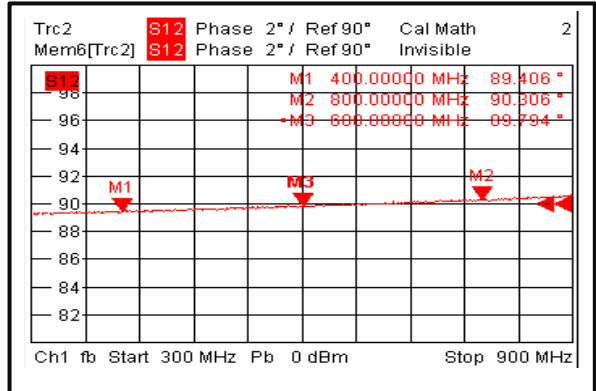


Loss & Amplitude Imbalance

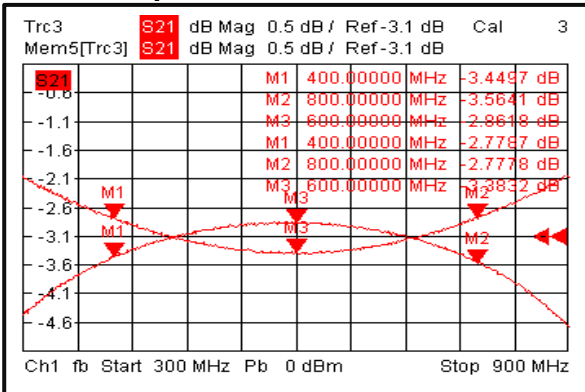


Input VSWR

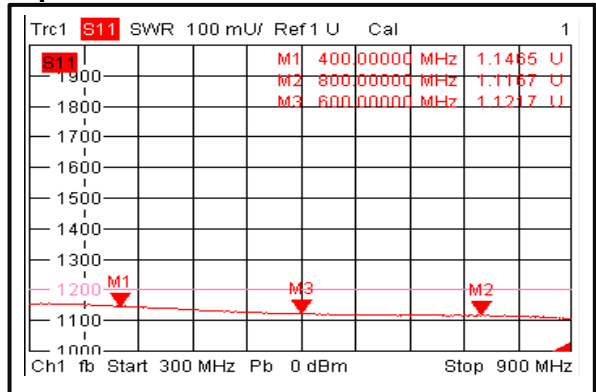

Output VSWR

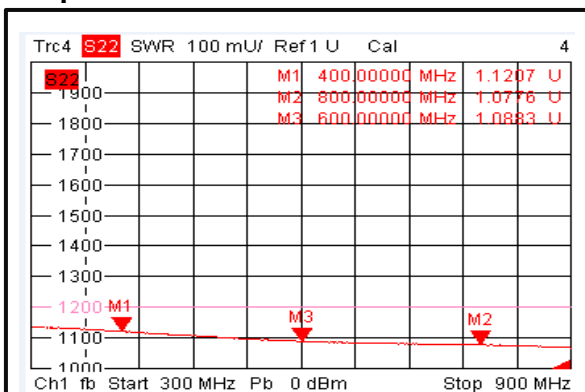


Phase Imbalance

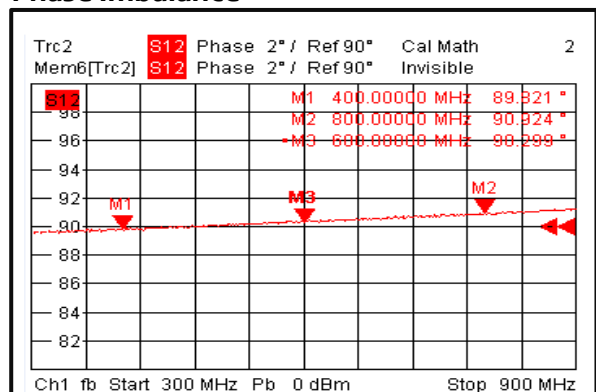




Isolation

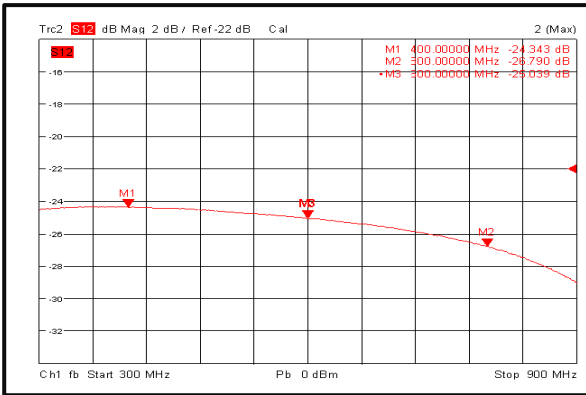

Outline Drawing:

All Dimensions in mm [inches]
Tolerances ± 0.2 [0.008]

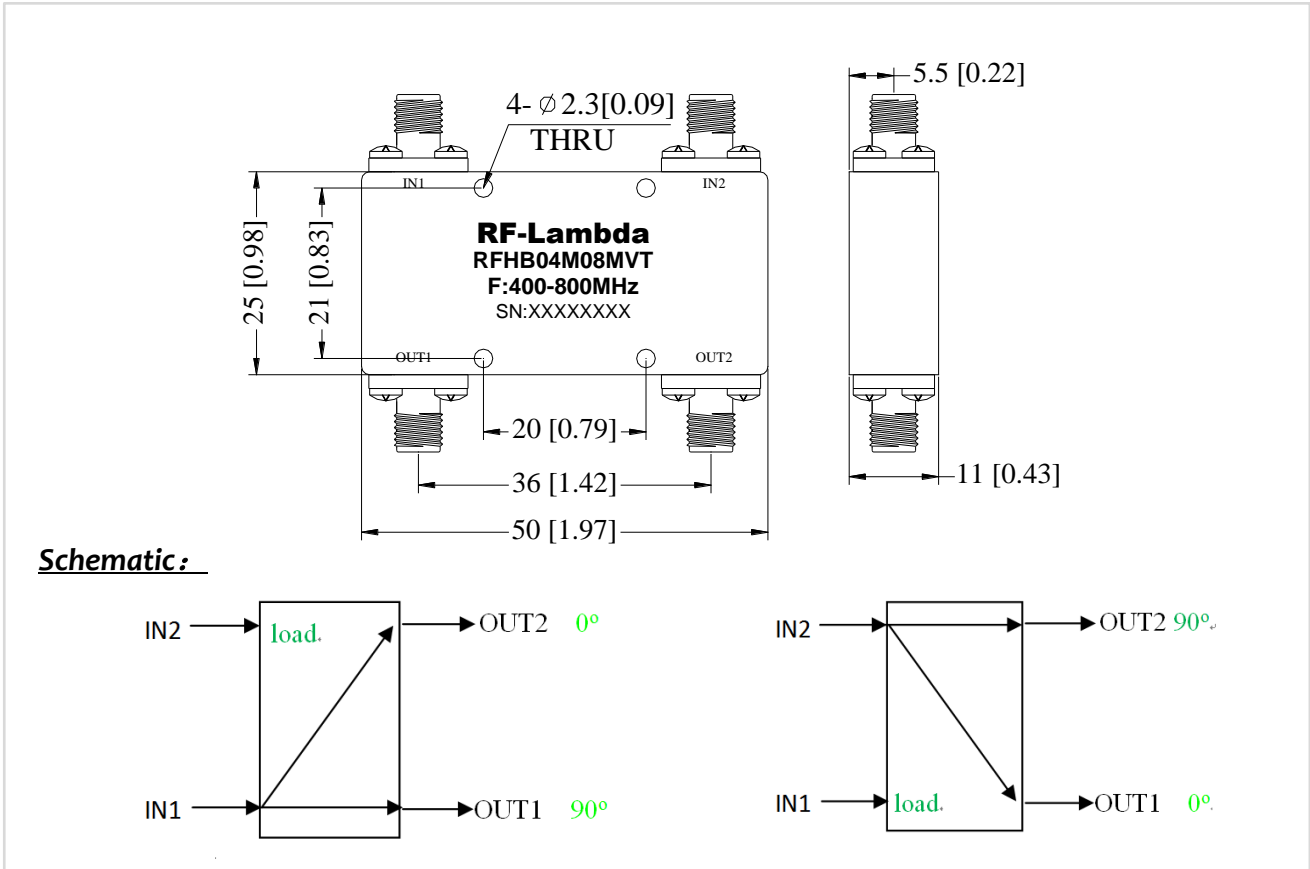

Coaxial 50W 90° Hybrid Coupler 400 – 800MHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.