



### 900M Commercial Band Duplexer Frequency Combiner



- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 20W average GSM CDMA signal
- N-Female and SMA-F connector available upon request
- Storage temperature -50°C~+125 °C
- Operational Temperature: -40 °C ~+85 °C
- Operating Humidity: 0~90% relative



### Specification

Channel Frequency: 909~915MHz  
954~960MHz  
Insertion Loss: 0.6dB typ. 1.0dB max  
Pass band Ripple: 0.5dB p-p maximum  
Return Loss: 18dB minimum

Outband Rejection:  
>90dB @ Channel Isolation

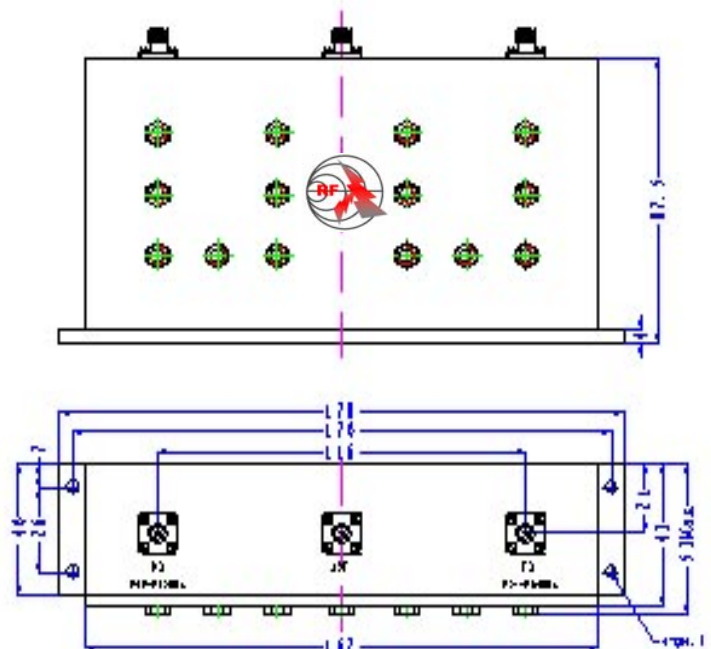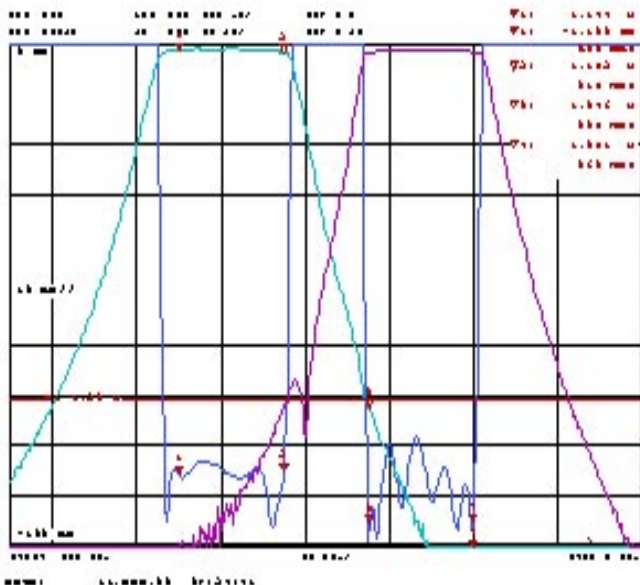

900M COMMERCIAL BAND DUPLER BAND COMBINER