HIGH POWER CAVITY DUPLEXER 909-915MHZ & 954-960MHZ

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative

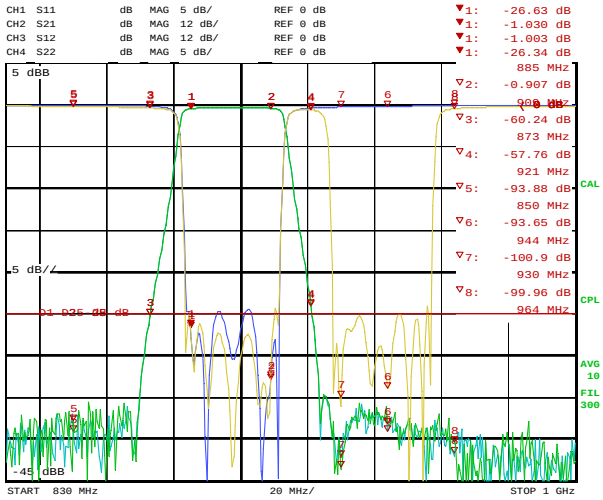

Date: 26.DEC.05 08:19:10

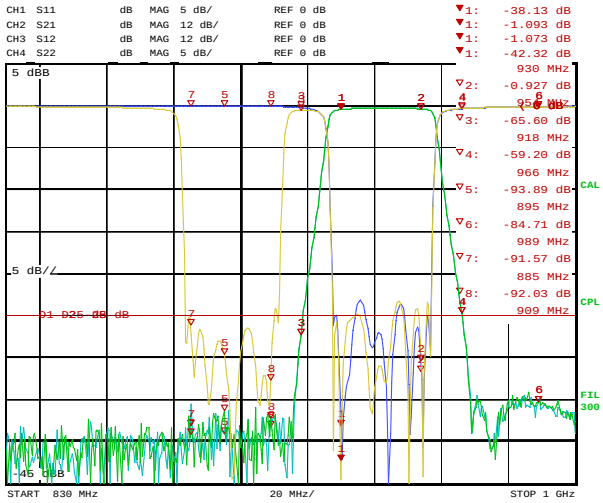

Date: 26.DEC.05 08:38:11

Electrical Specification

Frequency Range:	RX: 909-915MHz TX: 954-960MHz
Insertion Loss:	1.6dB max
Pass band Ripple:	0.8dB maximum
Return Loss:	≤-20dB
Power Handle:	50W
Out band Rejection:	≥85dB@~874 ≥50dB@fo±12M ≥85dB@954-960M

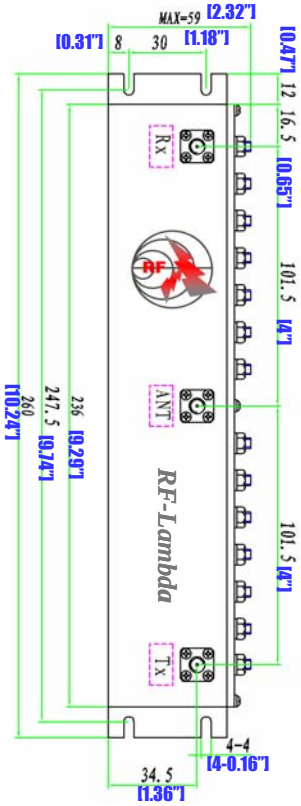

HIGH POWER CAVITY DUPLEXER 909-915MHZ & 954-960MHZ