





HIGH POWER CAVITY DUPLEXER 885-897MHZ & 930-942MHZ

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



HIGH POWER CAVITY DUPLEXER 885-897MHZ & 930-942MHZ

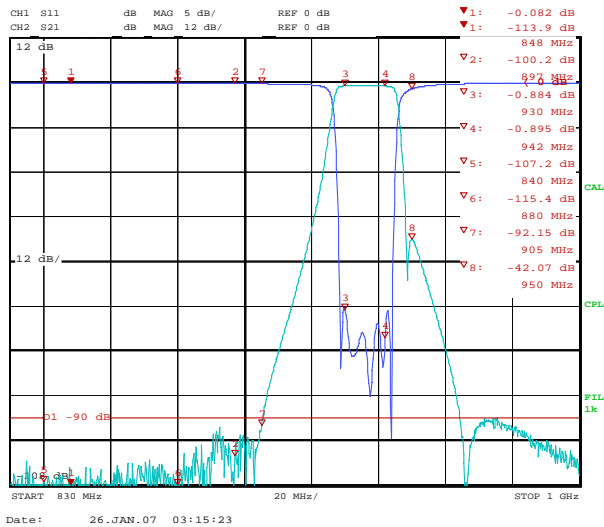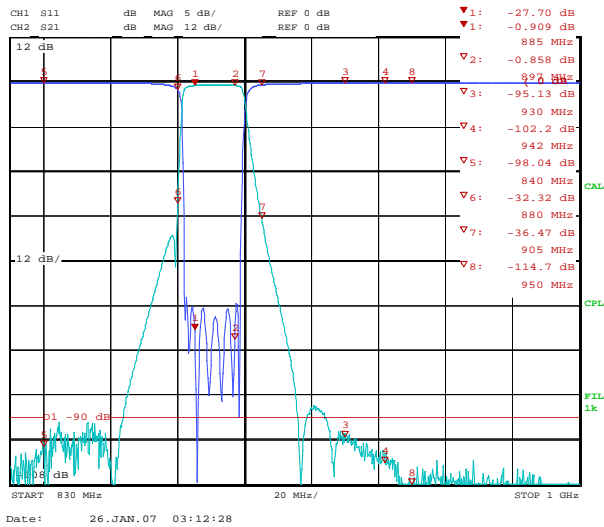

Electrical Specification

- Frequency Range:** RX: 885-897MHz
TX: 930-942MHz
- Insertion Loss:** 1.2dB max
- Pass band Ripple:** 0.6dB maximum
- Return Loss:** ≤21dB
- Power Handle:** 50W
- Channel Rejection:** 90dB
- Offset Rejection:** 60dB

