HIGH POWER CAVITY DUPLEXER 885-909MHZ & 930-954MHZ

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative

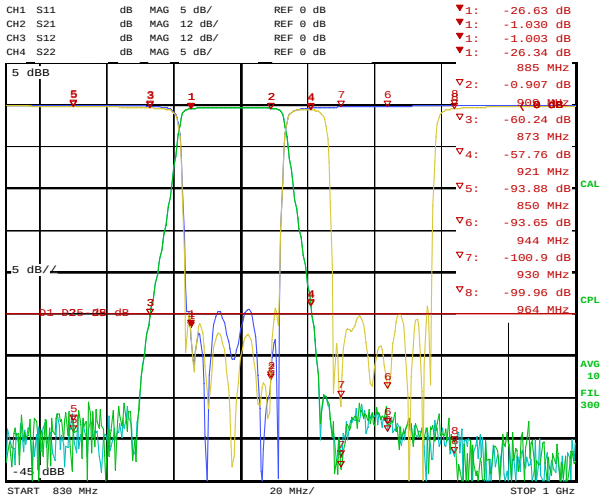

Date: 26.DEC.05 08:19:10

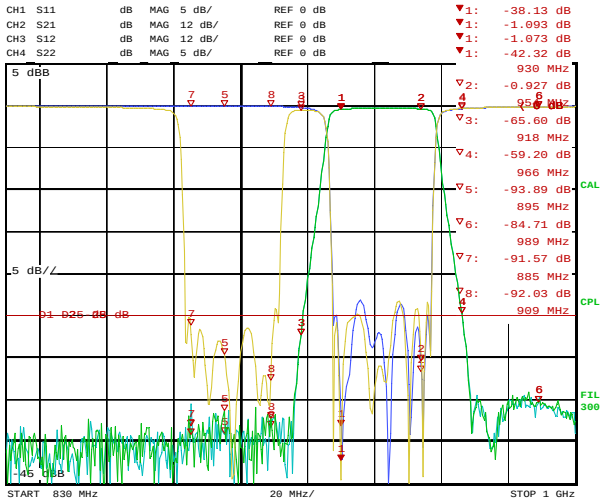

Date: 26.DEC.05 08:38:11

Electrical Specification

Frequency Range:	RX: 885-909MHz TX: 930-954MHz
Insertion Loss:	1.2dB max
Pass band Ripple:	0.8dB maximum
Return Loss:	≤-20dB
Power Handle:	50W
Channel Rejection:	85dB
Offset Rejection:	35dB

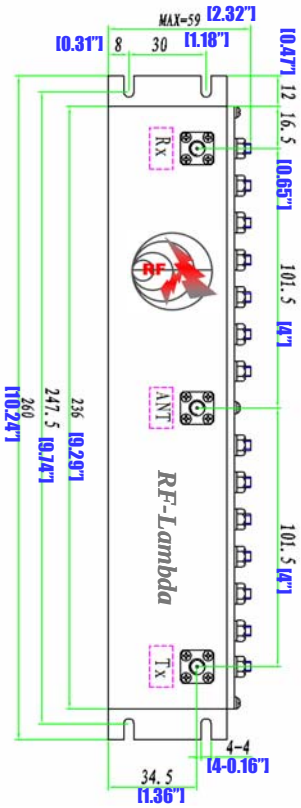

HIGH POWER CAVITY DUPLEXER 885-909MHZ & 930-954MHZ