



RF-LAMBDA

The power beyond expectations



RFDUP210504D

HIGH POWER CAVITY DUPLEXER 1850-1855MHZ & 2140-2145MHZ

- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- N-Female and SMA-F connector available upon request
- Storage temperature -40~+85C
- Operational Temperature: -30~+75C
- Operating Humidity: 0~90% relative



HIGH POWER CAVITY DUPLEXER 1850-1855MHZ & 2140-2145MHZ

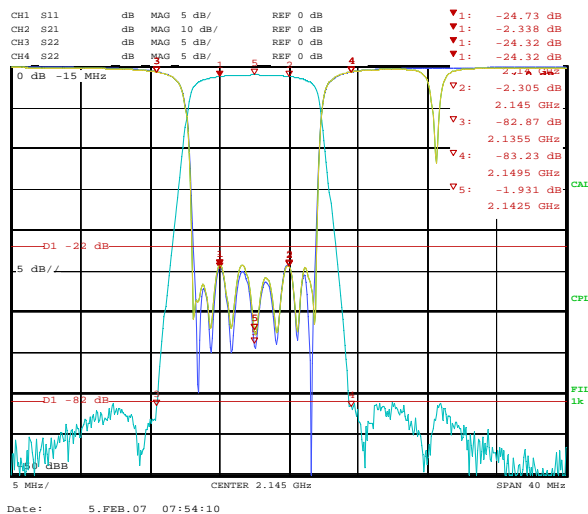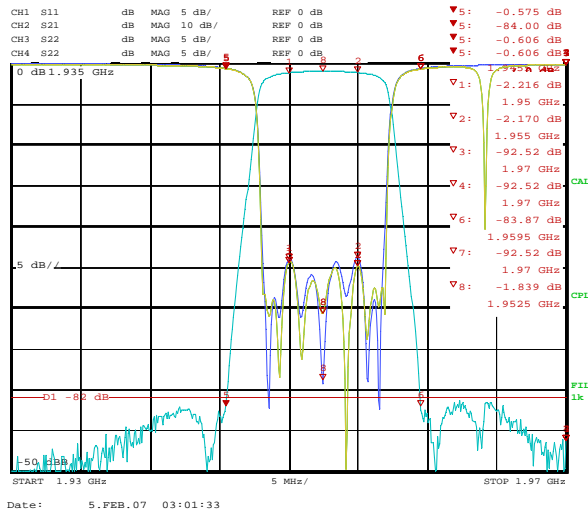

Electrical Specification

- Frequency Range:** RX: 1950-1955MHz
TX: 2140-2145MHz
- Insertion Loss:** 0.3dB max
- Pass band Ripple:** 0.5dB maximum
- Return Loss:** ≤20dB
- Power Handle:** 300W
- Out band Rejection:** ≥80dB@fo ± 7.5M

