


Wide Band Power Amplifier 6GHz-12GHz

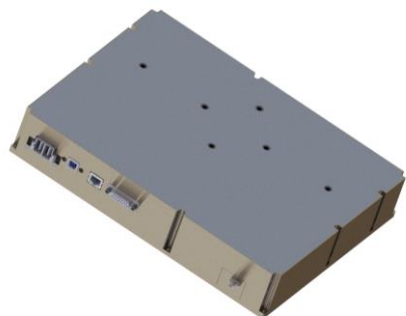

Product Description

RFLUPA06G12GE is a wideband power amplifier with a frequency range of 6 to 12GHz.

The power output of this amplifier is 53dBm typical. The typical small signal gain is 70dB with a gain flatness of ± 10 dB. This excellent performance is achieved through the use of GaN devices.

The power amplifier's input connector is SMA and output connector is WRD500D36. This product has a calibration feature which enables customer to obtain great performance through time and temperature changes.

The operating temperature of this product is within -40 to +85°C.

Features

- Wideband Solid State Power Amplifier
- Small Signal Gain 70dB Typical
- Output Saturation Power 53dBm Typical
- Supply Voltage +48VDC
- 50 Ohm Matched Input/Output
- Overvoltage Protection
- Overcurrent Protection
- Auto Calibration

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		6 – 10			10 – 12		GHz
Small Signal Gain		70			65		dB
Gain Variance		+/-5			+/-4		dB
Gain Variation Over Temperature (-40°C to +70°C)		+/-3			+/-3		dB
Output 1dB Compression Point (P1dB)		47			47		dBm
Saturated Output Power (P _{sat})		54			53		dBm
Supply Current (V _{cc} = +48VDC)		8.5	30		8.5	30	A
IM3		-64			-65		dBc
Weight				TBD			lbs.
Impedance				50			Ohms
Input / Output Connectors				SMA/WRD500D36			
Package				Screw Sealed (Standard)			
				Hermetically Sealed (Optional)			

Note: Special screening is available with extra cost. Please inquire with sales..

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	+60VDC
*RF Input Power (RFIN)	Psat – Large Signal Gain

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure

1. Turn off power supply
2. Remove positive supply Connection
3. Remove RF Connection
4. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-55°C to +125°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Notes:


- Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.
- For vibration testing details please see additional information section

Typical Performance Plots

Gain vs Frequency @+25°C

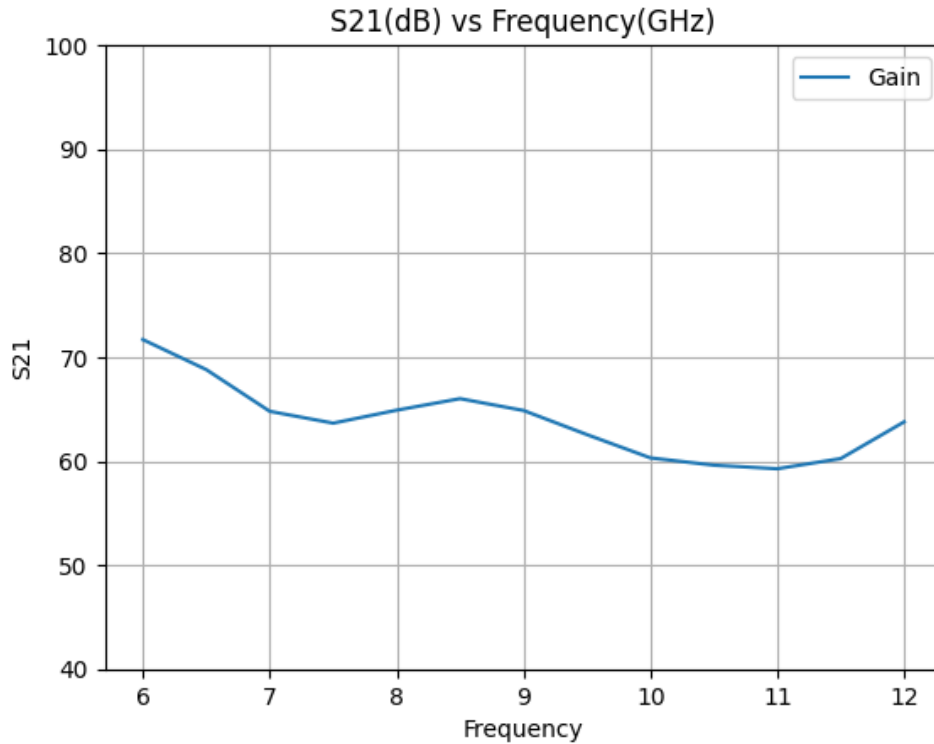


Output Power vs Frequency

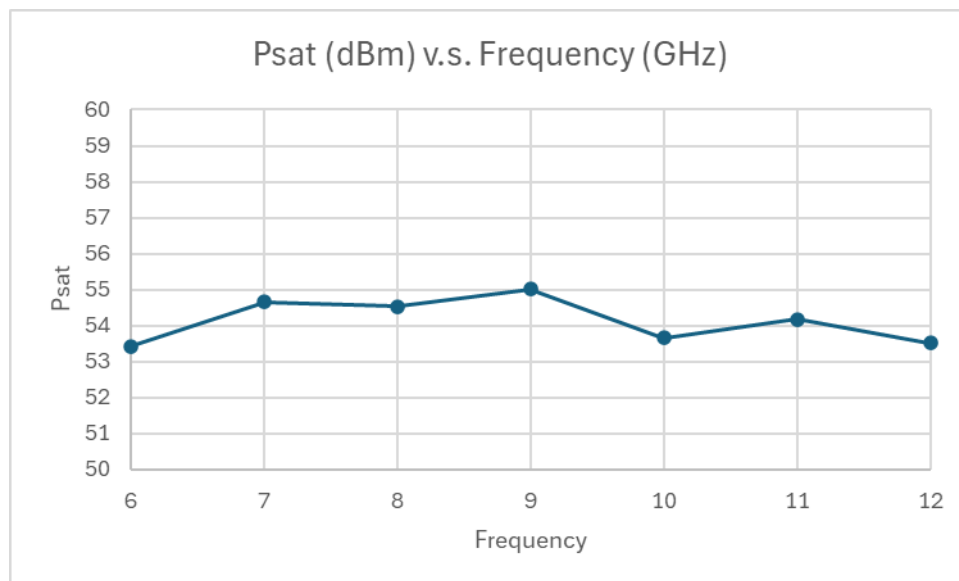

Note: Small signal VNA measurements include attenuators to protect equipment

Protection Connector Table

Female D-Sub is on the housing
The mating female part number: 172-E15-203R001

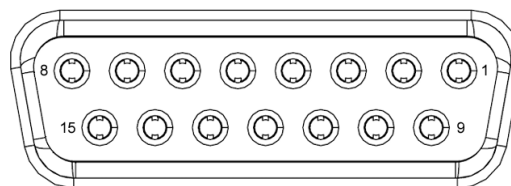


Pin #	Name	Function	Initial State	Description	Applied
1	Reset	Control		Resets PA when logic <u>LOW</u> is applied and released	Yes
2	Gate Disable	Control	LOW	Applying logic <u>HIGH</u> disables gate of amplifiers	Yes
3	Drian Disable	Control	LOW	Applying logic <u>HIGH</u> disables drian of amplifiers	Yes
4	RF IN Over	Indicator	HIGH	Pin will be latched to logic <u>HIGH</u> when input signal is over limit	Yes
5	Temp Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when amplifier is driven over temperature	Yes
6	Current Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when drain current limit is reached	Yes
7	ID Imbalance	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when an imbalance in the drain current of the combining branches occurs	Yes
8	PA Off Alarm	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when any of the protection limit is reached	NO
9	Fan Alarm	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when Fan limit is reached	Yes
10	RF Switch OFF	Control	LOW	Applying logic <u>HIGH</u> turns RF switch to load path	Yes
11	VSWR	Indicator	HIGH	Pin will be latched to logic <u>HIGH</u> when output reflection is over limit	Yes
12	5dB Attenuation	Control	LOW	Applying logic <u>HIGH</u> enables 5dB attenuation	No
13	10dB Attenuation	Control	LOW	Applying logic <u>HIGH</u> enables 10dB attenuation	No
14	+5V	Power Supply	+5V	+5V DC is available for reference 400mA current ability	Yes
15	GND	Ground	GND	Ground	Yes

Notes:

- HIGH/LOW voltages are standard TTL signals 0.0V-0.8V = LOW. 2V-5V = HIGH. Input current is 10uA.
- Matching connector and cable will be shipped with the product.
- Applied=Yes means the feature is included. Applied=No means the feature is not included with this model.
- 5V reference supply can source 700mA.
- Indicator output signals can source 24mA.

Power Supply Connector Table




Part number: 1510350002

Pin #	Gender on the Housing	Function	Initial State	Description	Applied
A1	NA	VDC	VDC	Supply Voltage (this pin is up to 30A)	Yes
A2	NA	GND	GND	GND (this pin is up to 30A)	Yes

Notes:

- Matching connector and cable will be shipped with the product.
- If customer would like to use their own wires, 12 AWG wire is required for high current applications

Outline Drawing

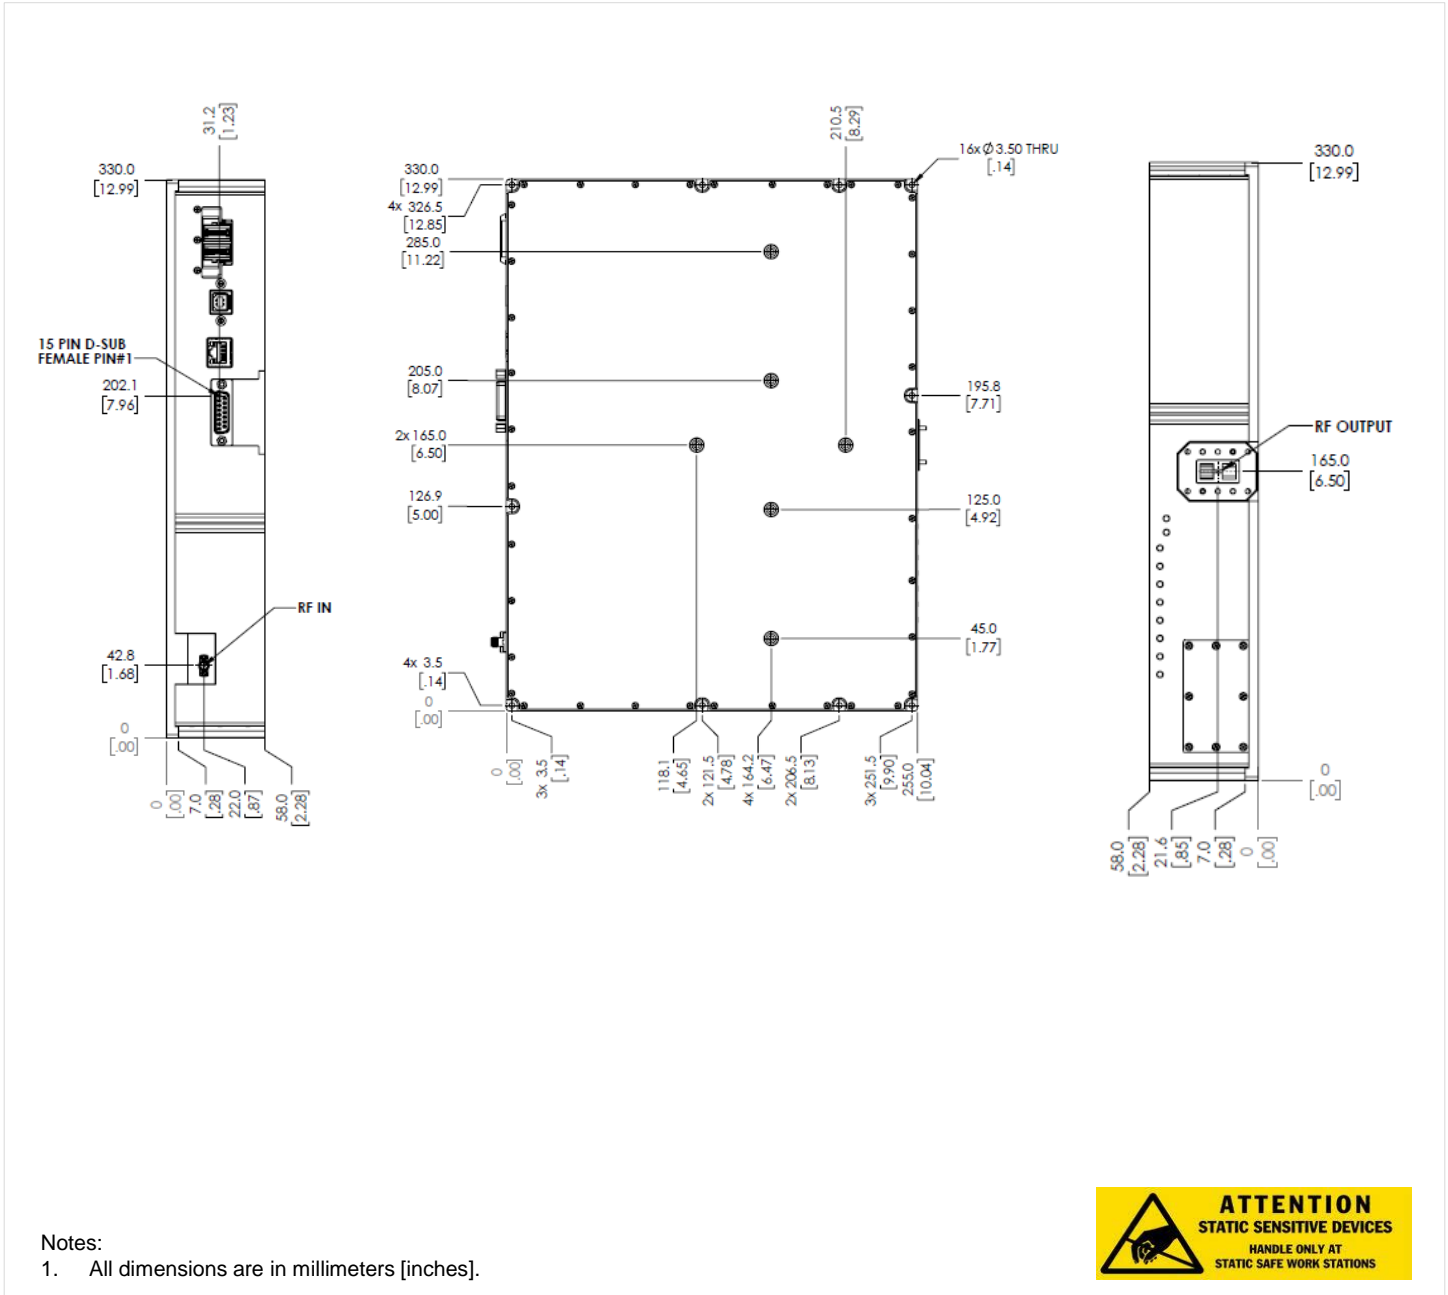

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Heatsink Lookup Specifications	https://rflambda.com/search_heatsink.jsp
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf