



ULTRA WIDE BAND 950-1300MHz CIRCULATOR RFLC202M95G13

1.0 Mechanical Specifications		
1.1	Coaxial Connector	SMA-F or N-F
1.2	External Body Finish	Nickle Plated
1.3	Rotation	Clockwise / Counter-clockwise

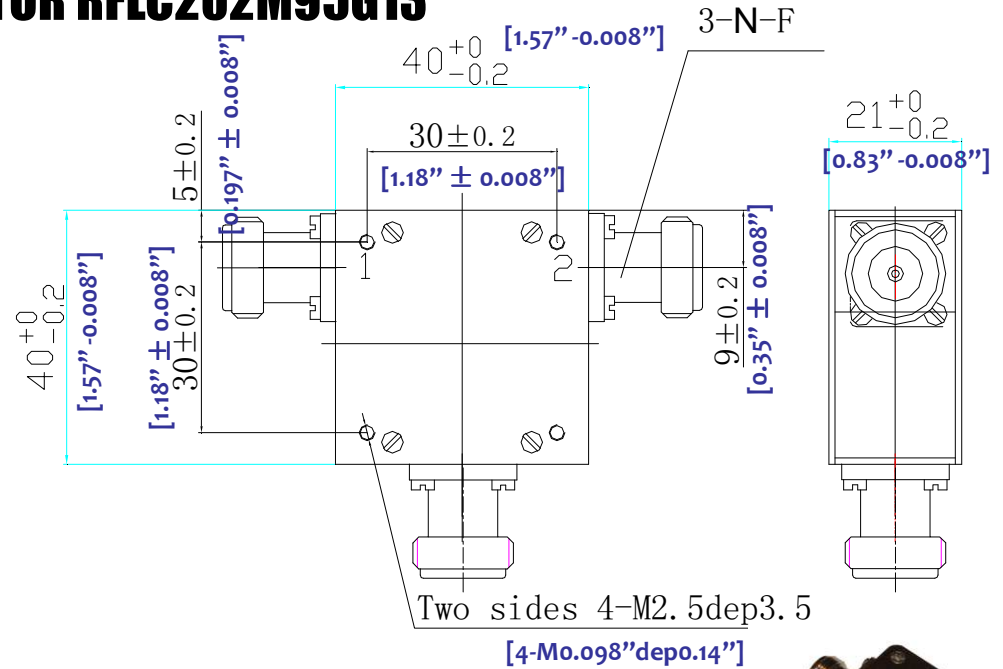


2.0 Environment specifications		
2.1	Opt. Temp.	-40°C~+70°C
2.2	Storage Temp.	-40°C~+85°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msec

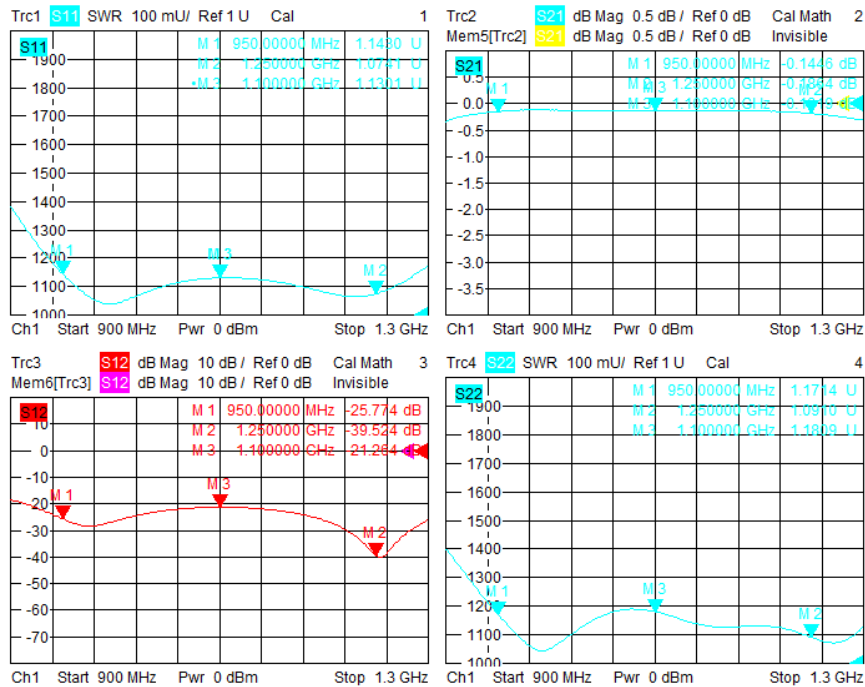

PN	Frequency (MHz)	Insertion loss (dB)	Isolation (dB) min	VSWR (max)	Forward Power (CW)	Reverse Power (CW)
RFLC202M95G13	950-1300	0.4	20	1.25	200	N/A

* All spec. above in 25C degree only.

PAGE 1 OF 1	DATE JAN 8 th 2003
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN RFLC
 RFLC202M95G13 ULTRA WIDE BAND CIRCULATOR	RF-LAMBDA RFLC
www.rflambda.com	CAD MODEL REVISION 02-1
RF-LAMBDA	ASSEMBLY REVISION VS23
SIZE LT	ASSEMBLY NAME RFLVR54
SHEETS 1 OF 1	DRAWING NUMBER D02-12