

RF-LAMBDA

THE LEADER OF RF BROADBAND SOLUTIONS

**280W Wideband EMC
Benchtop Power Amplifier
26GHz-40GHz**

REMC26G40GD10



Sales: sales@rflambda.com

Technical: support@rflambda.com

Rev 1. 01-15-2026 | Subject to change without notice

www.rflambda.com

PRODUCT SUMMARY

PRODUCT OVERVIEW

GENERAL DESCRIPTION

REMC26G40GD10 is a wideband EMC power amplifier with a frequency range of 26 to 40 GHz.

The power output of this amplifier is 53.5dBm typical. The typical small signal gain is 65dB with a flatness of ± 5 dB. This performance is achieved through the use of GaN devices. The power amplifier's input connector is 2.92mm and Output connector is WR-28. This product has a calibration feature which enables customer to obtain great performance through time and temperature changes. The operating temperature of this product is within 0°C to +50°C.



FEATURES

- » Wide band EMC Solid State Power Amplifier
- » Small Signal Gain 65dB Typical
- » Output Saturation Power 53.5dBm Typical
- » Supply Voltage 110/280 VAC 3-phase
- » 50 Ohm Matched Input / Output
- » Fast RF Blanking – Optional
- » Real Time VSWR measurement
- » Internal Signal Generator – Optional
- » Over temperature Protection
- » Over current Protection
- » Over voltage Protection
- » Auto Calibration

TYPICAL APPLICATIONS

- » Wireless Infrastructure
- » Military and Aerospace Applications
- » Test Instrumentation
- » Radar Systems
- » 5G Wireless Communications
- » Microwave Radio Systems
- » TR Modules
- » Research and Development
- » Cellular Base Stations

QUALITY STANDARDS



ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Connector Torque Specifications


https://www.rflambda.com/pdf/Torque_Specifications.pdf

Parameter	Description
Operational Temperature	0°C to +50°C (Ambient Temperature)
Thermal Shock	40°C → +85°C (5 Cycles / 10 hours, Only internal modules tested prior to final assembly)
*Random Vibration	MIL-STD-202G, Table 214-I, Test Condition Letter C, 1.5 Hours Per Axis
High Temperature Burn In	Temperature +50°C for 72 Hours
Storage Temperature	0°C to +125°C



*For vibration testing details please see additional information section.

RF-Lambda is ISO: 9000 certified with 25,000 ft² combined R&D and production space, including an ISO7 10K Clean Room to meet ISO-14644-1.

PRODUCT FUNCTIONS



Local/Remote Control Toggle



EMC Functions

- Output Power Lock
- Automatic Calibration

Mode Selections

- Local
- Remote Control

Product Safety Interlock

- Input Power Overload Protection
- Output Mismatch Protection
- Over temperature Protection
- Over current Protection
- Cooling System Anomaly Protection

Category	Function	Included	Optional (Licensing)	Optional (Hardware)	NOT Applicable
Product Safety Interlock	Input Overload Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Output VSWR Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Current Overload Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Temperature Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Current Imbalance Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Overvoltage and Undervoltage Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	AC Power Abnormality Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
User Operation Functions	Fan Abnormality Protection	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	USB, LAN Communication	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	DB Interface	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Self-Calibration Function	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Gain Compensation Over Temperature	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Current Compensation Over Temperature	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	TDD Control - RF Switch Enable	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	TDD Control - Positive Voltage Enable	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	TDD Control - Negative Voltage Enable	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	GUI Interface	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Parameter Setting	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Gain Calibration Each Stage	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Software ON/OFF Function	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Modularized System Integration	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Remote Software Control ON/OFF	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
EMC Functions	Rotary Gain Adjustment	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Screen Protection Function	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Touch Screen Display	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Developer Interface	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
User Customization Functions	System Log Recording	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Output VSWR Measurement	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Input Power Measurement	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	ALC - Automatic Loop Control Gain	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	AGC - Automatic Gain Control Function	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Input Circulator Protection (Internal Load)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Output Circulator Protection (Internal Load)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Waveguide Adapter (E-H)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Internal Signal Generator	Fast RF Blanking	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Single Frequency Output	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Frequency Auto Sweeping	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	Frequency Hopping	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	External Signal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

REMOTE CONTROL

EMC Amplifier Control Panel

Files Functions Help

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Control Interface USB ETHERNET

COM: COM170

Baudrate 115200

Connect

No Device Connected!

Notes:

1. Please click help menu to select Operation Manual.
2. Please refer to the Operation Manual to configure the port.

04/18 2025 v2.02

EMC Amplifier Control Panel

Files Functions Help

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Back ?

Input Power **-/-** dBm Output VSWR **1.29**

Output Power **41.4** dBm

Temperature **25.5** °C

Frequency **6.000** GHz
Range: 0.600 - 6.000

Attenuation **0.0** dB
Range: 0.0 - 31.5

RF OUTPUT

ON

Disconnect

Set Freq

Set Atte

ALC

AGC

- Current
- Current Imbalance
- Temperature
- Input Power
- Output VSWR
- General

Info Record

Time	Record
2025-10-10 09:	Start Reading Real-Time Data!
2025-10-10 09:	Device Connected!
2025-10-10 09:	Set RF-Output ON Successful!
2025-10-10 09:	Set Frequency as 6.000GHz Su

Save Clear


04/18 2025 v2.02

TECHNICAL DATA SPECIFICATIONS


Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	26		36	37		40	GHz
Small Signal Gain		65				60	dB
Gain Flatness		±5			±3		dB
Gain Variation Over Temperature (0°C to 50°C)		±3			±3		dB
Input Return Loss		-20			-20		dB
Saturated Output Power (Psat)		54.5			53.5		dBm
Power Added Efficiency (PAE)		20			20		%
IM3		25			20		dBc
Turn On/Off Speed (Switch Disable)	ON			100			ns
	OFF			100			ns
Turn On/Off Speed (Gate/Drian control through d-sub connector)	ON			10			ms
	OFF			10			ms
RF Fast Blanking Speed (Optional) (Mute RF Output signal and noise)	ON			20			us
	OFF			1			us
Optional RF Fast Blanking Frequency (Optional)				1			kHz
Weight			180				lbs.
Impedance			50				Ohms
*RF Input Power (RFIN)			Psat – Large Signal Gain				
Package			13U Rack-mount/Tabletop Chassis				
Cooling System			Forced air (self contained fans)				
Supply Voltage			208VAC 3-phase				V
Supply Frequency			47 to 63				Hz
Max Supply Power at PSat			5000				W

*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.

TYPICAL PERFORMANCE PLOT

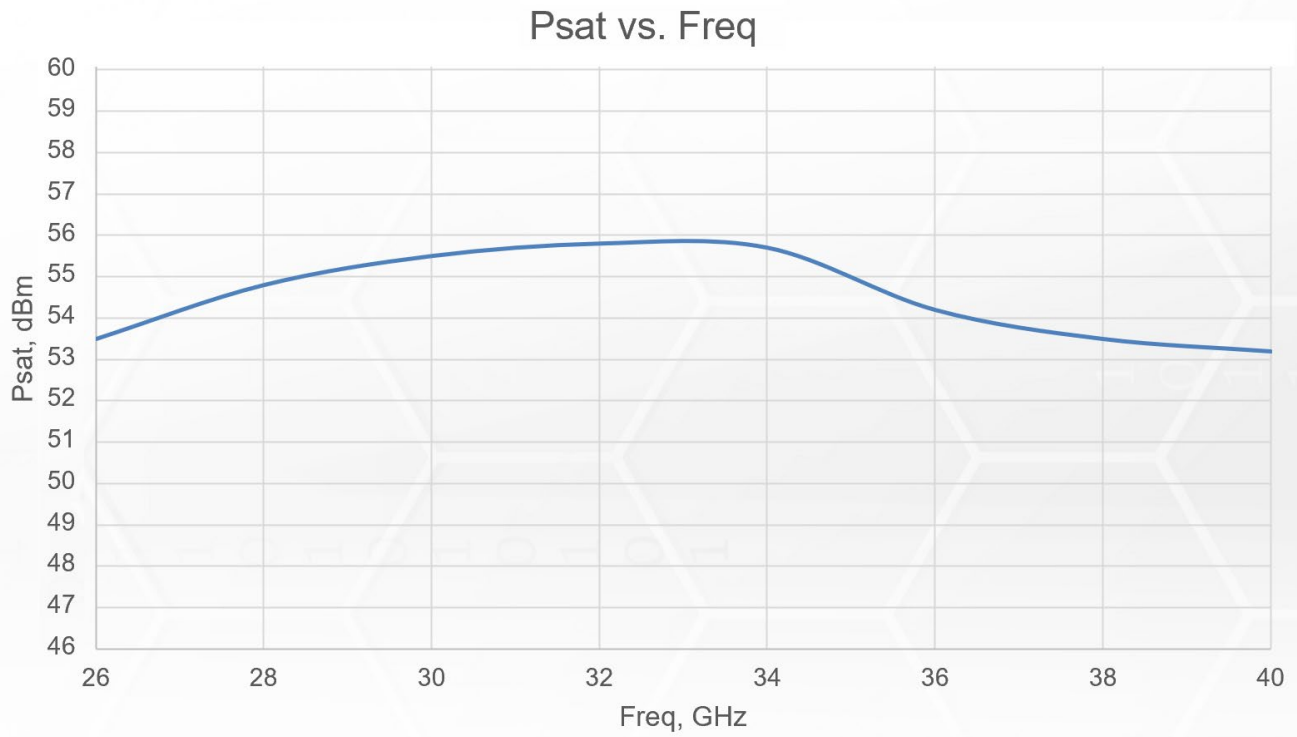

INSTRUCTIONS FOR USE

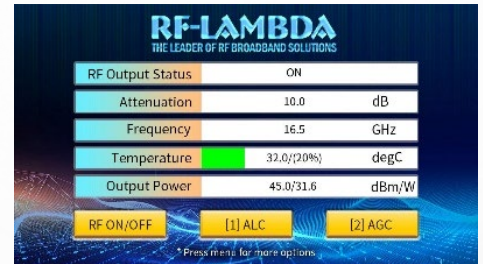

Please follow the instructions on the front panel LCD screen after switching on the power. Press “1” on keypad to continue.

Please follow the instructions.

Name	Description
RF Output Status	Indicates instrument RF output status. It will display: ON or OFF
Attenuation	RF output attenuation (change with adjustment knob)
Frequency	RF input signal frequency (For illustrative purposes only)
Temperature	Instrument temperature (For illustrative purposes only)
Output Power	Instrument RF output power (For illustrative purposes only)
RF ON/OFF	Switches On or Off for instrument RF output port
ALC	ALC mode , Automatic Loop Control (optional)
AGC	AGC mode , Automatic Gain Control (optional)

VAC POWER SUPPLY PLUG

**America
Configuration:
L21-30P PLUG**



or

**EU CEE32
Configuration:**




*Power supply plug type should be requested with PO



PROTECTION CONNECTOR TABLE

Female D-Sub is on the housing
The mating male part number: 172-E15-203R001

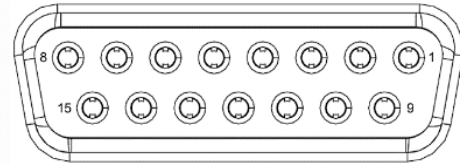

Pin #	Name	Function	Initial State	Description	Applied
1	Reset	Control	HIGH	Resets PA when logic <u>LOW</u> is applied and released	Yes
2	Gate Disable	Control	LOW	Applying logic <u>HIGH</u> disables gate of amplifiers	Yes
3	Drain Disable	Control	LOW	Applying logic <u>HIGH</u> disables drain of amplifiers	Yes
4	RF Input Over Drive	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when input signal is over limit	Yes
5	Temp Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when amplifier is driven over temperature	Yes
6	Current Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when drain current limit is reached	Yes
7	Current Imbalance	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when an imbalance in the drain current of the combining branches occurs	Yes
8	PA Off Alarm	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when any of the protection limit is reached	Yes
9	Fan Alarm	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when Fan limit is reached	Yes
10	RF Input Switch	Control	LOW	Applying logic <u>HIGH</u> turns RF switch to load path	Yes
11	VSWR	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when output reflection is over limit	Yes
12	Fixed Attenuation 5dB	Control	LOW	Applying logic <u>HIGH</u> enables 5dB attenuation	No
13	Fixed Attenuation 10dB	Control	LOW	Applying logic <u>HIGH</u> enables 10dB attenuation	No
14	+5V	Power Supply	+5V	+5V DC is available for reference 400mA current ability	Yes
15	GND	Ground	GND	Ground	Yes

Notes:

- HIGH/LOW voltages are standard TTL signals 0.0V-0.8V = LOW. 2V-5V = HIGH. Input current is 10uA.
- Matching connector and cable will be shipped with the product.
- Applied=Yes means the feature is included. Applied=No means the feature is not included with this model.
- 5V reference supply can source 700mA.
- Indicator output signals can source 24mA.

PACKING LIST



Each rackmount amplifier is shipped in a well protected case and pallet.

ORDERING INFORMATION

Part Number	Modification	Description
REMC26G40GD10	Input connector 2.92mm and Output connector WR28	280W 26GHz-40GHz Wideband Rackmount EMC Power Amplifier

AMPLIFIER USE

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing. Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

IMPORTANT NOTICE

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.