

Hermetically Sealed Wide Band Low Noise Amplifier 6GHz~18GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Features

- Gain: 20dB Typical
- Noise Figure: 2dB Typical
- P1dB Output Power: +15dBm Typical
- Supply Voltage: +4V
- Drop in Package

Typical Applications

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement

Electrical Specifications, TA = +25°C, Vcc = +4V

Parameter	Min.	Typ.	Max.	Units
Frequency Range	6		18	GHz
Gain		20		dB
Gain Flatness		±1.0		dB
Gain Variation Over Temperature (-40 ~ +85)		±1.0		dB
Noise Figure		2		dB
Input VSWR			2.0	:1
Output VSWR			2.0	:1
Output 1dB Compression Point (P1dB)	15			dBm
Saturated Output Power (Psat)		17		dBm
Output Third Order Intercept (IP3)		25		dBm
Supply Current (Vcc=+4V)			90	mA
Isolation S12		-30		dB
Impedance		50		Ohms
Input / Output Connectors	SMA -Female			
Finish	Gold Plated			
Material	Kovar			
Package Sealing	Hermetically Sealed			

Hermetically Sealed Wide Band Low Noise Amplifier 6GHz~18GHz

Absolute Maximum Ratings

Operating Voltage	+4.5V
RF Input Power	10dBm

Biasing Up Procedure

Step 1	Connect Ground Pin
Step 2	Connect input and output
Step 3	Connect +4V biasing
Power OFF Procedure	
Step 1	Turn off +4V biasing
Step 2	Remove RF connection
Step 3	Remove Ground.


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C~+85°C (Case Temperature)
Storage Temperature	-50°C~+105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Hermetically Sealed Wide Band Low Noise Amplifier 6GHz~18GHz

Outline Drawing:

All Dimensions in mm [inches]

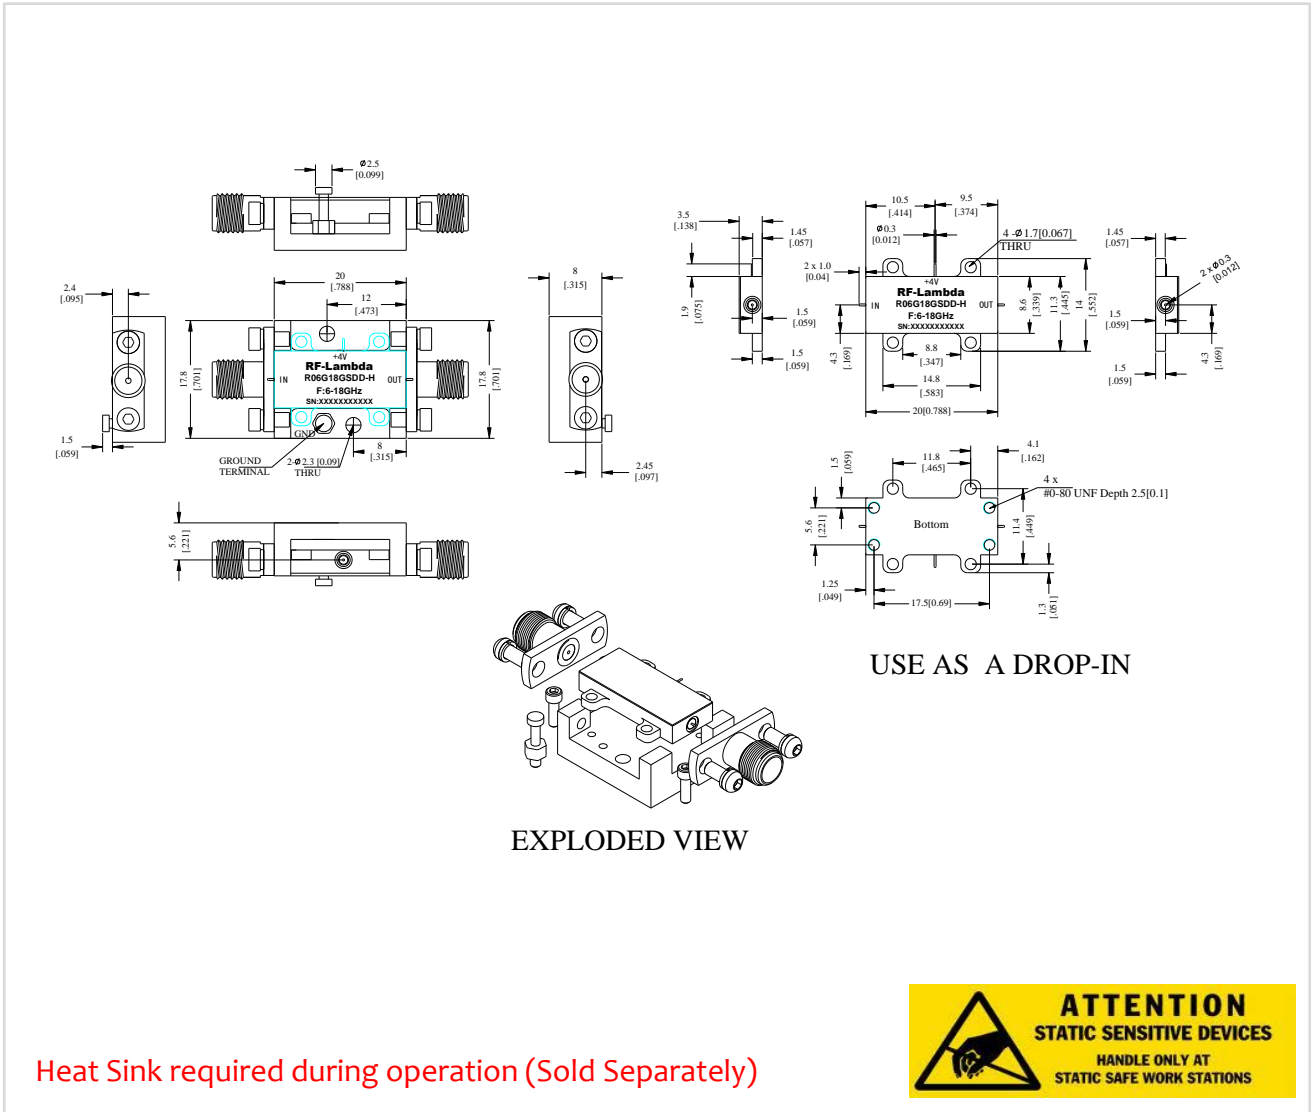

Ordering Information

Part No.	Description
Ro6G18GSDD-H	Hermetically Sealed 6-18GHz Wide Band Low Noise Amplifier

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Hermetically Sealed Wide Band Low Noise Amplifier 6GHz~18GHz