




Ultra Wide Band 50W Bi-Directional Coupler 0.5GHz-6.0GHz

- Ultra wide band performance 0.5G-6GHz
- power operation up to 50W CW
- Compact size and low loss.
- Low passive inter-modulation product.
- Customized unit available.
- Applicable for base station, repeaters of CMDA cellular network



Electrical Specifications			
Frequency	0.5G-6GHz	Power	50W CW
VSWR	1.25 : 1	Insertion Loss	0.7dB
Directivity	18dB	Coupling	15 ± 1.0dB
Environmental Specifications			
Oper.Temp.	-55°C to 85°C base plate	Storage Temp.	-55°C to 100°C base plate
Altitude	45,000 ft		
Mechanical Specifications			
Humidity	95% relative humidity, 65°C 96Hour	Mechanical shock	30G, 11mSec half sin wave, 3 axis both directions
Vibration:	14.2g RMS (15-2000Hz) functional	Connectors:	SMA-Female Brass, Nickel Plate
	16.2g RMS (15-2000Hz) endurance, 1 hour/axis		Beryllium Copper, Gold Plate PIN

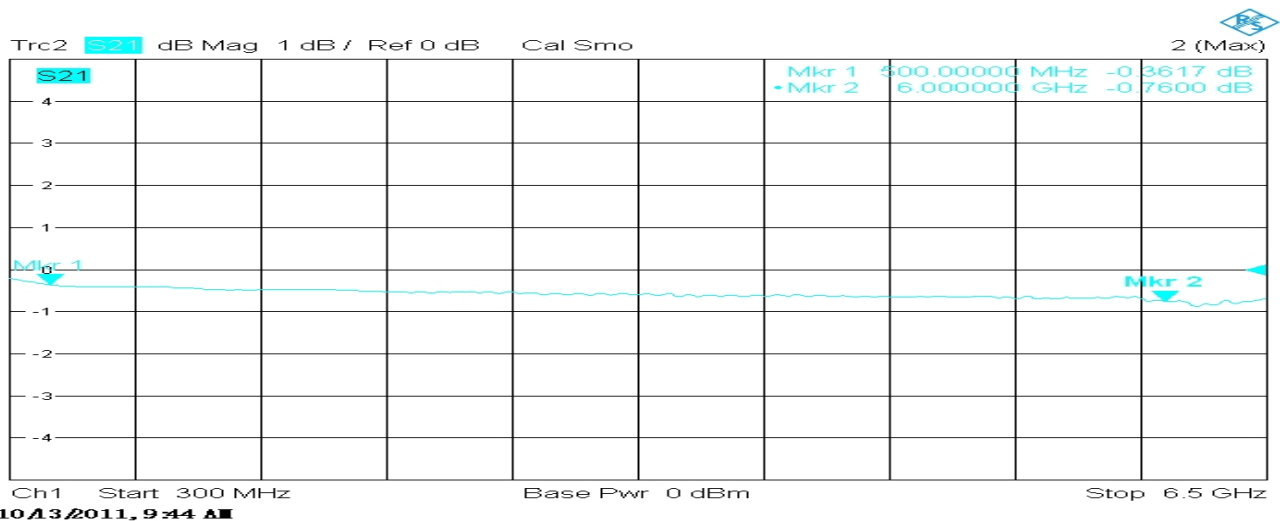


ULTRA WIDE BAND 50W BI-DIRECTIONAL COUPLER 0.5GHz-6GHz




RF-LAMBDA

The power beyond expectations

RFDC5Mo6G15

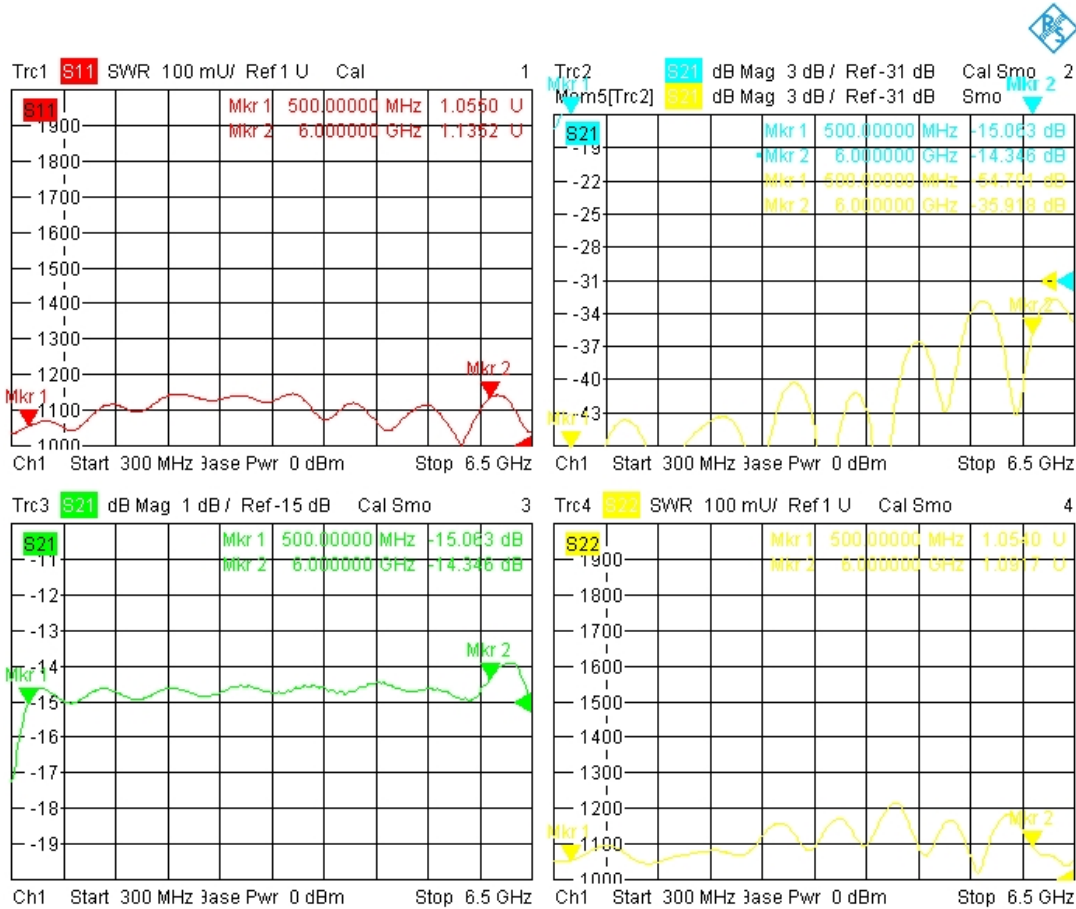

10A3/2011, 9:42 AM

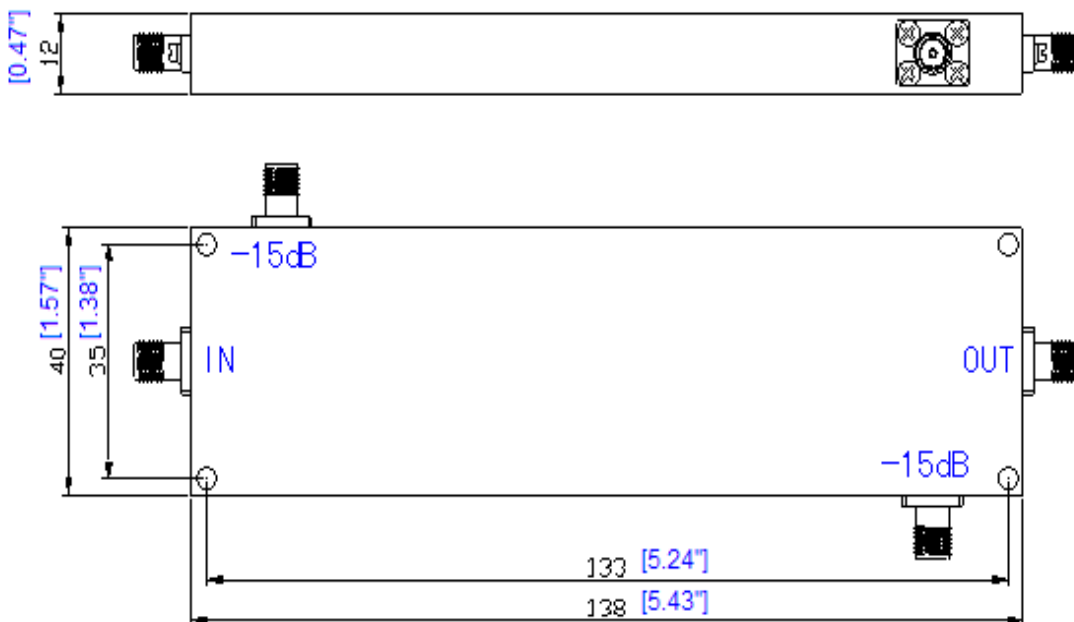

ULTRA WIDE BAND 50W BI-DIRECTIONAL COUPLER 0.5GHZ-6GHZ