


200W HIGH POWER 3dB 90° HYBIRD


1.92GHz-2.17GHz

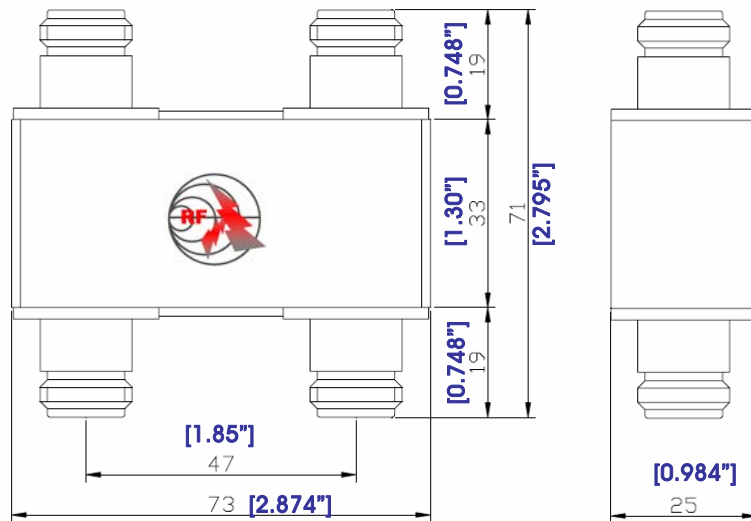

1.0 Mechanical Specifications		
1.1	Connector	7/16Brass, Nickel Plate
1.2	Connect Pins	Beryllium Copper, Gold Plate
1.3	Housing	Aluminum, Gray paint
1.4	Weight	0.4/0.3kg
1.5	Insulators	Ptec, Virgin Electrical grade

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-65°C~+150°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

3.0 Electrical Specifications								
Part Number	Freq. (GHz)	CW Power (W)	IL (dB)	Ripple (dB)	VSWR	Amplitude Balance	Phrase Balance	Isolation
RFHB19M02GVT	1.92-2.17	200	≤0.3	±0.2	≤1.15	3 ±0.35 dB	±3°	≥30

PAGE 1 OF 1		DATE	Oct 5 2006
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	RFPC
 ULTRA HIGH POWER 3dB HYBIRD		RF-LAMBDA	RFPC
www.rflambda.com		CAD MODEL REVISION	08
RF-LAMBDA		ASSEMBLY REVISION	VS4A2
SIZE LT		ASSEMBLY NAME	RFLVR07
SHEETS		DRAWING NUMBER	D05-2
1 OF 1			