



# RF-LAMBDA

The power beyond expectations

RSHB02G04GV









## 60W 2.0-4.0GHz 90° Hybrid Coupler

### Summary:

- . High power operational up to 200W CW
- . Small compacted package
- . Wide bandwidth, flat frequency response
- . MIL-E-5400 standard

### Electrical and Environmental Specifications:

Frequency Range:	2.0-4.0GHz
Insertion Loss:	0.350B
Isolation:	17dB
Amplitude Unbalance:	± 0.5dB
Phase unbalance:	± 2.5degree
Power:	60W CW
VSWR:	1.30 : 1
Operational Temp. Range:	-55°C~+100° C
Storage Temp. Range:	-55°C~+125° C

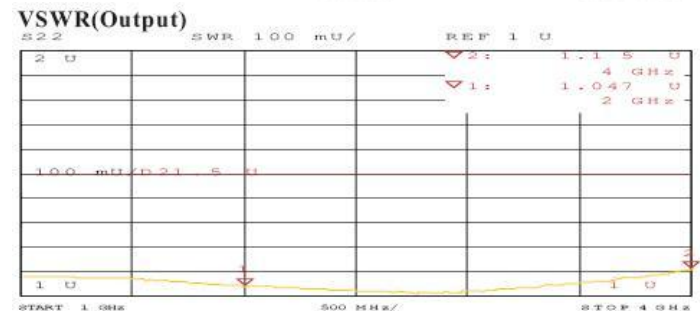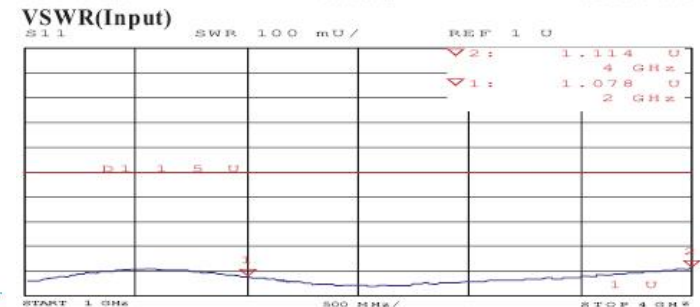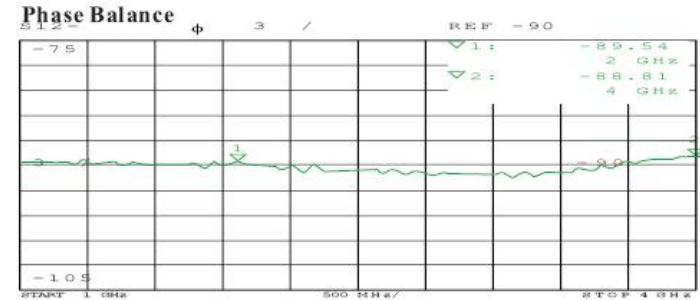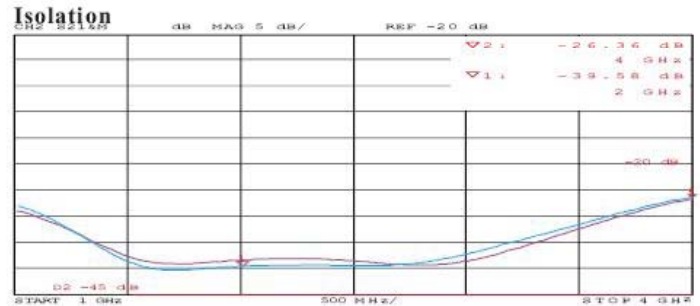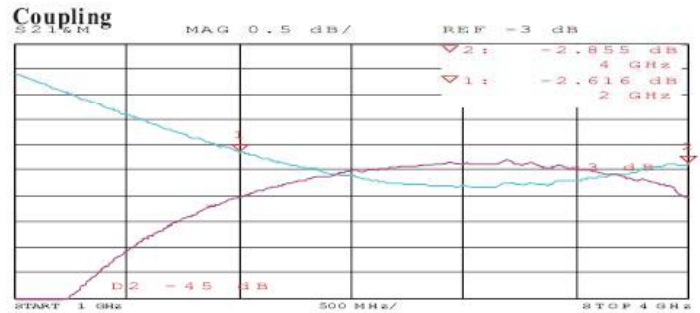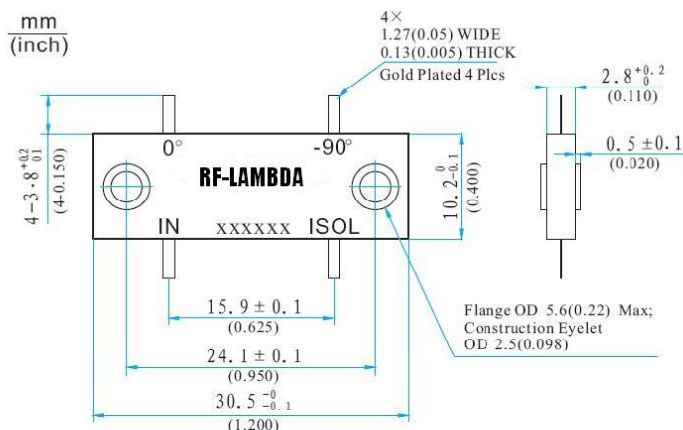

Surface Mount 60W 2.0-4.0GHz 90° Hybrid Coupler