



# RF-LAMBDA

The power beyond expectations

RSHB08M15MV









## 120W 0.75-1.5GHz 90° Hybrid Coupler

### Summary:

- . High power operational up to 200W CW
- . Small compacted package
- . Wide bandwidth, flat frequency response
- . MIL-E-5400 standard

### Electrical and Environmental Specifications:

Frequency Range:	0.75~1.5GHz
Insertion Loss:	0.30dB
Isolation:	18dB
Amplitude Unbalance:	± 0.5dB
Phase unbalance:	± 2.0degree
Power:	120W CW
VSWR:	1.25 : 1
Operational Temp. Range:	-55°C~+100° C
Storage Temp. Range:	-55°C~+125° C

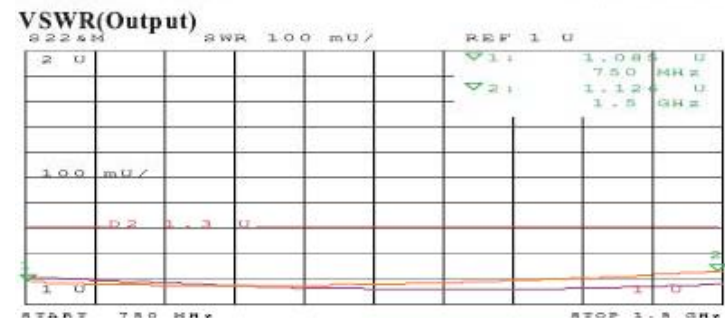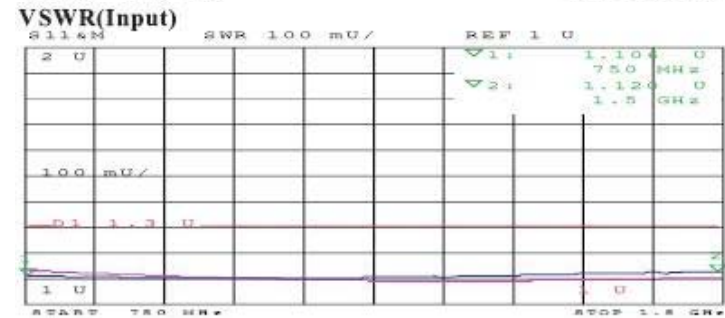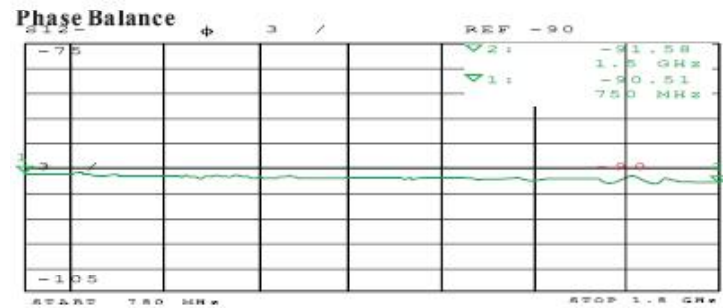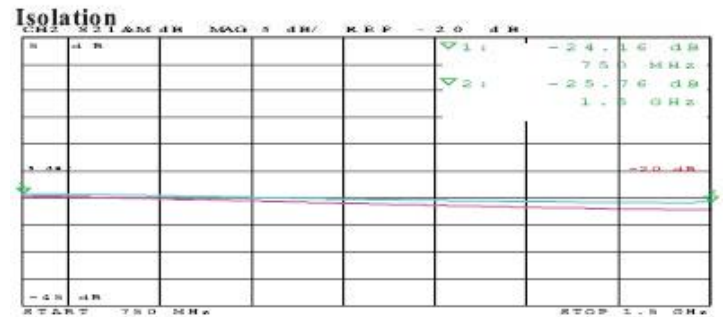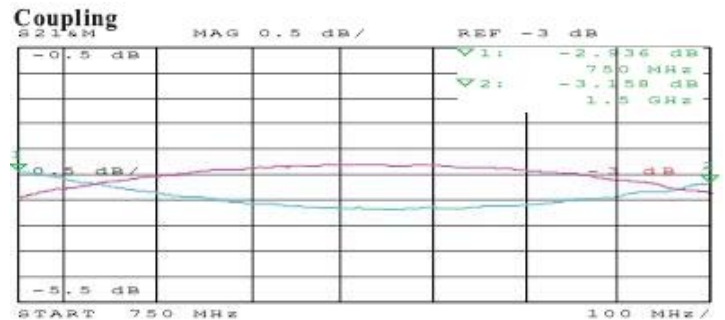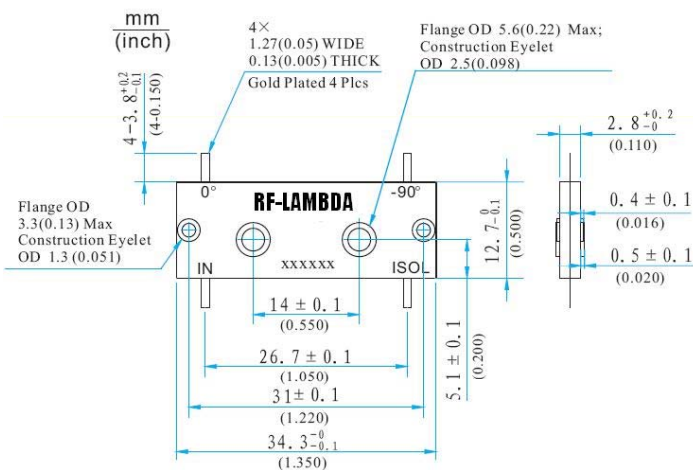

Surface Mount 120W 0.75G-1.5GHz 90° Hybrid Coupler