





RFLI-601					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-601-1	7.0~12	500	0.3	25	1.15
RFLI-601-2		1000	0.4	23	1.20
RFLI-601-3	8.0~12	FULL	0.5	20	1.35
RFLI-601-4	12~18	500	0.3	25	1.20
RFLI-601-5		1000	0.4	23	1.25
RFLI-601-6		FULL	0.5	20	1.40
RFLI-601-7	8.0~18	FULL	1	16	1.50

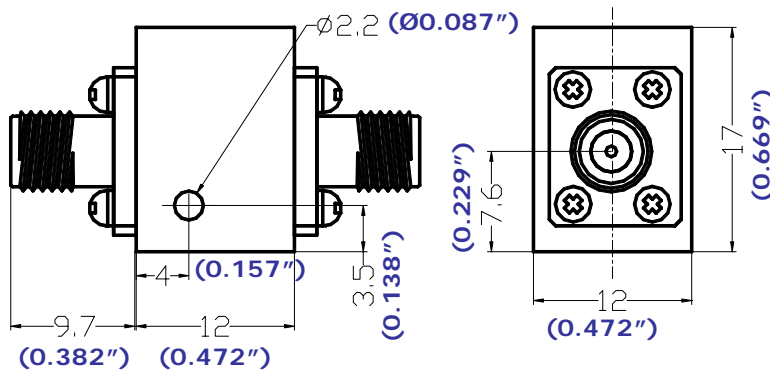

Connector Type: SMA
 Operating Temperature: -55~+85°C
 Forward Power: 10W (CW)
 Reverse Power: 2W (CW)
 Higher power unit available


RFLI-601A					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-601A-1	8.0~12	300	0.3	25	1.15
RFLI-601A-2		600	0.4	23	1.20
RFLI-601A-3		FULL	0.5	20	1.35
RFLI-601A-4	12~18	500	0.3	25	1.20
RFLI-601A-5		1000	0.4	23	1.25
RFLI-601A-6		FULL	0.6	20	1.40
RFLI-601A-7	8.0~18	FULL	1	16	1.50

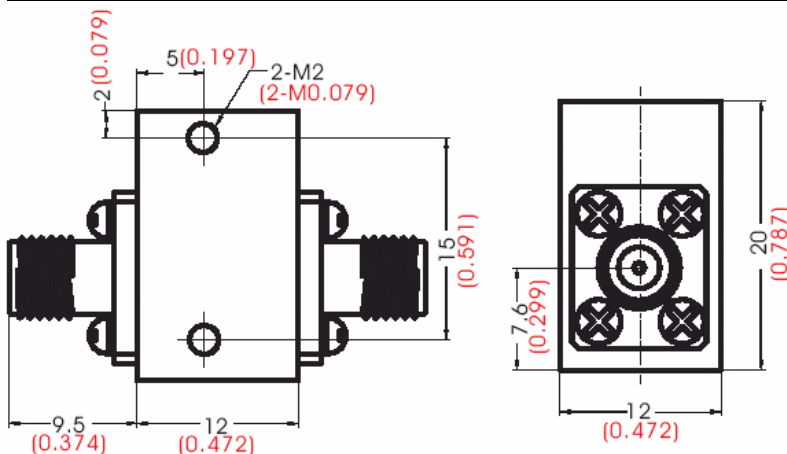

Connector Type: SMA
 Operating Temperature: -55~+85°C
 Forward Power: 10W (CW)
 Reverse Power: 2W (CW)
 Higher power unit available




RFLI-601B					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-601B-1	7.0~18	500	0.3	25	1.15
RFLI-601B-2		1000	0.4	23	1.20

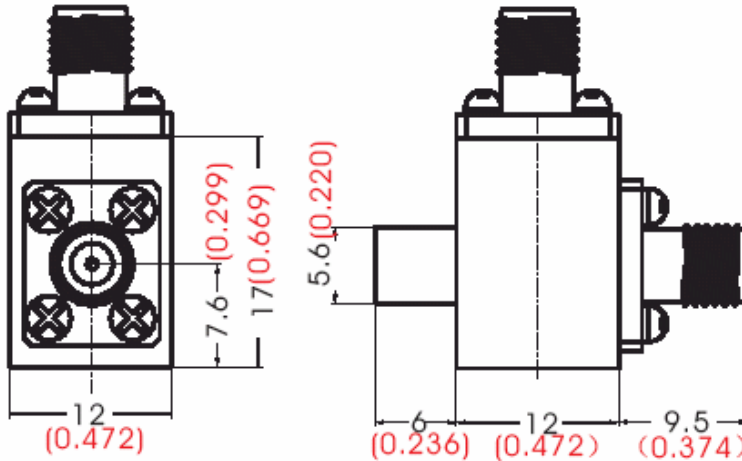

Connector Type: SMA
 Operating Temperature: -55~+85°C
 Forward Power: 10W (CW)
 Reverse Power: 2W (CW)
 Higher power unit available

RFLI-603					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLI-603-1	7~16	500	0.5	50	1.15
RFLI-603-2		1000	0.7	45	1.20
RFLI-603-3		2000	1	40	1.25

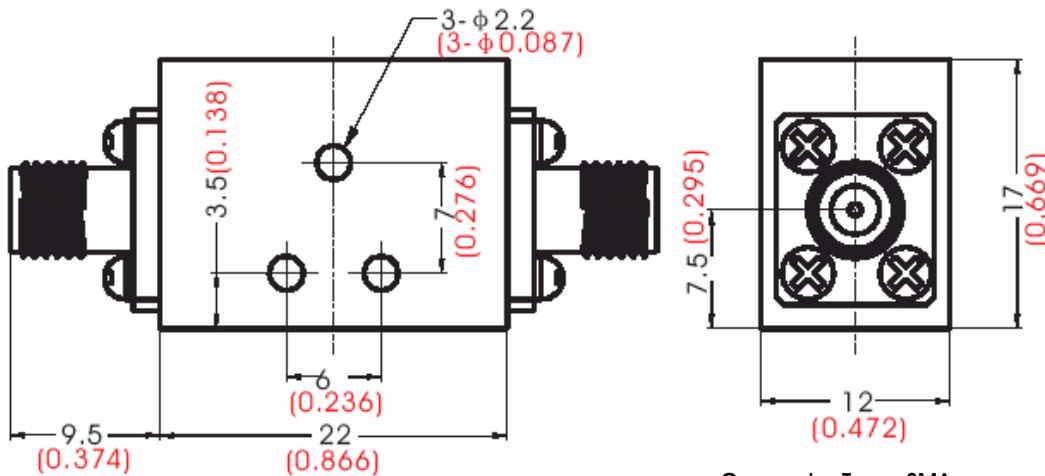

Connector Type: SMA
 Operating Temperature: -55~+85°C
 Forward Power: 10W (CW)
 Reverse Power: 2W (CW)
 Higher power unit available