




Ultra Wide Band 60- 512MHz Power Limiter

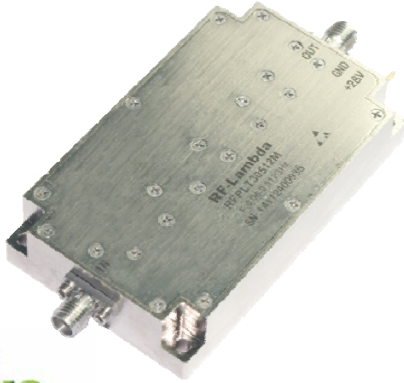

Features

- Ultra Wide Band
- Passive, High Isolation Limiter
- Low Insertion Loss and Good Return Loss
- High Power Handle Capability up to 10W
- Customization available upon request

Electrical Specifications, $T_A=25\text{ }^\circ\text{C}$

Parameters	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	60		512				GHz
CW Input Power			10				W
Peak Power($<10\% <2\mu\text{s}$)		-					W
Insertion Loss		0.8	1.2				dB
VSWR		1.4					
Flat Leakage			-20				dBm
Peak Power Leakage		-					dBm
Operating Temperature	-45 to +85						$^\circ\text{C}$
Weight	170						g
Input / Output Connector	SMA-Female/SMA-Female						
Material	Aluminum						
Finishing	Nickel Plating						


Environment specifications

Operational Temperature ($^\circ\text{C}$)	-45 to +85
Storage Temperature ($^\circ\text{C}$)	-55 to +125
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msc half sin wave,3 axis both directions




Typical Performance Plots


LOSS Temperature +25°C

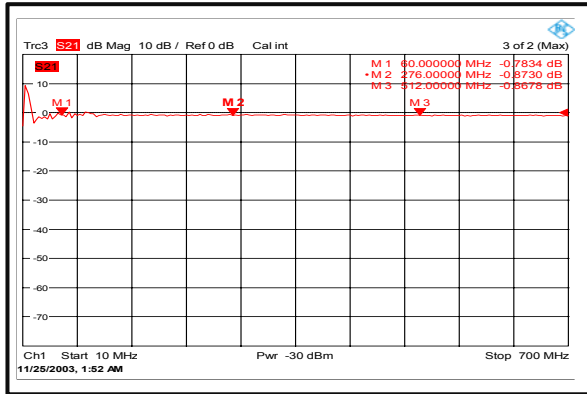


VSWR Temperature +25°C

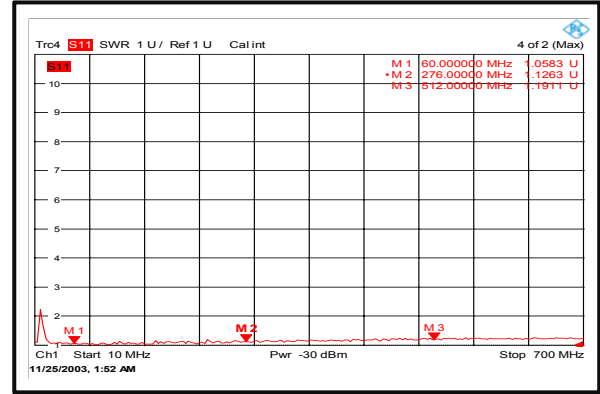


LOSS Temperature -30°C

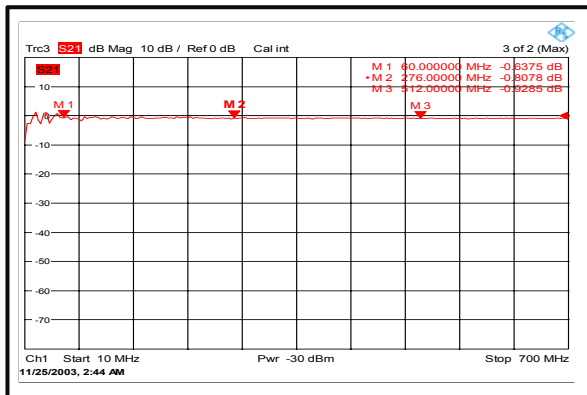


VSWR Temperature -30°C

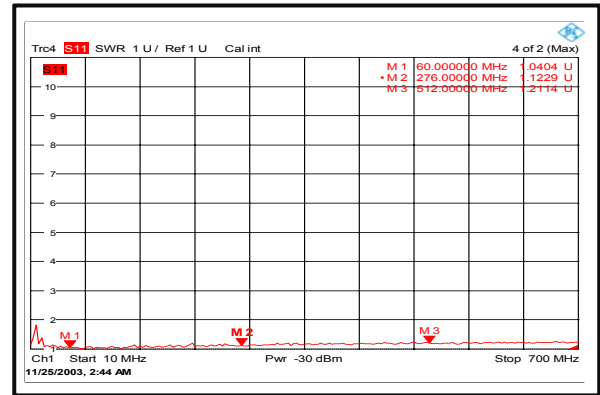

LOSS Temperature +55°C

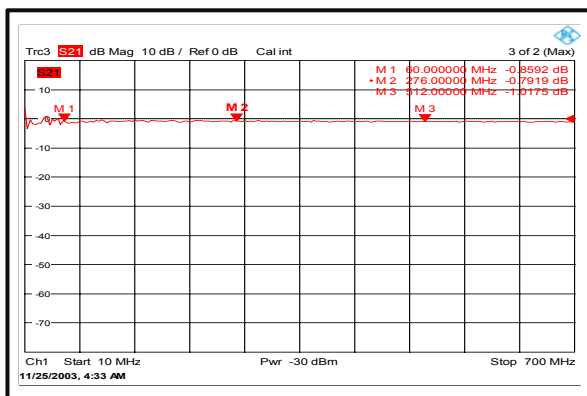

VSWR Temperature +55°C

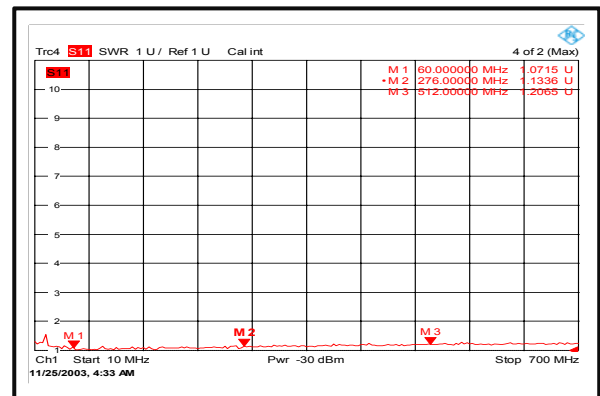


Ultra Wide Band 60-512MHz Power Limiter



Outline Drawing:

All Dimensions in mm (inches)

Tolerance ± 0.1 (0.0039)

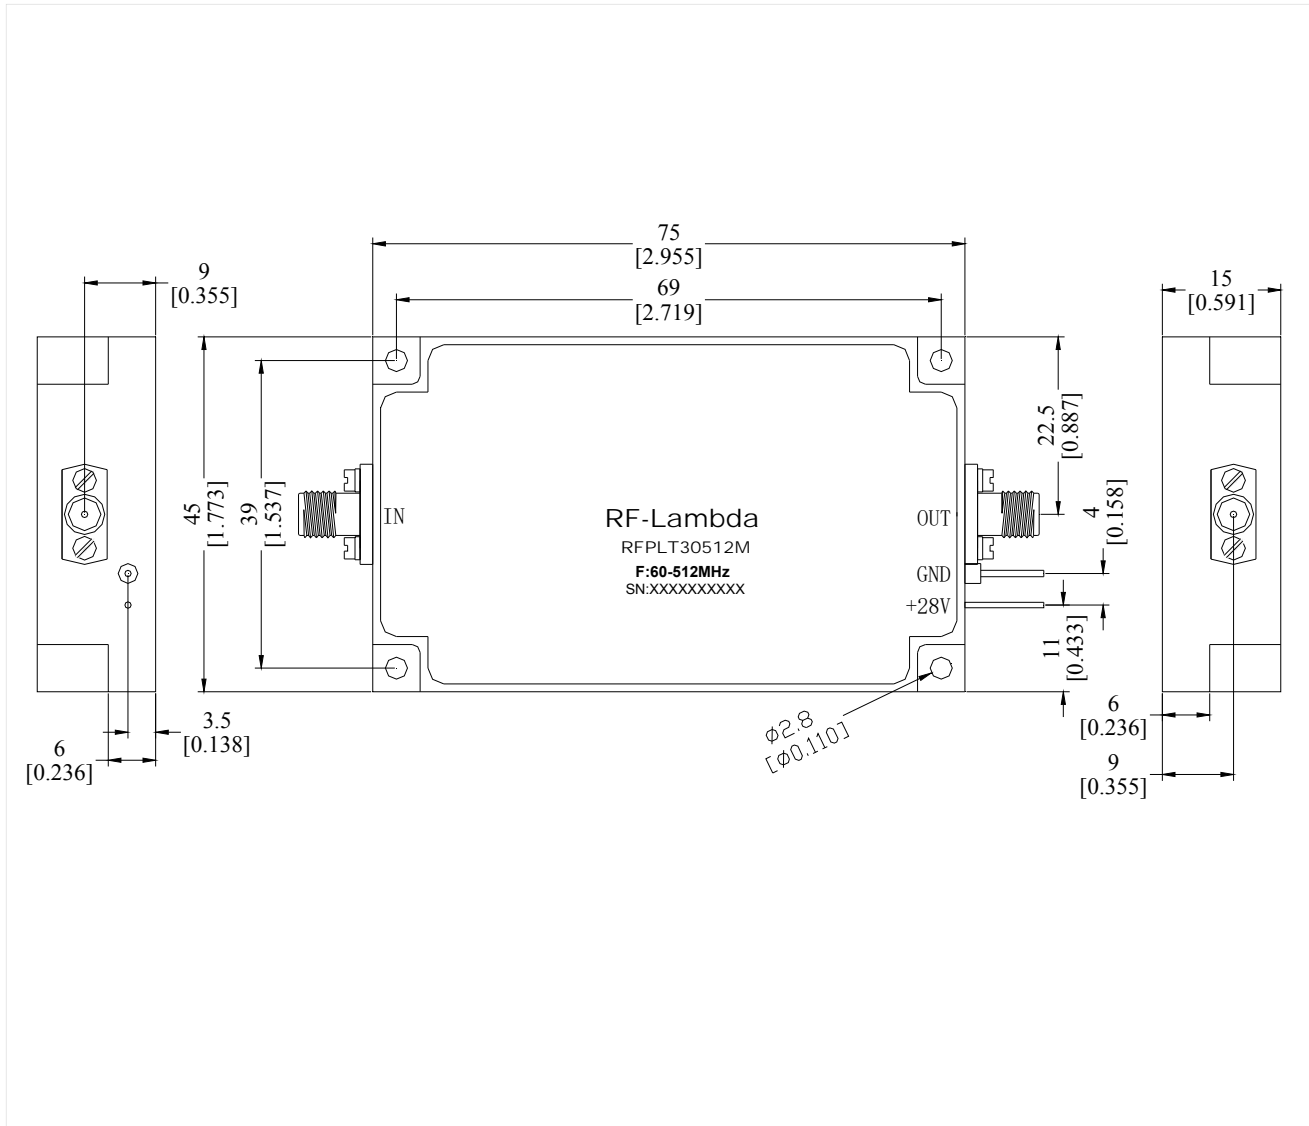

Ultra Wide Band 60-512MHz Power Limiter

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

