



RF-LAMBDA


150W-500W Termination



150W Termination		
PN	Frequency	VSWR
RFST150G01	DC-1GHz	1.20:1
RFST150G04	DC-4GHz	1.25:1

Average Power: 150W


Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 2.36"x3.15"x8.27" (60×80×210 mm)
Weight: 3.96lb. (1.8 Kg)
Operation Temp: -40°C~+85°C

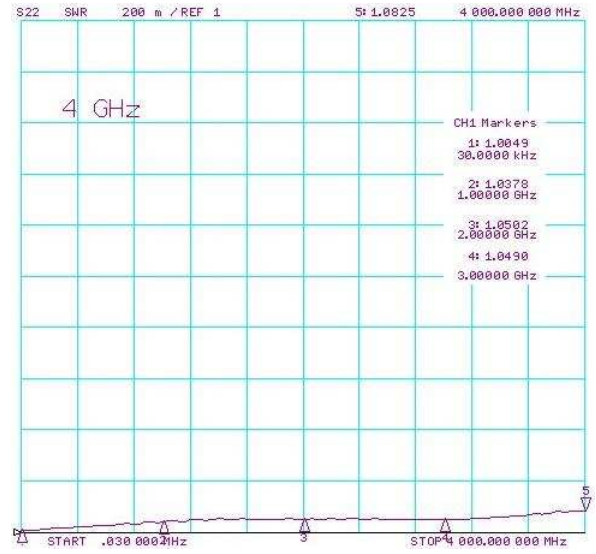

200W Termination		
PN	Frequency	VSWR
RFST200G02	DC-2GHz	1.20:1
RFST200G04	DC-4GHz	1.25:1

Average Power: 200W


Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 2.36"x3.93"x9.84" (60×100×250 mm)
Weight: 6.16lb. (2.8kg)
Operation Temp: -40°C~+85°C

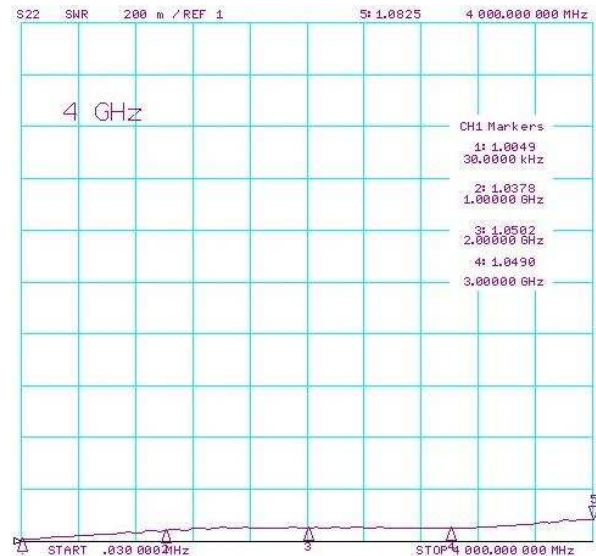

250W Termination		
PN	Frequency	VSWR
RFST250G02	DC-2GHz	1.30:1
RFST250G04	DC-4GHz	1.30:1

Average Power: 250W

Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 2.36"x3.86"x9.84" (60×98×250 mm)
Weight: 6.16lb. (2.80kg)
Operation Temp: -40°C~+85°C

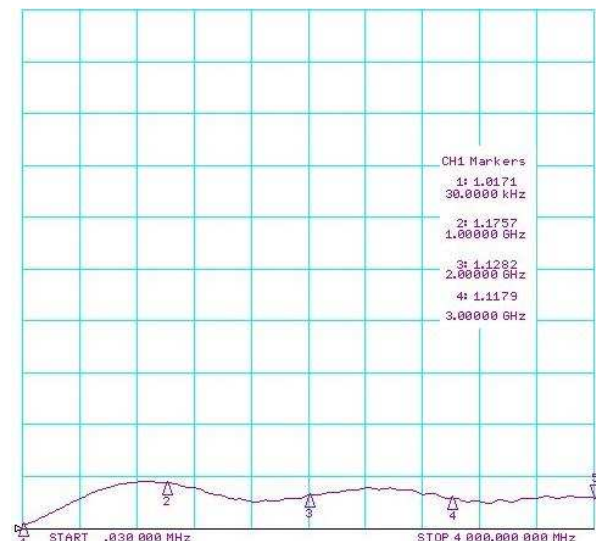

DC-4GHz 150W-500W Coaxial Termination



RF-LAMBDA

150W-500W Termination


DC-4GHz 150W-500W Coaxial Termination



Average Power: 300W

Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 2.36"x3.94"x11.81" (60 x 100 x 300 mm)
 5.12"x1.57"x13.38" (130 x 40 x 340 mm)
Weight: 7.7lb. (3.5kg) or 15.84lb. (7.2kg)
Operation Temp: -40°C~+85°C


300W Termination		
PN	Frequency	VSWR
RFST300G02	DC-2GHz	120:1
RFST300G04	DC-4GHz	140:1

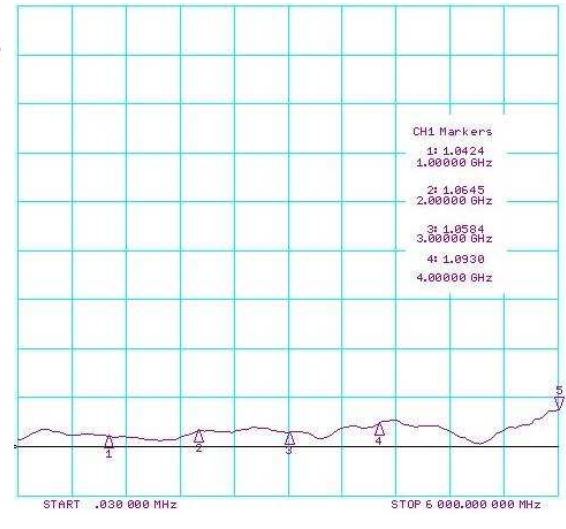

Average Power: 400W

Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 5.12"x5.51"x13.39" (130 x 140 x 340 mm)
Weight: 15.9lb. (7.2Kg)
Operation Temp: -40°C~+85°C

400W Termination		
PN	Frequency	VSWR
RFST400G02	DC-2GHz	120:1
RFST400G04	DC-4GHz	140:1

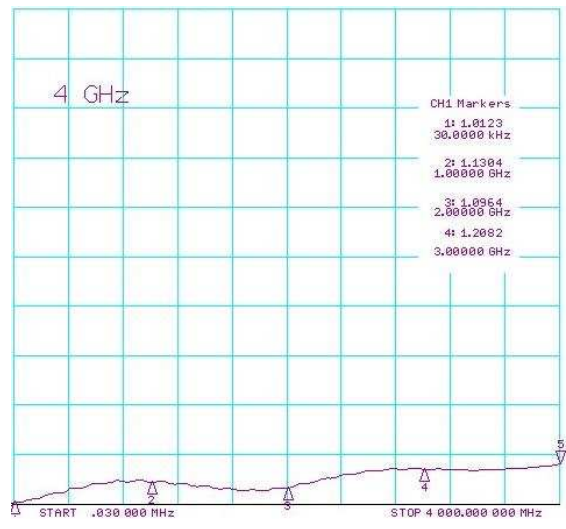

Average Power: 500W

Peak Power: 10KW (5µs Pulse)
Connector: N, 7/16
Dimension: 5.12"x5.51"x16.53" (130 x 140 x 420mm)
Weight: 20.9lb. (9.5 Kg)
Operation Temp: -40°C~+85°C

500W Termination		
PN	Frequency	VSWR
RFST500G02	DC-2GHz	125:1
RFST500G04	DC-4GHz	150:1

