



RF-LAMBDA


2W-25W Termination



Average Power: 2W

Peak Power: 0.5KW (5µs Pulse)
Connector: SMA, N, TNC, BNC
Dimension: Ø 0.79" x 2.09"
 Ø 20mm x 53mm
Weight: 0.11lb. Or 50g
Operation Temp: -40°C~+85°C


2W Termination		
PN	Frequency	VSWR
RFST2G04	DC-4GHz	1.20:1
RFST2G08	DC-8GHz	1.25:1
RFST2G12	DC-12.4GHz	1.30:1
RFST2G18	DC-18GHz	1.25:1

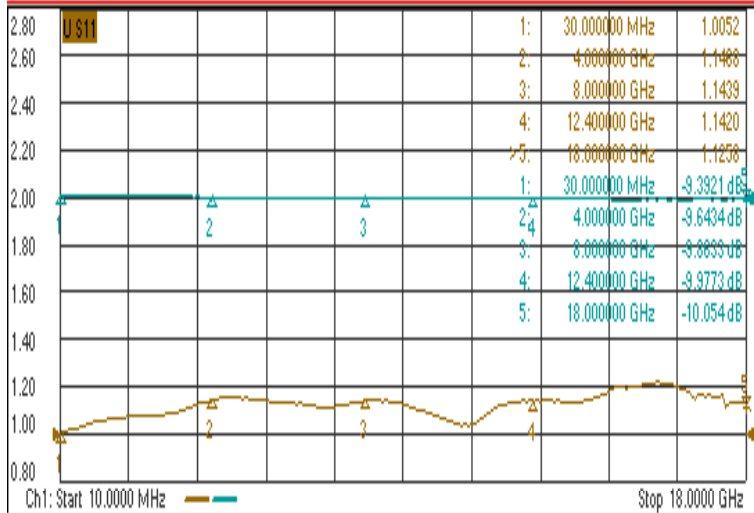

Average Power: 5W

Peak Power: 0.5KW (5µs Pulse)
Connector: N
Dimension: Ø 0.79" x 2.09"
 Ø 20mm x 53mm
Weight: 0.11lb. Or 50g
Operation Temp: -40°C~+85°C

5W Termination		
PN	Frequency	VSWR
RFST5G04	DC-4GHz	1.20:1
RFST5G08	DC-8GHz	1.25:1
RFST5G12	DC-12.4GHz	1.30:1
RFST5G18	DC-18GHz	1.35:1

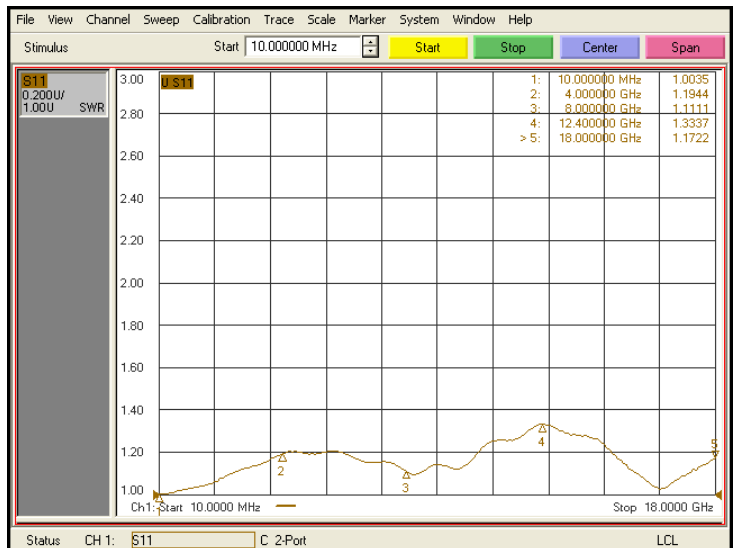


DC-18GHz 2W-25W Coaxial Termination



Average Power: 15W

Peak Power: 1.0KW (5µs Pulse)
Connector: SMA, N, TNC, BNC
Dimension: Ø 1.50" x 1.73"
 Ø 38mm x 44mm
Weight: 0.22lb. Or 100g
Operation Temp: -40°C~+85°C

15W Termination		
PN	Frequency	VSWR
RFST15G04	DC-4GHz	1.20:1

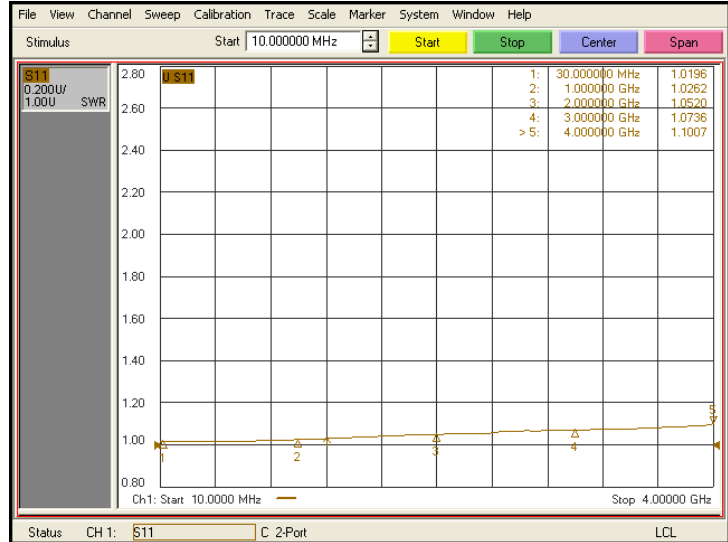

Average Power: 25W

Peak Power: 1.0KW (5µs Pulse)
Connector: SMA, N, TNC, 7/16
Dimension: Ø 1.50" x 2.36" (Ø 38mm x 60mm)
 Ø 1.73" x 3.54" (Ø 44mm x 90mm)
 Ø 2.28" x 3.54" (Ø 58mm x 90mm)
Weight: 0.24lb. Or 110g
 0.46lb. Or 210g
 0.64lb. Or 290g
Operation Temp: -40°C~+85°C

25W Termination		
PN	Frequency	VSWR
RFST25G04	DC-4GHz	1.20:1
RFST25G08	DC-8GHz	1.25:1
RFST25G12	DC-12.4GHz	1.30:1
RFST25G18	DC-18GHz	1.35:1

