

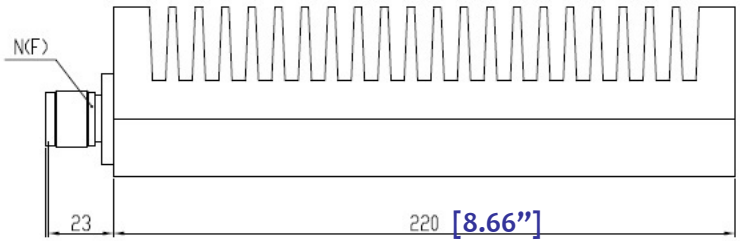
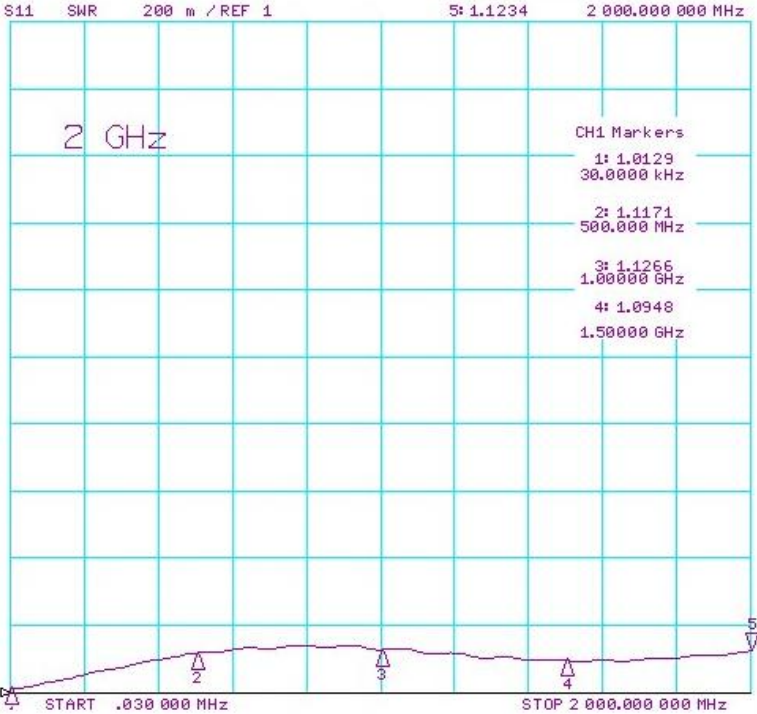


HIGH POWER TERMINATION --- RFST250G04

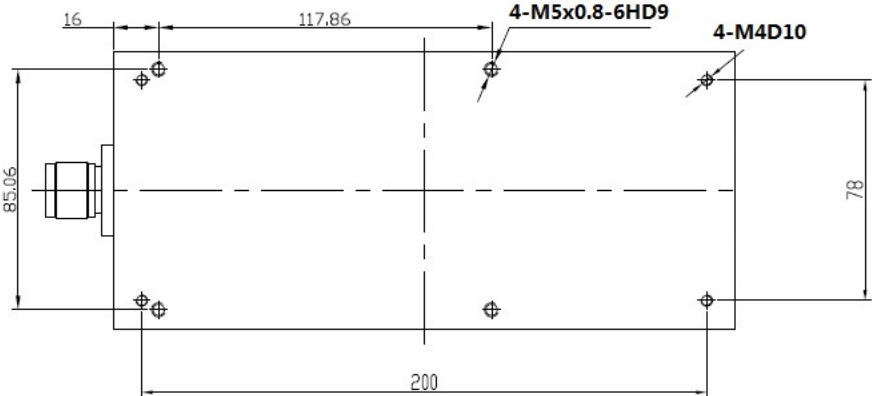

2.0 Environment specifications		
2.1	Operation Temp.	-40°C--+85°C
2.2	Storage Temp.	-55°C--+125°C
2.3	Altitude	41500 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

1.0 Mechanical Specifications		
1.1	Connector	N, 7/16
1.2	Size	250X 98 X 60mm 9.84" X 3.86" X 2.36"
1.3	External Finish	Body painted black epoxy enamel

3.0 Electrical Specifications				
PN	Frequency (GHz)	VSWR (max.)	Power (CW)	Peak Power (KW)
RFST250G04	DC-4GHz	1.20	250	10KW 5µs 0.5%

PAGE 1 OF 1		DATE	Sep 2 nd 1506
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	RFPC
		RF-LAMBDA	RFPC
RFST250G04 HIGH POWER TERMINATION		CAD MODEL REVISION	10
		ASSEMBLY REVISION	VS2
		ASSEMBLY NAME	RFLV807
www.rflambda.com		DRAWING NUMBER	005-A
RF-LAMBDA		SIZE	1 OF 1