



SMA DC-8GHz 5W TERMINATION--- RFST5Go8S

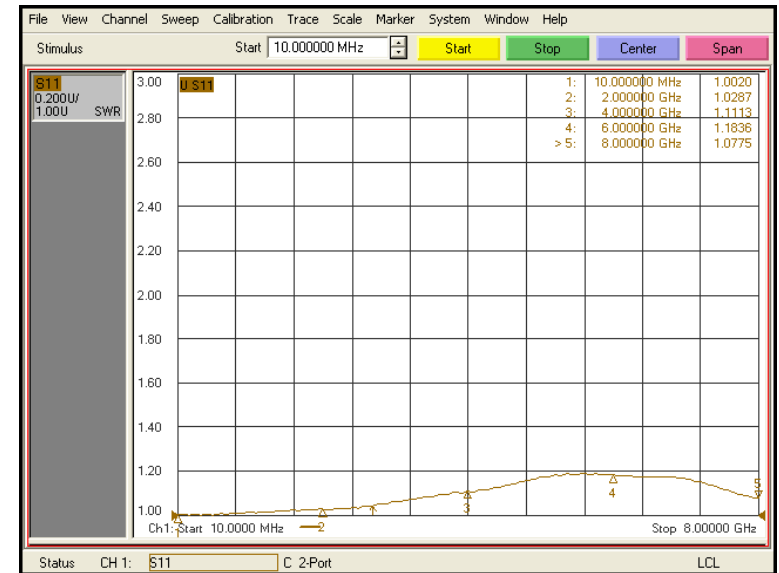


1.0 Mechanical Specifications	
1.1	Coaxial Connector SMA , (TNC, BNC special requirement)
1.2	External Body Finish Body painted black epoxy enamel
1.3	Weight 50g

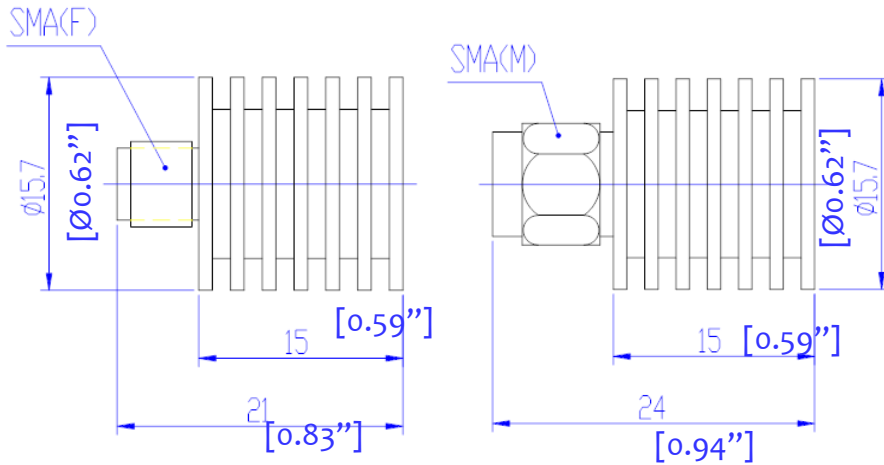

2.0 Environment specifications	
2.1	Operation Temp. -50°C~+120°C (case temp.)
2.2	Storage Temp. -55°C~+125°C
2.3	Vibration 10g rms (15 degree 2KHz)
2.4	Humidity 100% RH at 35c, 95%RH at 40°C
2.5	Shock 20G for 11msc

3.0 Electrical Specifications	
3.1	Frequency Range DC-8GHz
3.2	Average Power 5W 25°C 0.5W 125°C
3.3	VSWR 1.25:1
3.4	Peak Power 0.5 KW

PAGE 1 OF 1	DATE MAY 6 th 2000
<small> PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY. </small>	DESIGN RFPC
 RFST5Go8S Termination	RF-LAMBDA RFPC
	CAD MODEL REVISION 10
	ASSEMBLY REVISION V552
	ASSEMBLY NAME RFLV07
www.rflambda.com	DRAWING NUMBER D05-A
RF-LAMBDA	SIZE LT SHEETS 1 OF 1