



Wide Band Low Noise Amplifier 0.1GHz~4GHz



Features

- Gain: 34 dB Typical
- Noise Figure: 2.0dB Typical
- Output P1dB: +22dBm Typical
- Supply Voltage: +12V

Typical Applications

- Wireless Infrastructure
- Military & Aerospace
- Test Instrument

Electrical Specifications, TA = +25°C, Vcc = +12V

| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|---|--------------------------------|------|------|------|------|------|--------|
| Frequency Range | 0.1 | | 2 | 2 | | 4 | GHz |
| Gain | 31 | 34 | | 31 | 34 | | dB |
| Gain Flatness | | ±1.0 | ±1.5 | | ±1.0 | ±1.5 | dB |
| Gain Variation Over Temperature (-45°C~+85°C) | | ±0.5 | ±1.0 | | ±0.5 | ±1.0 | dB |
| Noise Figure | | 1.5 | 2.0 | | 2.0 | 3.0 | dB |
| Input VSWR | | 2.0 | 2.5 | | 1.8 | 2.5 | :1 |
| Output VSWR | | 1.5 | 2.2 | | 1.8 | 2.2 | :1 |
| Output 1dB Compression Point (P1dB) | 20 | 22 | | 20 | 22 | | dBm |
| Saturated Output Power (Psat) | | 23 | | | 23 | | dBm |
| Output Third Order Intercept (OIP3) | | 35 | | | 34 | | dBm |
| Supply Current (Vcc=+12V) | | 270 | 300 | | 270 | 300 | mA |
| Isolation S12 | | -55 | | | -60 | | dB |
| Weight | 1.06 | | | | | | Ounces |
| Impedance | 50 | | | | | | Ohms |
| Input / Output Connectors | SMA-Female | | | | | | |
| Finish | Gold Plated | | | | | | |
| Material | Aluminum | | | | | | |
| Package Sealing | Epoxy Sealed (Standard) | | | | | | |
| | Hermetically Sealed (Optional) | | | | | | |

Wide Band Low Noise Amplifier 0.1GHz~4GHz



Absolute Maximum Ratings

| | |
|-------------------|--------|
| Operating Voltage | +15V |
| RF Input Power | -10dBm |

Biasing Up Procedure

| | |
|---------------------|--------------------------|
| Step 1 | Connect Ground Pin |
| Step 2 | Connect input and output |
| Step 3 | Connect +12V biasing |
| Power OFF Procedure | |
| Step 1 | Turn off +12V biasing |
| Step 2 | Remove RF connection |
| Step 3 | Remove Ground. |

Environmental Specifications and Test Standards


| Parameter | Standard | Description |
|----------------------------------|---------------|---|
| Operational Temperature | MIL-STD-39016 | -45°C~+85°C |
| Storage Temperature | | -55°C~+125°C |
| Thermal Shock | | 1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles) |
| Random Vibration | | Acceleration Spectral Density 6 (m/s) Total 92.6 RMS |
| Electrical & Temperature Burn In | | Temperature +85°C for 72 Hours |
| Shock | | 1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction). |
| Altitude | | Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min) |
| Hermetically Sealed (Optional) | MIL-STD-883 | MIL-STD-883 (For Hermetically Sealed Units) |

Wide Band Low Noise Amplifier 0.1GHz~4GHz




Typical Performance Plots


Gain @+25°C

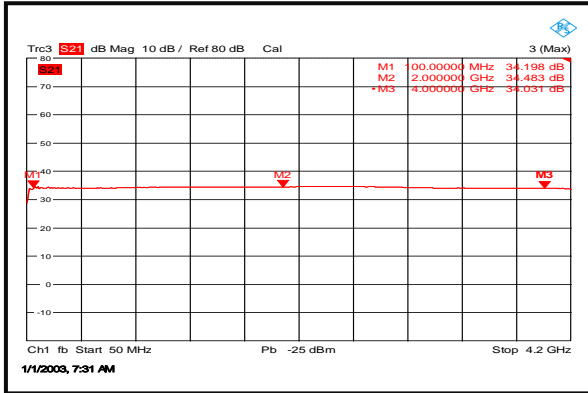


Input VSWR @+25°C

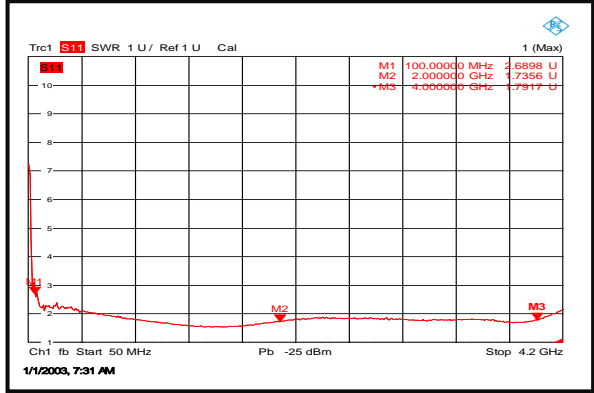


Output VSWR @+25°C

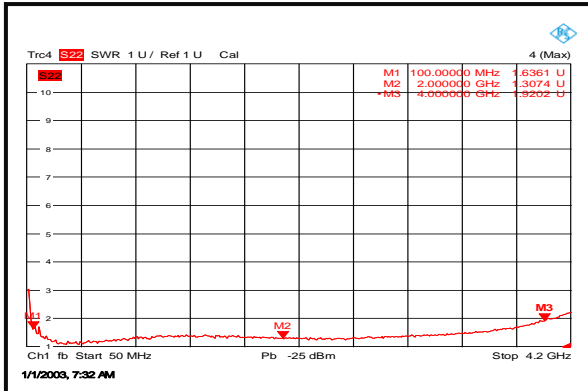


Isolation @+25°C

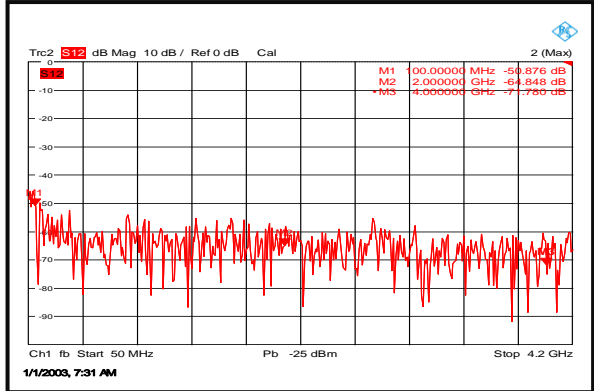


Gain @-45°C

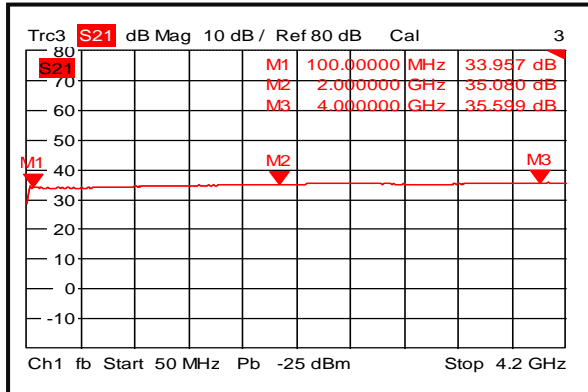


Input VSWR @-45°C

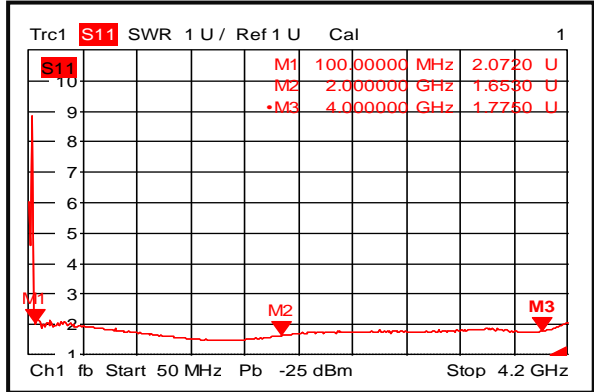

Output VSWR @-45°C

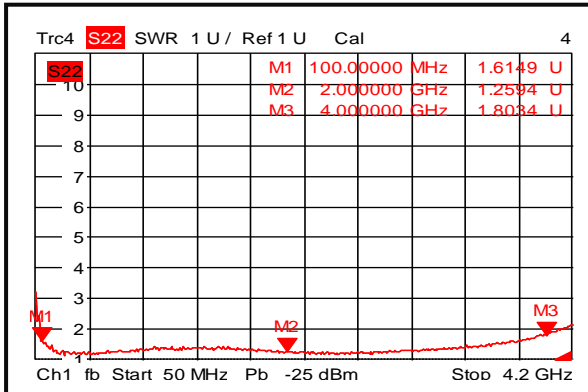


Isolation @-45°C

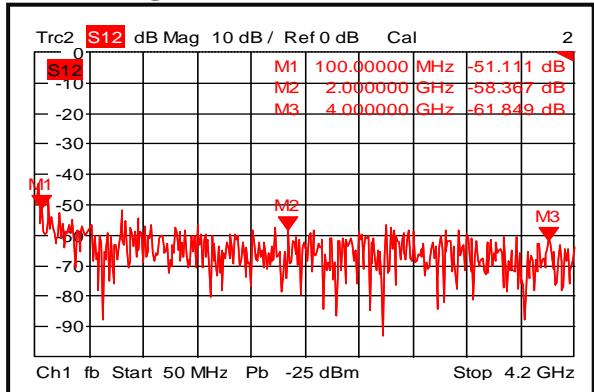


Wide Band Low Noise Amplifier 0.1GHz~4GHz




Gain @+85°C

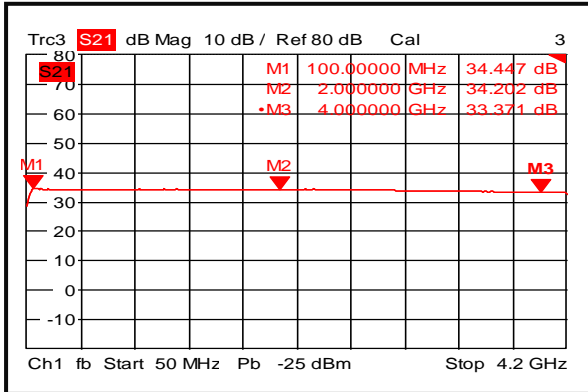


Input VSWR @+85°C

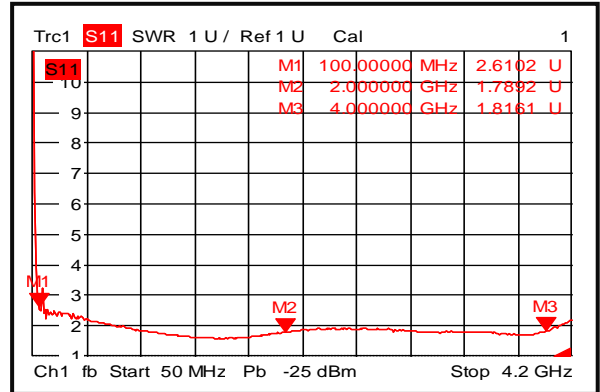


Output VSWR @+85°C

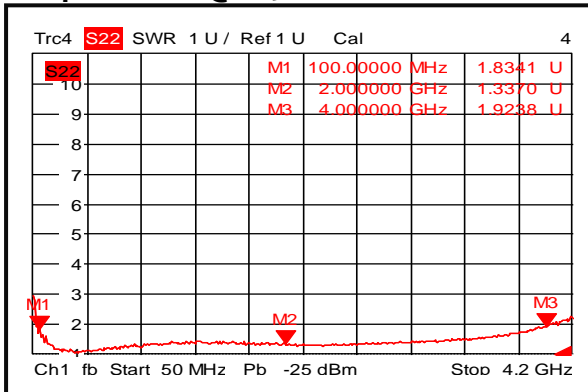


Isolation @+85°C

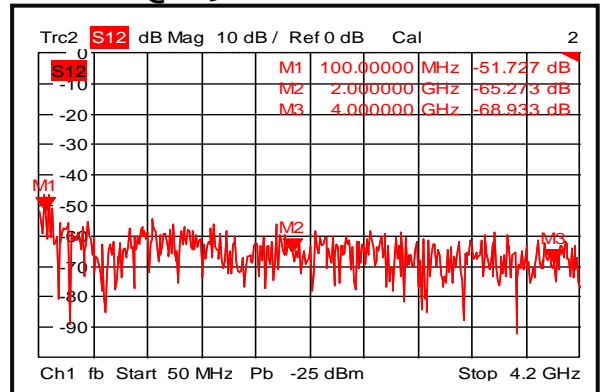


Gain vs. Output Power

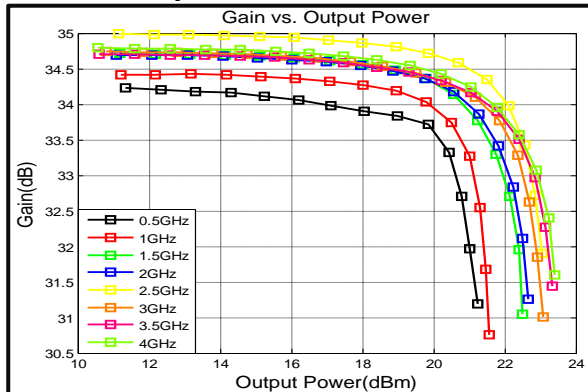


P1dB vs. Frequency

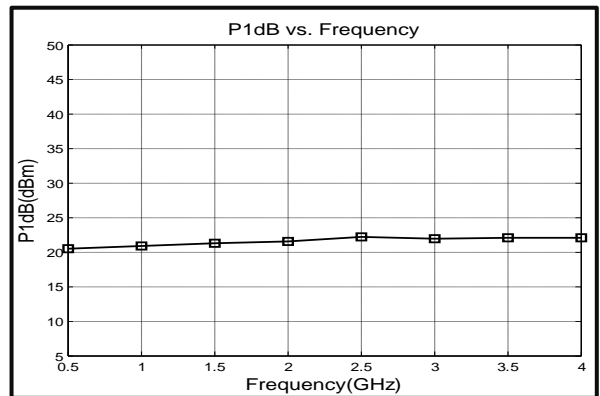

Output Third Order Intercept (OIP3)

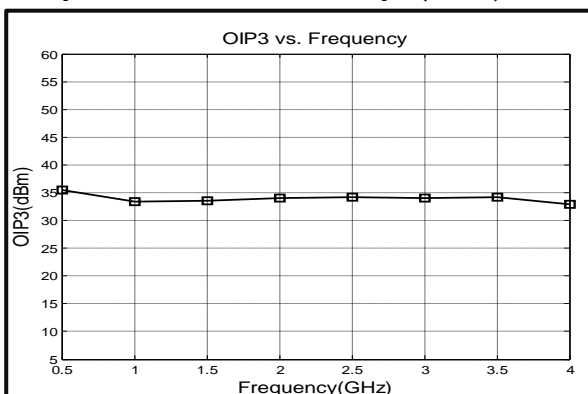


Noise Figure

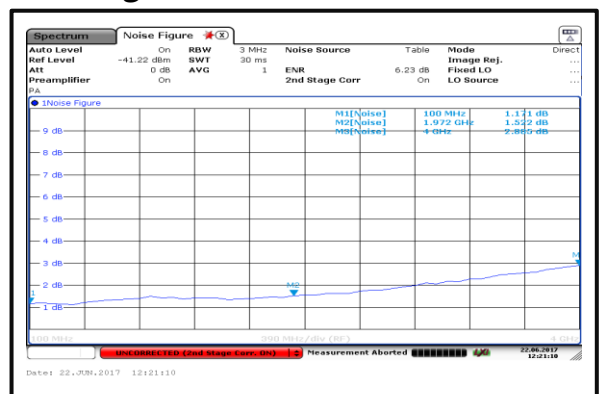


Wide Band Low Noise Amplifier 0.1GHz~4GHz




2nd Harmonic Wave Output Power

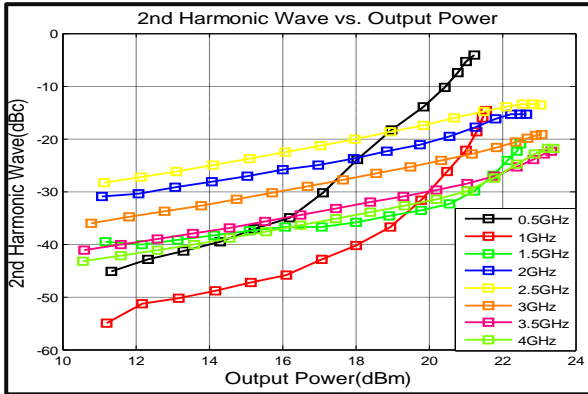

3rd Harmonic Wave Output Power

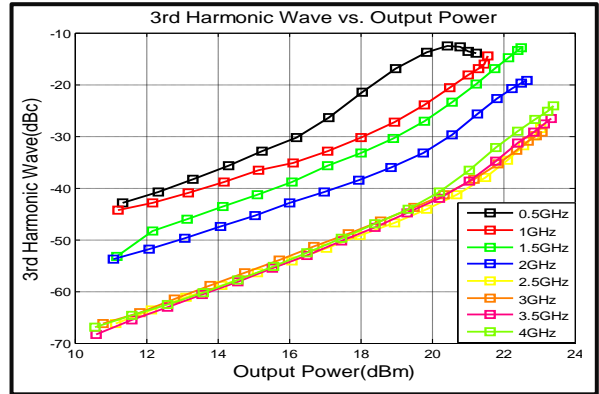

4th Harmonic Wave Output Power

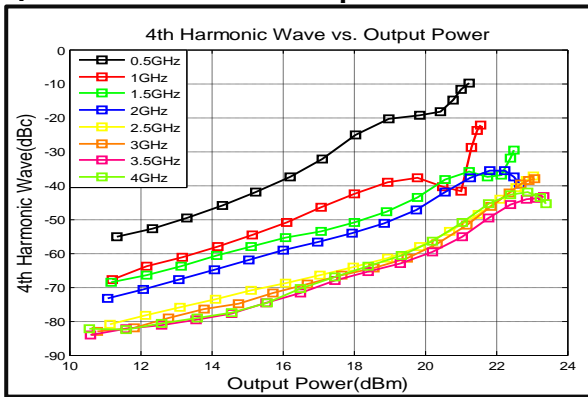


Wide Band Low Noise Amplifier 0.1GHz~4GHz



Outline Drawing:

All Dimensions in mm [inches]

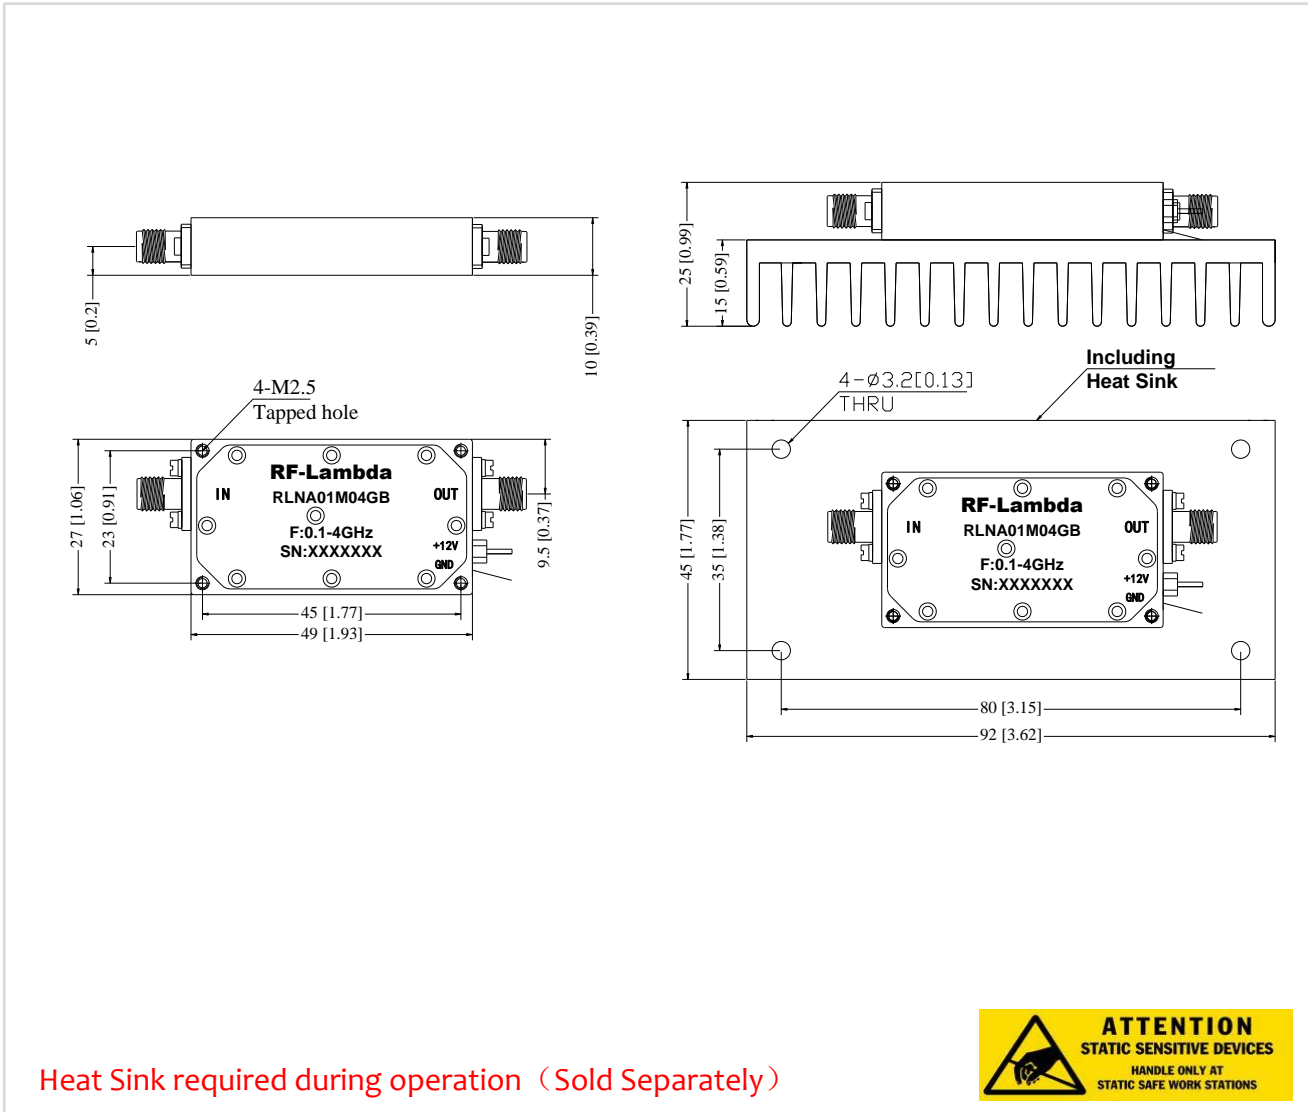

Wide Band Low Noise Amplifier 0.1GHz~4GHz

Ordering Information

| Part No | ECCN | Description |
|-------------|-------|------------------------------|
| RLNA01M04GB | EAR99 | 0.1-4GHz Low Noise Amplifier |

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.