



# RF-LAMBDA

The power beyond expectations

## RKT2G2K10

### MANUAL CONTROL STEP ATTENUATOR (DC-2GHZ 10DB RANGE)

#### Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- High power handle up to 10W CW upon request
- Custom Configurations Available Upon Request.






#### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G2K10	DC-2.0GHz	2	10dB	0.1dB	1.40	≤ 2.8	± 0.3 (single)

Connector: SMA / N type is available, weight: 250g

Temperature (Operational): -10°C~+50°C (Storage) -40°C~+70°C

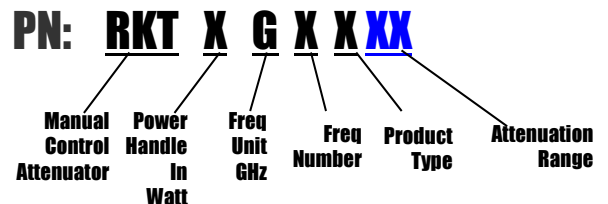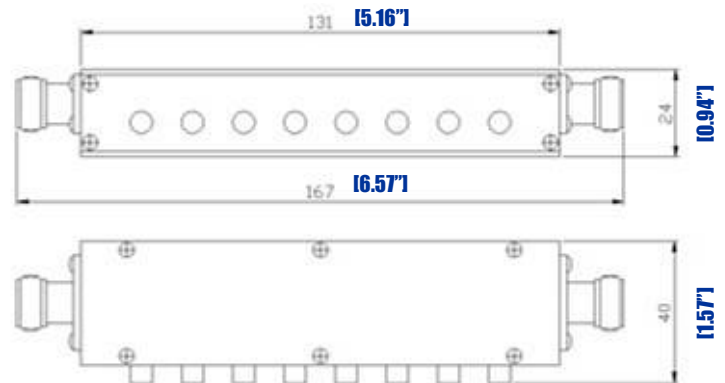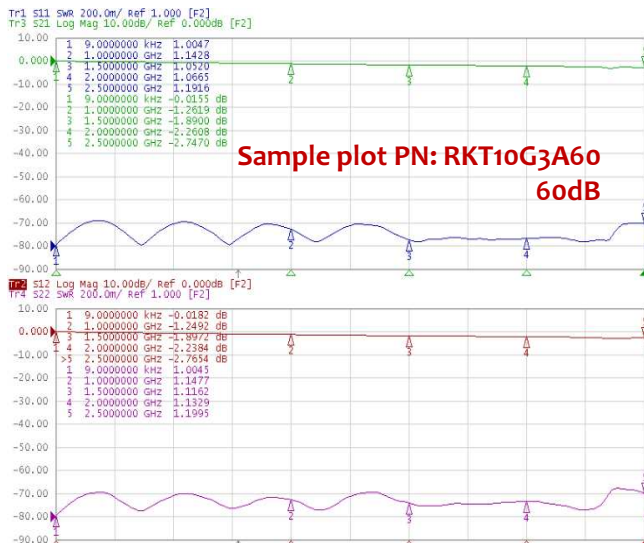

MANUAL CONTROL STEP ATTENUATOR (DC-2GHZ 10DB RANGE)




# RF-LAMBDA

The power beyond expectations

## RKT2G2K10

MANUAL CONTROL STEP ATTENUATOR (DC-2GHz 10DB RANGE)

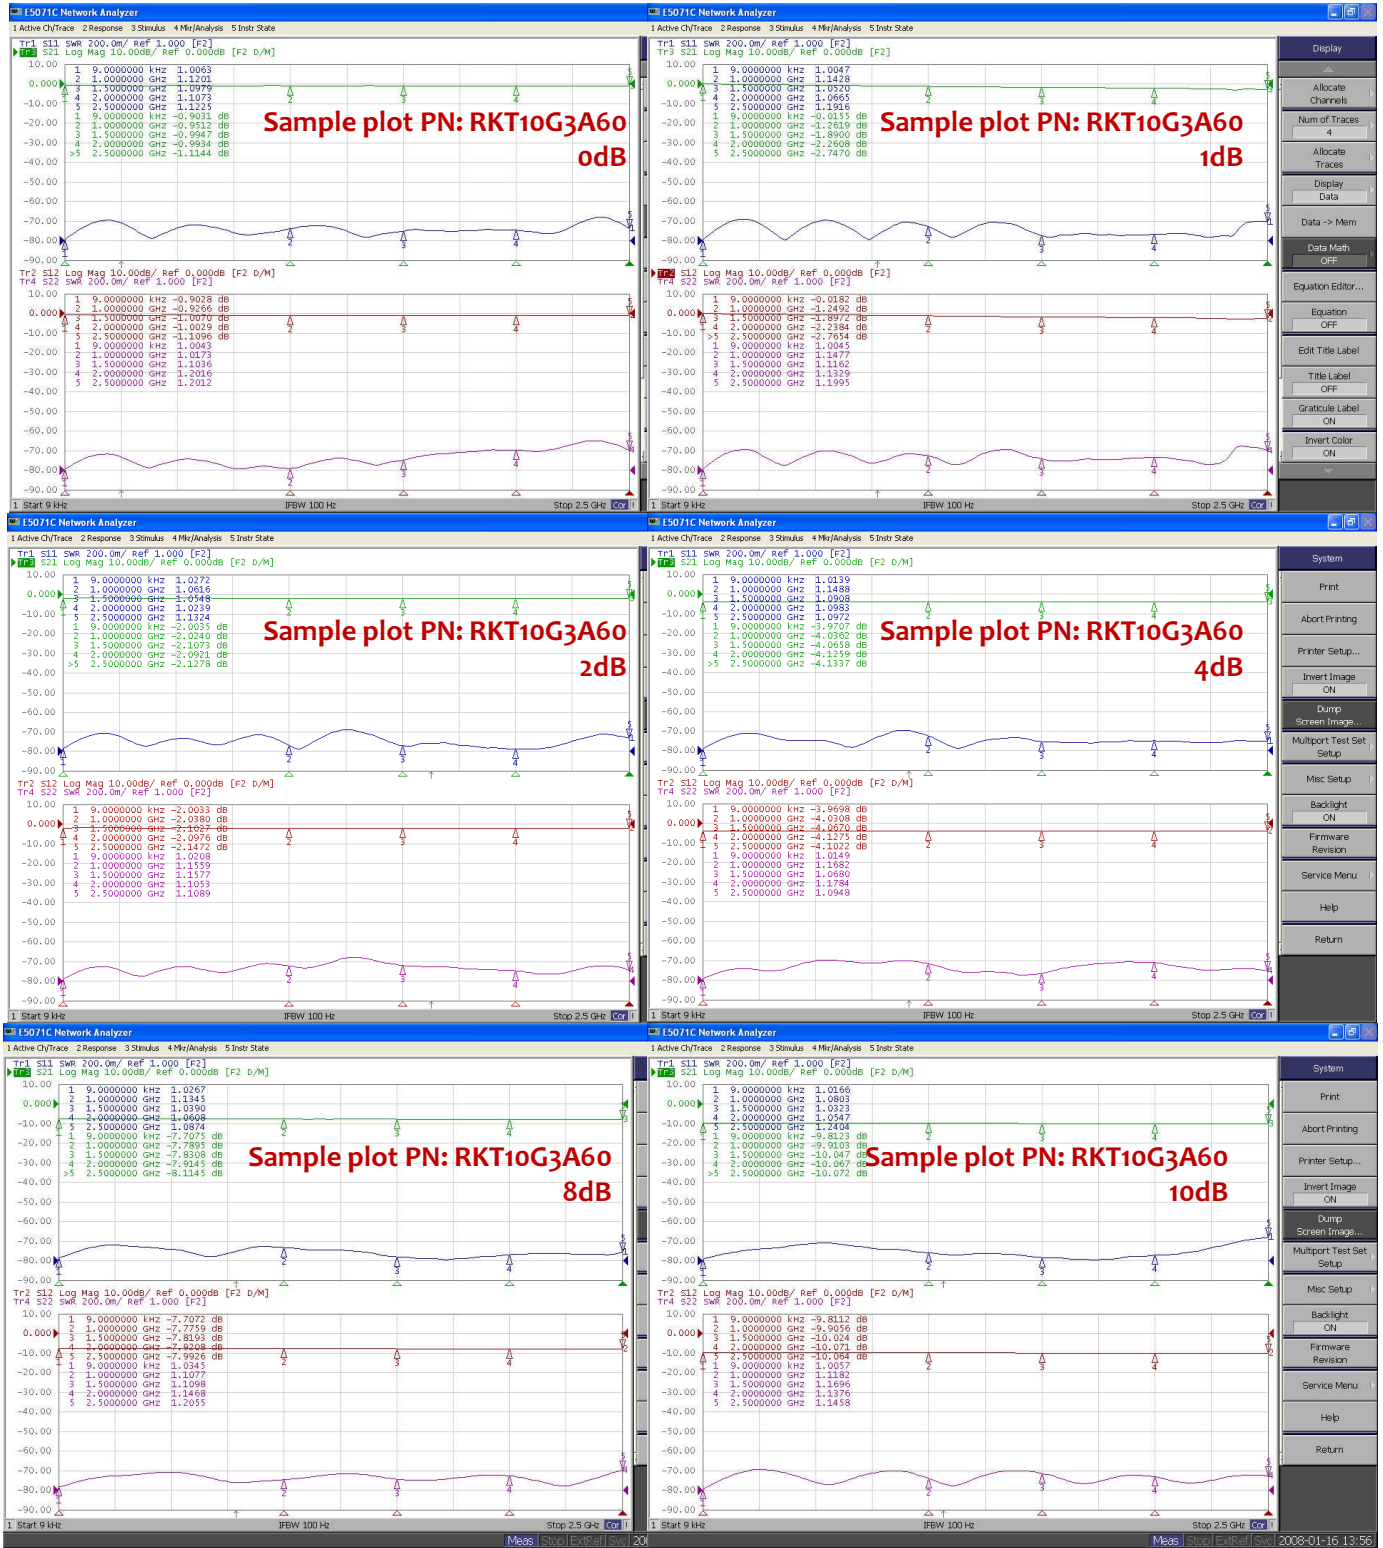



# RF-LAMBDA

The power beyond expectations

## RKT2G2K10

MANUAL CONTROL STEP ATTENUATOR (DC-2GHz 10DB RANGE)

