



# RF-LAMBDA

The power beyond expectations

## ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-06GHZ 60DB RANGE)

### Product description

- Very small package and broadband performance
- Adjustable during operation
- Excellent Repeatability low deviation
- Low Deviation from Nominal Value
- 50Ω impedance
- Higher power is available upon request
- Custom Configurations Available Upon Request.
- 2W CW average power
- Custom Configurations Available Upon Request.





### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency (GHz)	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G6A60	DC-6	2	60	10.0	1.6	≤1.0	± 0.5 (<50dB) ± 0.8 (≥50dB)

PN: **RKT 2 G 6 A 60**

Manual Control Attenuator    Power Handle In Watt    Freq Unit GHz    Freq Number    Product Type    Attenuation Range

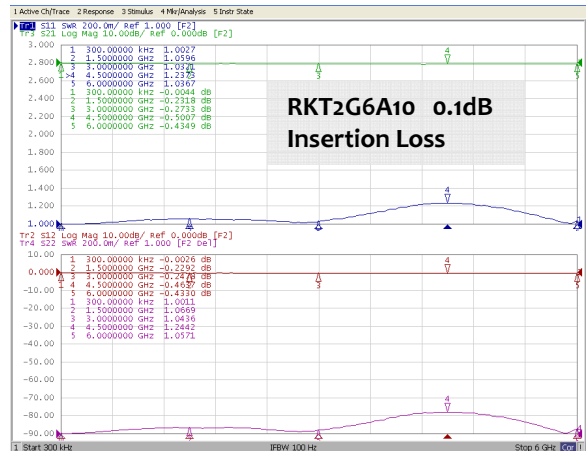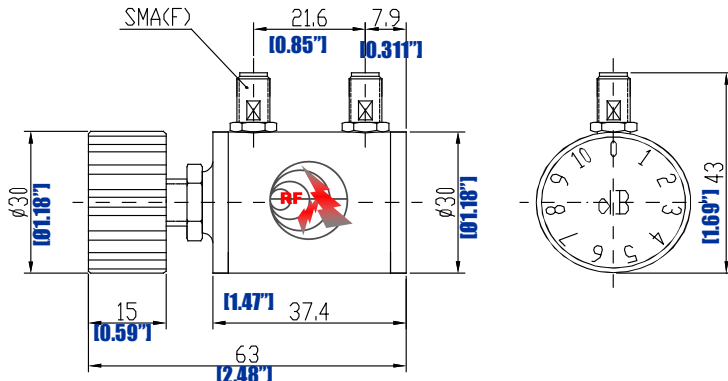

Connector: SMA type, weight: 250g







Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

MANUAL CONTROL ROTARY ATTENUATOR (DC-6GHZ 60DB RANGE)



# RF-LAMBDA

The power beyond expectations

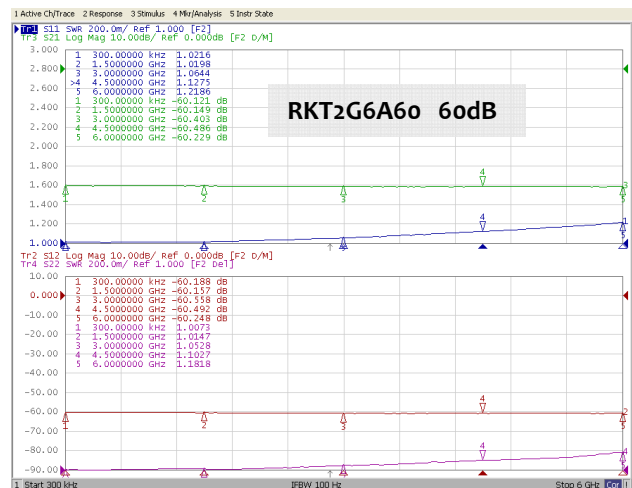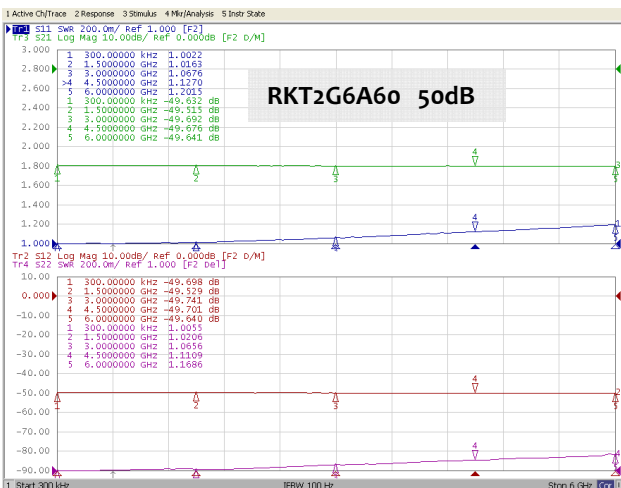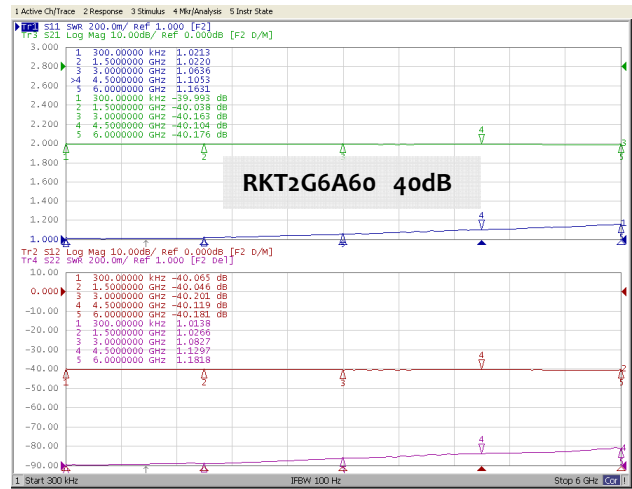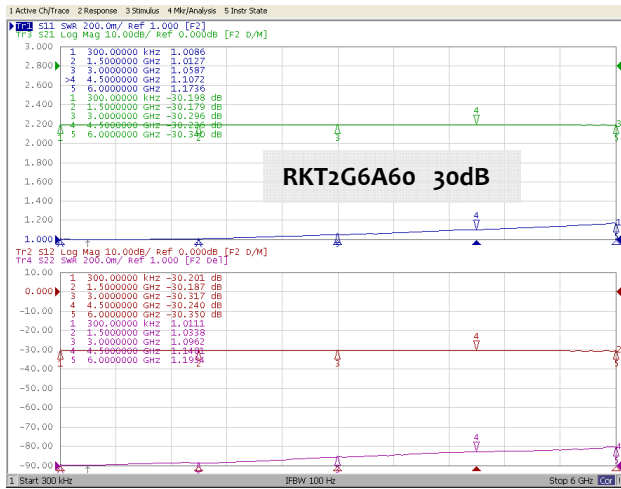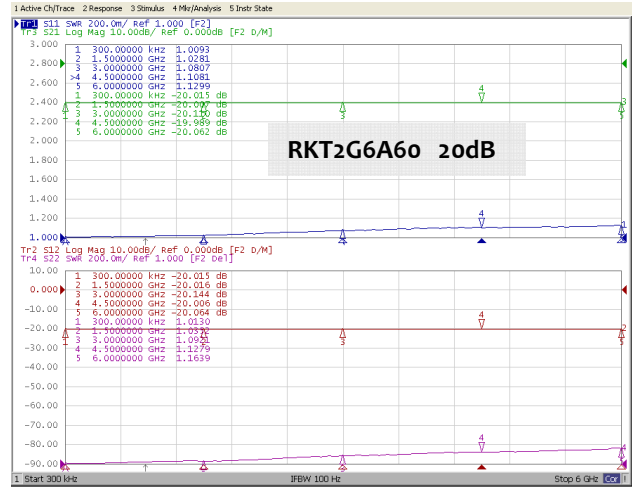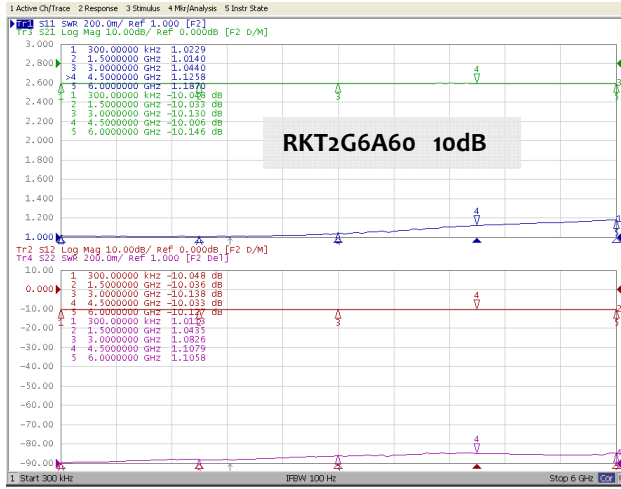

MANUAL CONTROL ROTARY ATTENUATOR (DC-6GHz 60DB RANGE)