





10MHz-200MHz 12-Way 75Ω Power Divider



Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- 10W forward power handling capability
- * 2W maximum input when work as combiner.

Frequency Range (MHz)	Insertion Loss (dB)		Isolation (dB)			Phase Unbalance (degree)			Amplitude Unbalance (dB)			
	L	U	L	M	U	L	M	U	L	M	U	
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax	
	f _L	f _U										
10-200	0.5	0.8	35	27	27	20	4	4	4	0.25	0.25	0.25

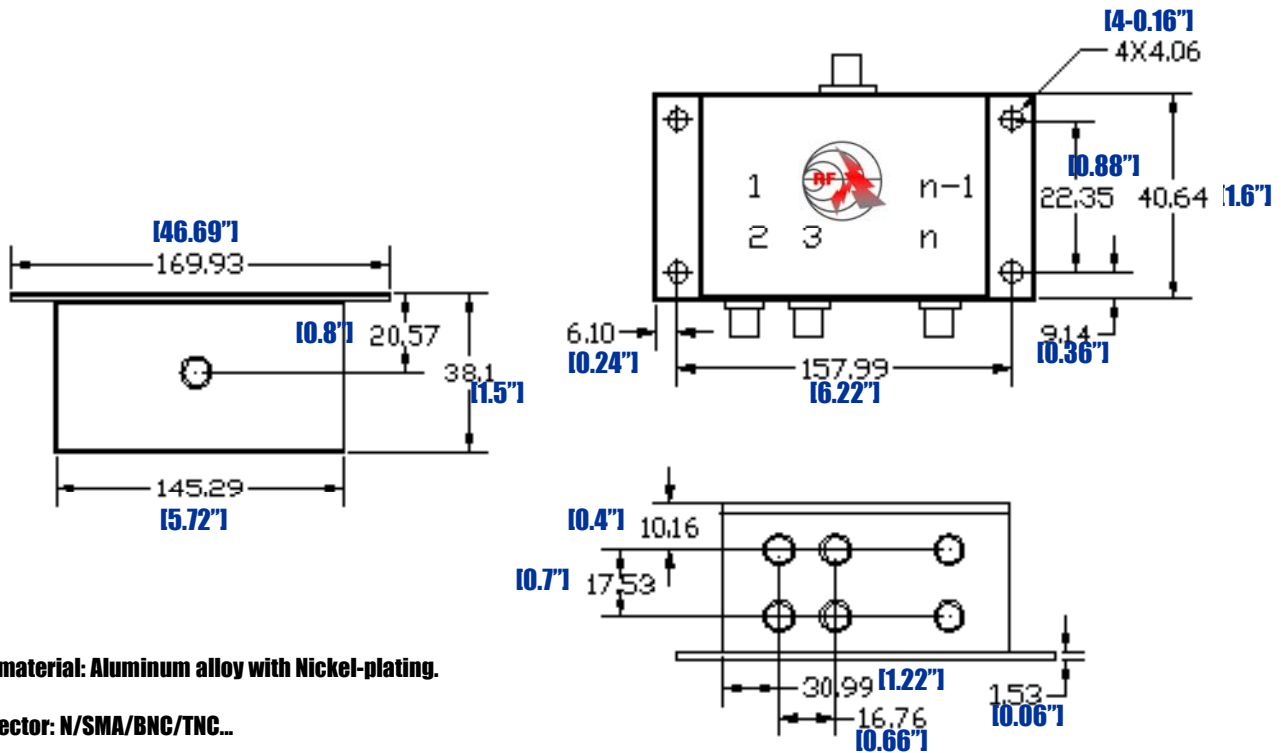

- Notes:
- Case material: Aluminum alloy with Nickel-plating.
 - Connector: N/SMA/BNC/TNC...
 - Temperature -40° C~+85° C

10MHz-200MHz 12-Way Power Divider