




HIGH POWER 5-Way POWER DIVIDER 1-300MHZ


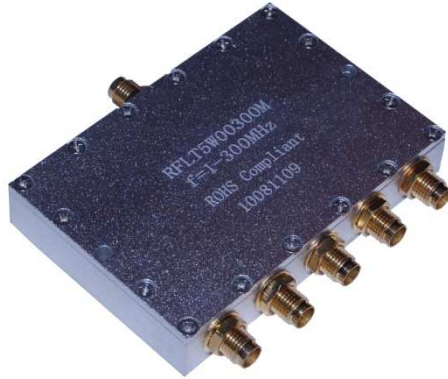


Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner *
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E -16400
- High power handling capability

RFLT5W00300M 5-Way Power Divider 1-300MHZ

Electrical Specifications						
Frequency Range (MHz)	Insertion Loss (dB. max)	Isolation (dB. min)	Phase Unbalance (°)	Amplitude Unbalance (dB)	VSWR	Working Temp. Range (° C)
1~300	1.8	20	9	1.2	1.50:1	-35~+80
Average Power (W)	Peak Power (KW)	Reverse Power (W)	Impedance (Ω)	Connector	Relative Humidity	Dimension unit
35(CW)	1	10W /port	50	SMA-F	0%~90%	mm [inch]

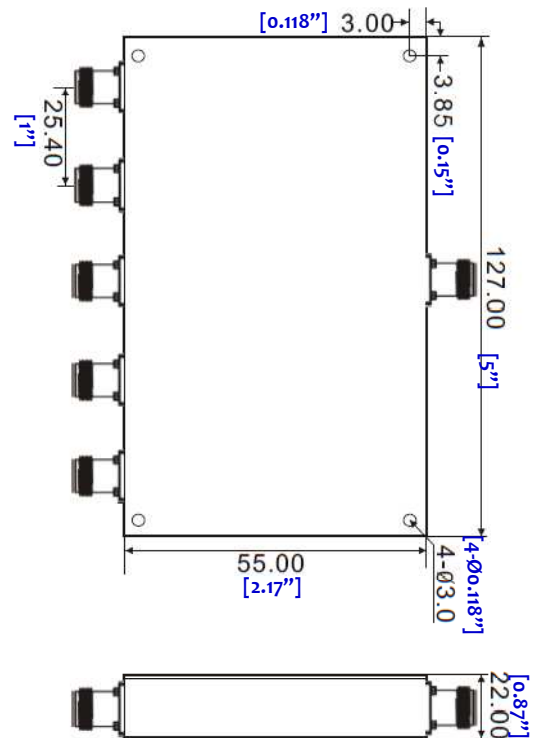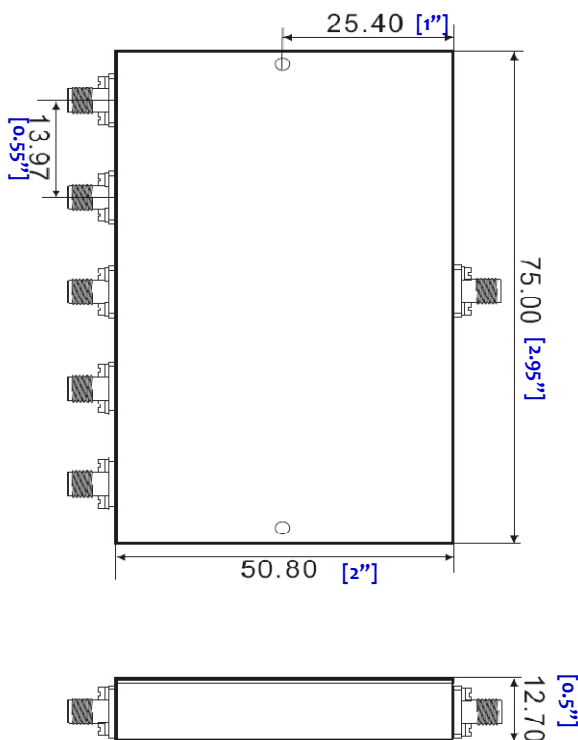



RF-LAMBDA

The power beyond expectations

RFLT5W00300M

RFLT5W00300M 5-Way Power Divider 1-300MHz

