



RF-LAMBDA

The power beyond expectations

RFLT6W08028



Wide Band Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *

Low Insertion loss and high isolation


Standard: MIL E-5400, MIL E-16400

High power handling capability

* 2W maximum input when work as combiner.

Electrical Specifications:

Center Frequency Range:	0.8GHz-2.5GHz
Insertion Loss:	0.8dB
Amplitude Unbalance:	± 0.5dB
Phase unbalance	± 5 degree
Isolation:	20dB
Input VSWR:	1.4
Output VSWR:	1.25
Temp. Range:	-10°C~+70°C
Forward Power Handling:	20W (CW)
Reverse Power Handling:	2W (CW)
Connector:	SMA-F
Finishing:	Gray Paint and Epoxy cover

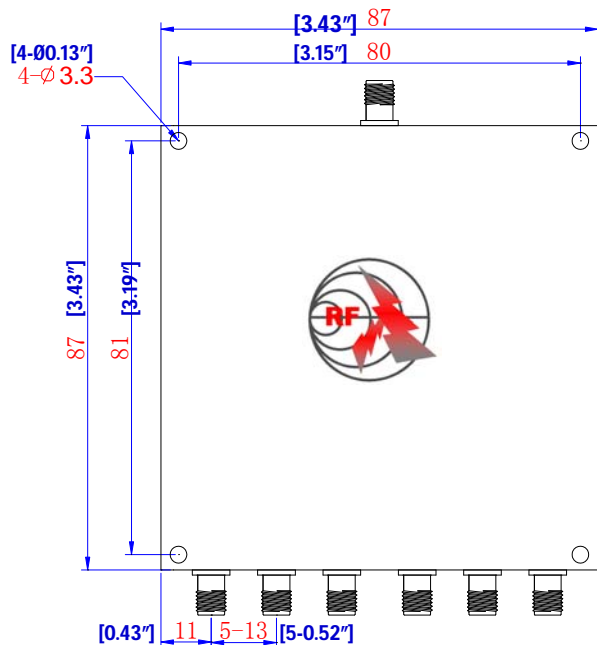

800MHz-2500MHz 6-Way Power Divider

