



890MHz-960MHz 6-Way 50Ω Power Divider



Wide Band Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *

Low Insertion loss and high isolation


Standard: MIL E-5400, MIL E-16400

10W forward power handling capability

* 2W maximum input when work as combiner.

890MHz-960MHz 6-Way Power Divider

Frequency Range (MHz) f _L f _H	Insertion Loss		Isolation			Phase Unbalance			Amplitude Unbalance		
	(dB)		(dB)			(degree)			(dB)		
	L	M	L	M	U	L	M	U	L	M	U
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax
890-960	0.8	0.8	20	20	20	2	2	2	0.2	0.2	0.2

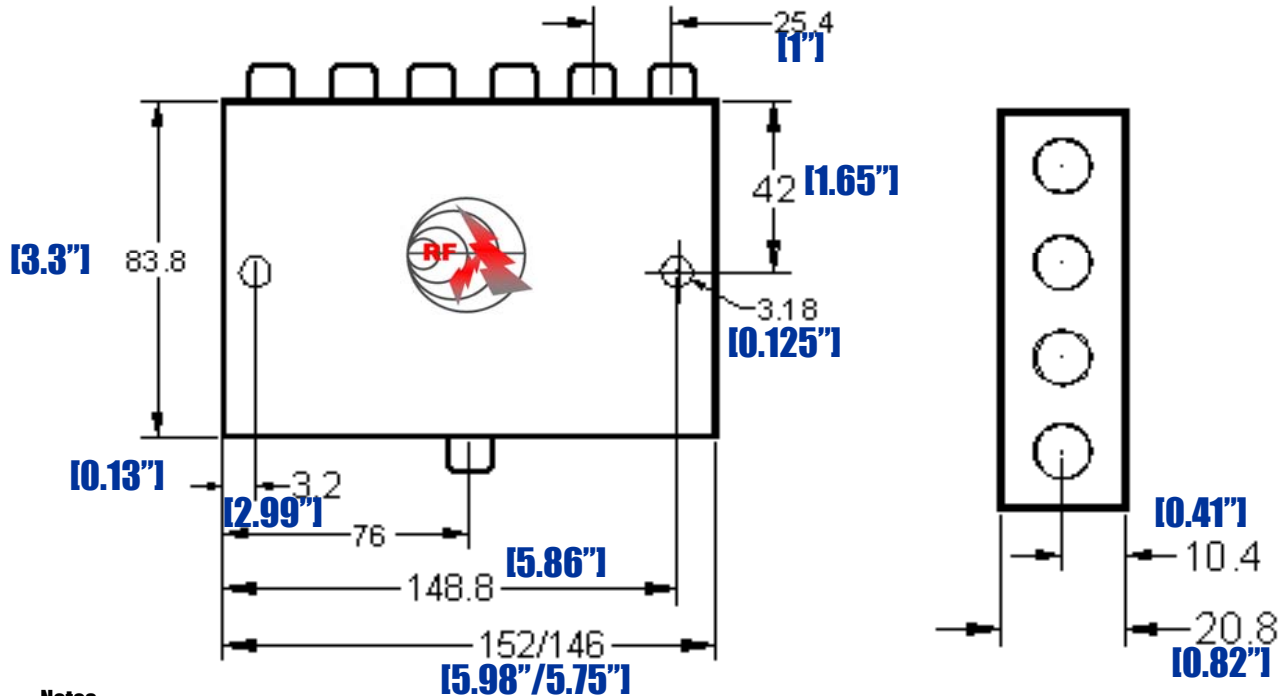

Notes:

1. Case material: Aluminum alloy with Nickel-plating.

2. Connector: N/SMA/BNC/TNC...

3. Temperature -40° C ~ +85° C