



1MHz-200MHz 8-Way 75Ω Power Divider



Wide Band Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner *

Low Insertion loss and high isolation


Standard: MIL E-5400, MIL E-16400

10W forward power handling capability

* 2W maximum input when work as combiner.

1MHz-200MHz 8-Way Power Divider

Frequency Range (MHz) f _l f _u	Insertion Loss		Isolation			Phase Unbalance			Amplitude Unbalance					
	(dB)		(dB)			(degree)			(dB)					
	L	M	L	M	U	L	M	U	L	M	U			
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax			
1-200	0.8	1.2	35	25	30	20	25	18	1	2.5	5.0	0.2	0.3	0.5

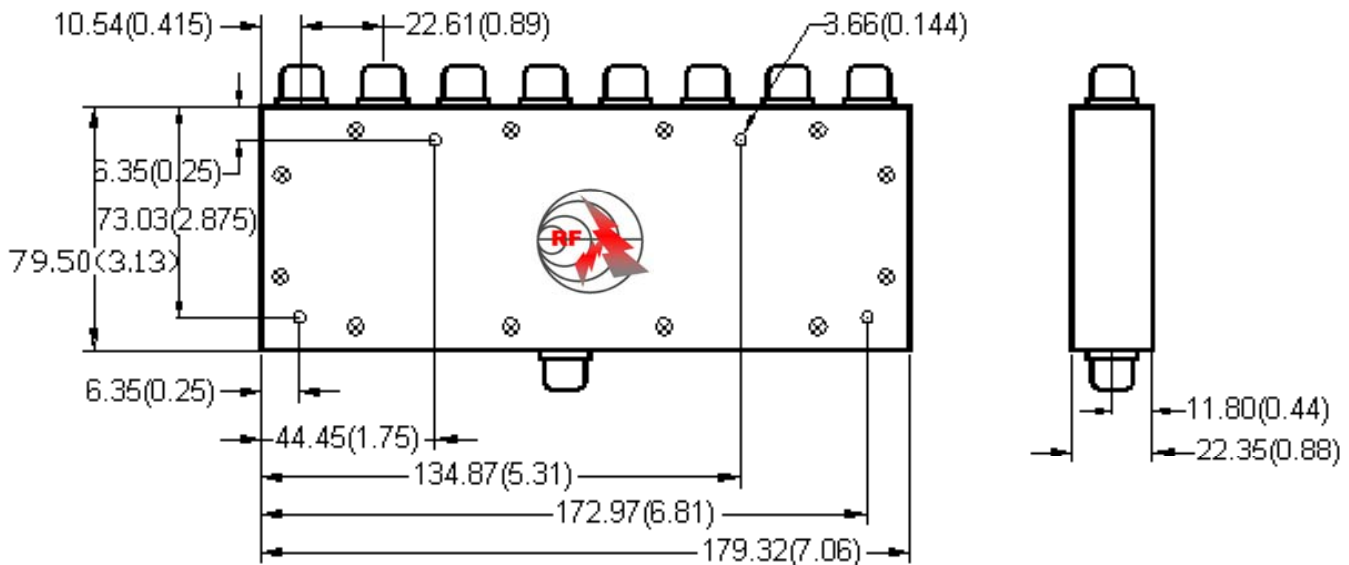

Notes:

1. Case material: Aluminum alloy with Nickel-plating.

2. Connector: N/SMA/BNC/TNC...

3. Temperature -40° C ~ +85° C