



Absorptive Coaxial SP2T Switch 1 - 18GHz



Features

- Ultra Wide Band Operation 1-18GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request

Electrical Specifications, TA = +25 °C, Vdd=+5V/-5V, TTL= 0/ +5V

Description	PN: RFSP2TA0118G									
	SP2T Absorptive Switch									
	Low Power Cold Switching									
Parameters	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range	1-8			8-12			12-18			GHz
Insertion Loss		1.5	1.8		1.8	2.5		2.5	3	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/°C
Isolation	70	75		70	75		60	65		dB
Input VSWR		1.3	1.5		1.4	1.6		1.6	2	:1
Output VSWR		1.3	1.5		1.4	1.6		1.6	2	:1
DC Power Dissipation		0.5			0.5			0.5		W
0.1dB Compression Point (Po.1dB)		30			30			30		dBm
IIP3		55			55			55		dBm
Switching Speed	100									ns
Weight	0.71									ounces
Impedance	50									Ω
Bias Current (+5V / -5V)	80/50									mA
Input / Output Connectors	SMA-Female									
Finishing	Gold Plating									
Material	Aluminum									
Sealing	Hermetically Sealed (Optional)									

Absorptive Coaxial Single Pole Double Throw Switch 1 - 18GHz



Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
TTL Control Voltage	0~0.8V / 2~5V


Note: TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged.

Ordering Information

Part No.	ECCN	Description
RFSP2TA0118G	EAR99	SP2T 1-18GHz PIN Diode Switch

Typical Performance Plots


Insertion Loss @+25°C

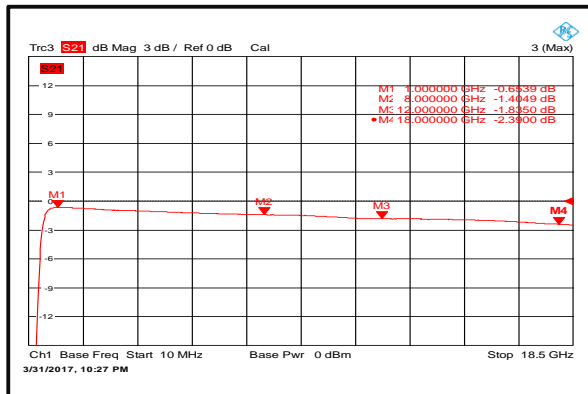


Environmental Specifications

Operational Temperature (°C)	-45 ~ +85
Storage Temperature (°C)	-50 ~ +125
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions


Output VSWR @+25°C

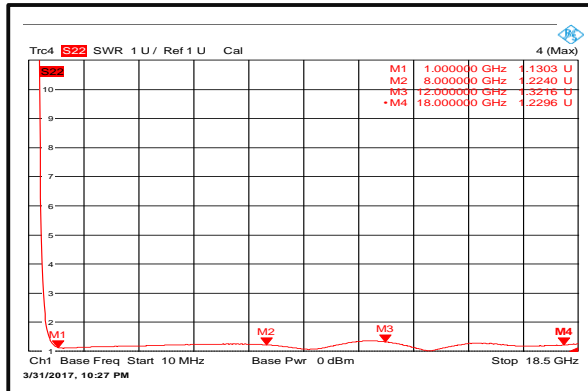

Input VSWR @+25°C

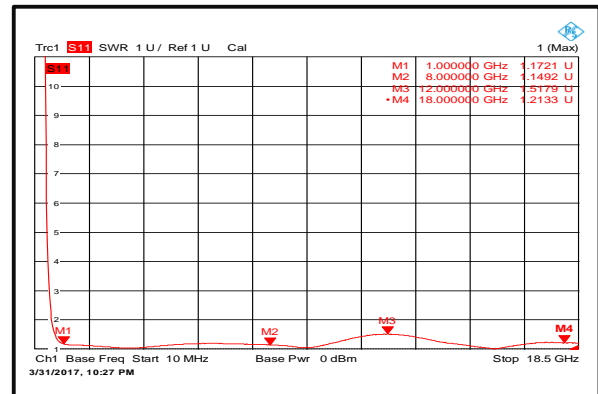


Isolation @+25°C

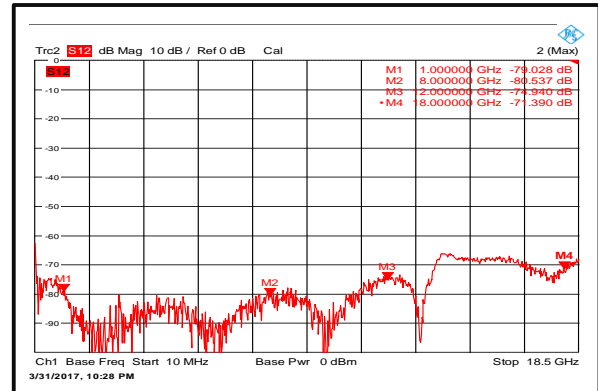


Absorptive Coaxial Single Pole Double Throw Switch 1 - 18GHz




Insertion Loss @-45°C

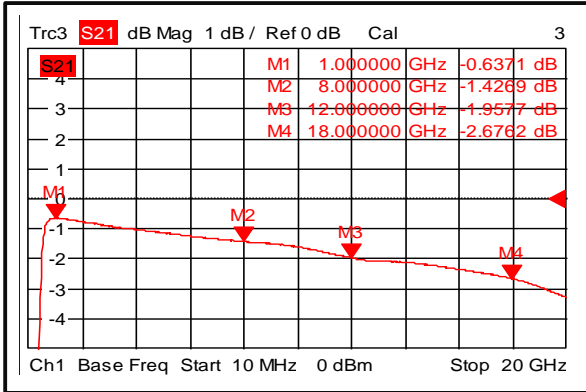


Input VSWR @-45°C

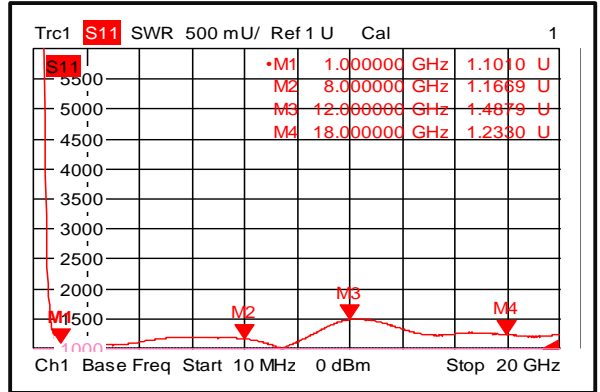


Output VSWR @-45°C

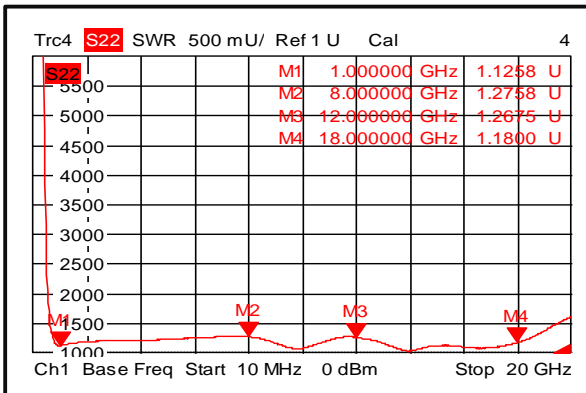


Isolation @-45°C

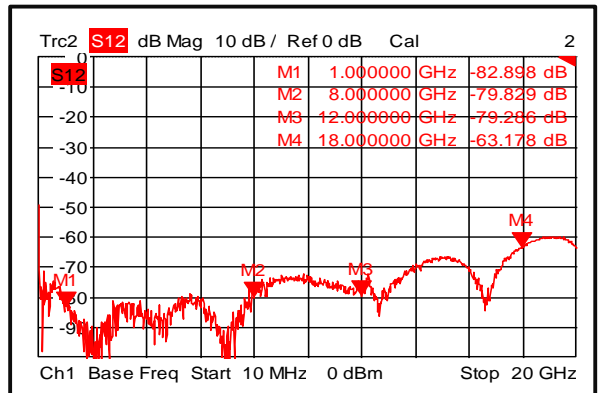


Insertion Loss @+85°C

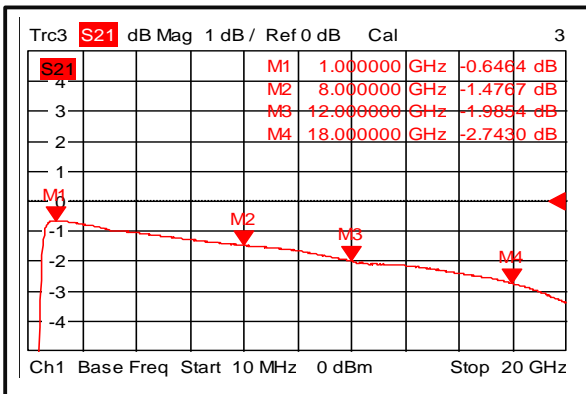


Input VSWR @+85°C

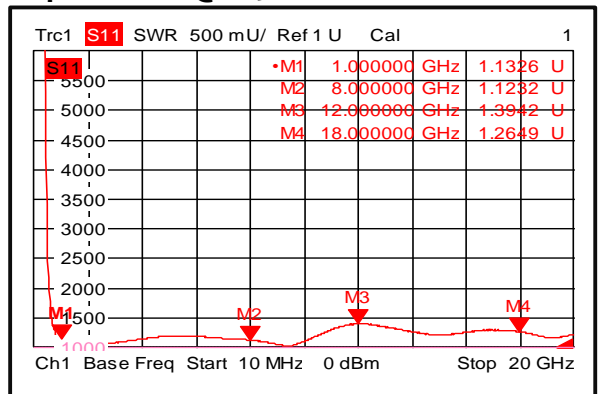

Output VSWR @+85°C

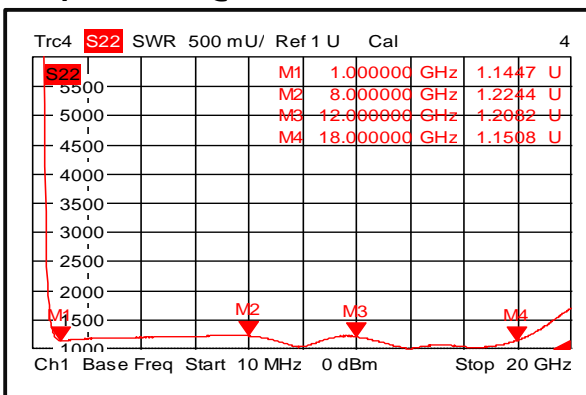


Isolation @+85°C

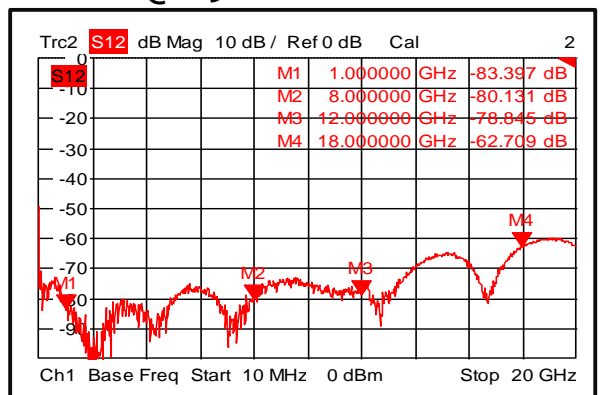




Switching Speed

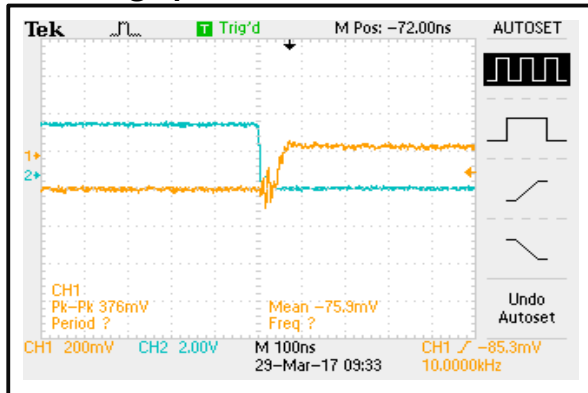


Switching Speed

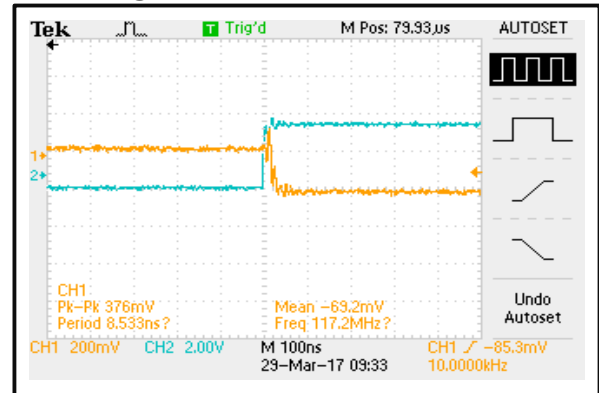

Outline Drawing:

All Dimensions in mm [inches]

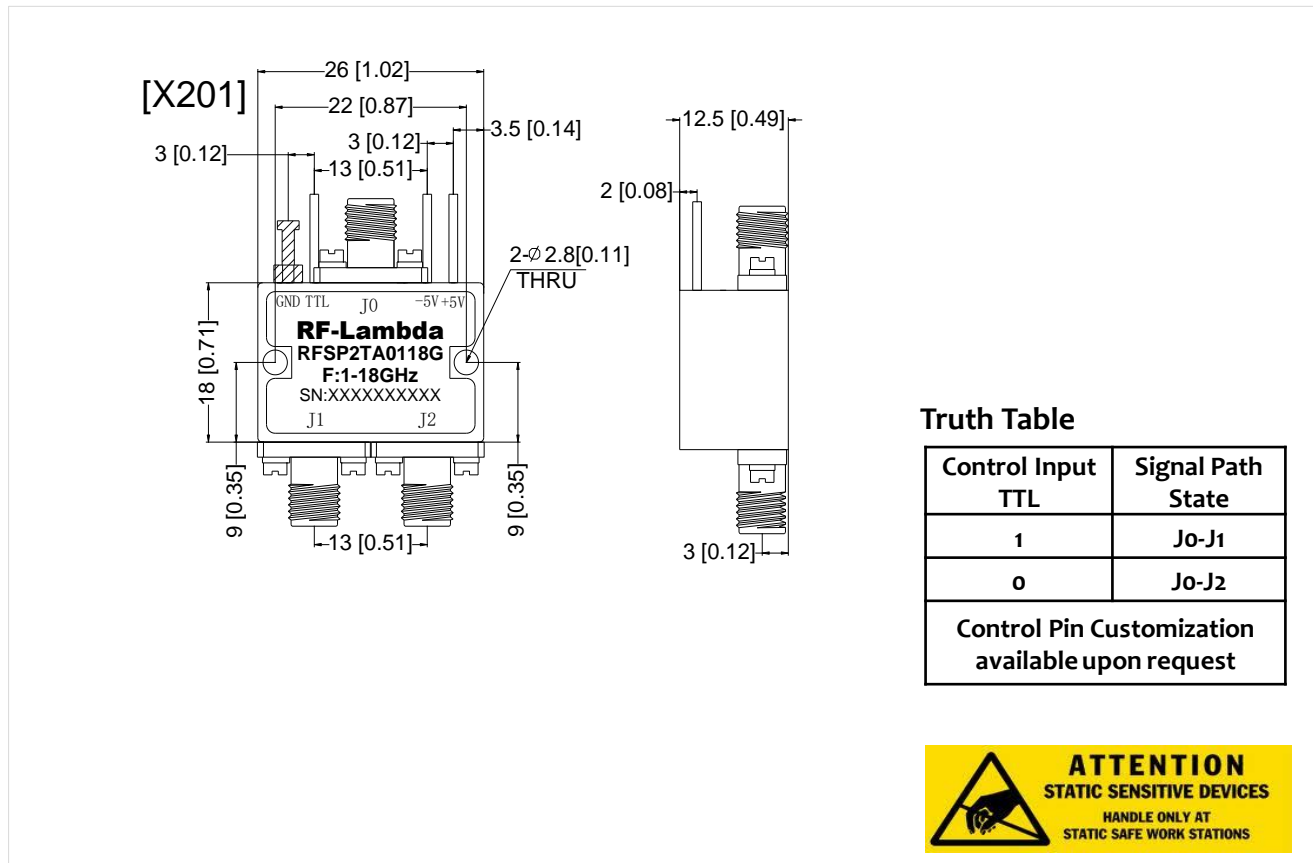

Absorptive Coaxial Single Pole Double Throw Switch 1 - 18GHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.