


WR229 FLANGE STANDARD:CPR229

| | | |
|------------|----------------------------------|-----------------------|
| 1.0 | ELECTRICAL SPECIFICATIONS | |
| 1.1 | Frequency Range | 3.22-4.9GHz |
| 1.2 | Waveguid Type | RectaugularWR229/WG11 |
| 1.3 | Flang | CPR229 |

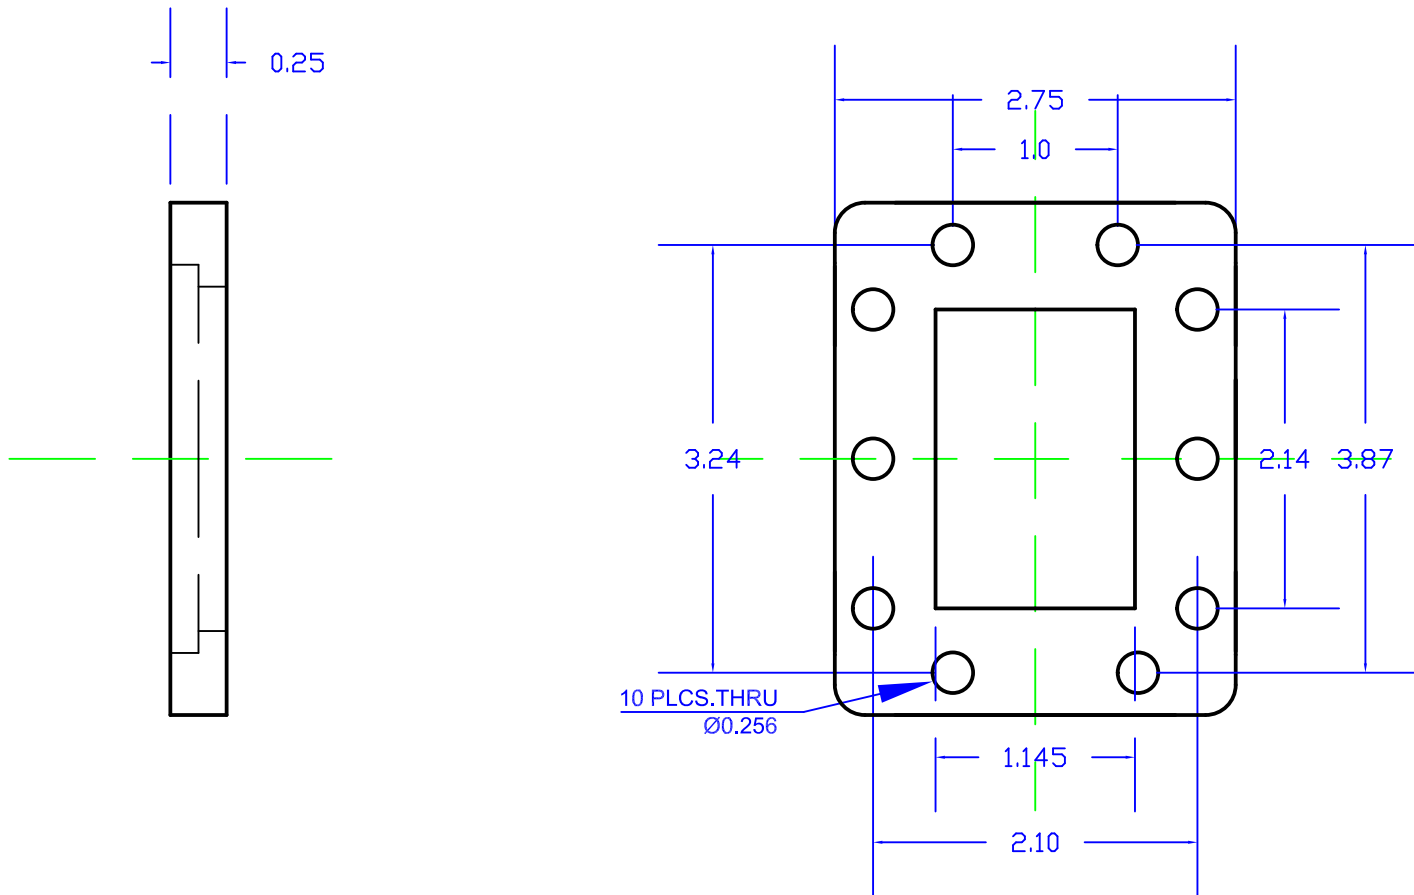

| | | |
|---|--|--------------------|
| PAGE OF | | DATE |
| PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRUTUBG BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY | | DESIGN |
| RF-LAMBDA | | RFPC |
| WR229 FLANGE COVER | | RFPC |
| www.rflambda.com | | CAD MODEL REVISION |
| RF-LAMBDA | | 19 |
| SIZE LT | | ASSEMBLY REVISION |
| SHEETS 1 | | VS52 |
| OF 1 | | ASSEMBLY NAME |
| | | RFLVR17 |
| | | DRAWING NUMBER |
| | | D05-1 |