
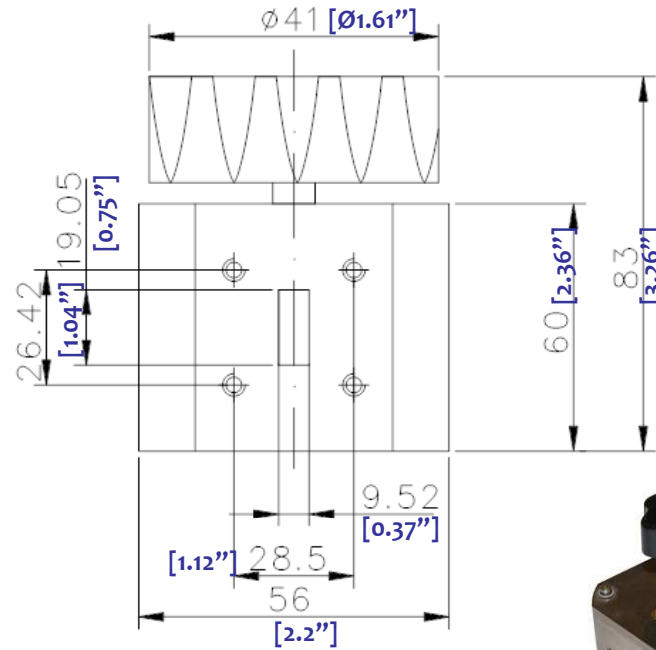
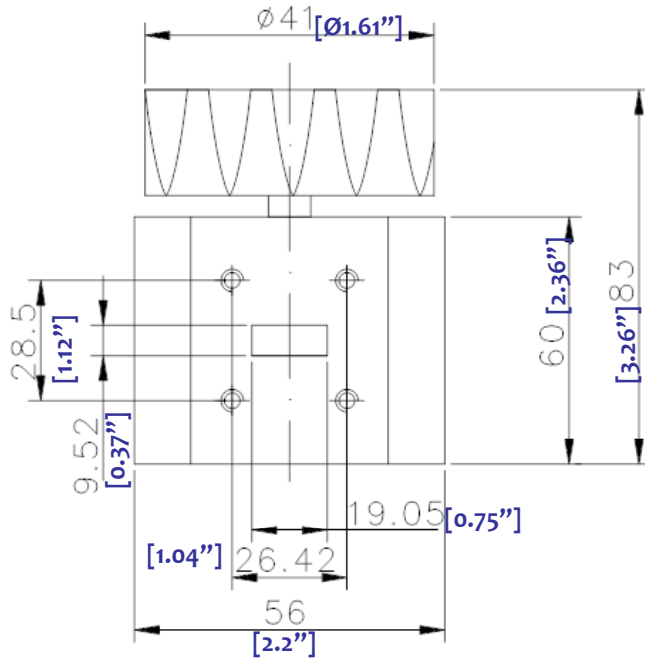


WAVEGUIDE WR75 3-PORT E-PLAN SWITCH


– **RFWSW 75 M 3 E**

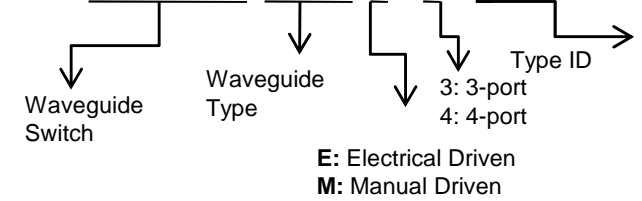

3.0	Electrical Specifications	
3.1	Frequency Range	9.84-15GHz
3.2	Forward Power	600W (CW)
3.3	Insertion Loss	0.3dB
3.4	Isolation	40dB
3.5	VSWR (master)	1.20 : 1

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR75
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Brass
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

PAGE	OF	DATE	Jun 21 st 2004
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN	
 RFWSW75M3E WAVEGUIDE 3-PORT SWITCH		RFPC	
www.rflambda.com		RF-LAMBDA	
RF-LAMBDA		RFPC	
SIZE LT SHEETS 1 OF 1		CAD MODEL REVISION 0-4 ASSEMBLY REVISION VS2DS ASSEMBLY NAME RFLVR011 DRAWING NUMBER D02-1	