
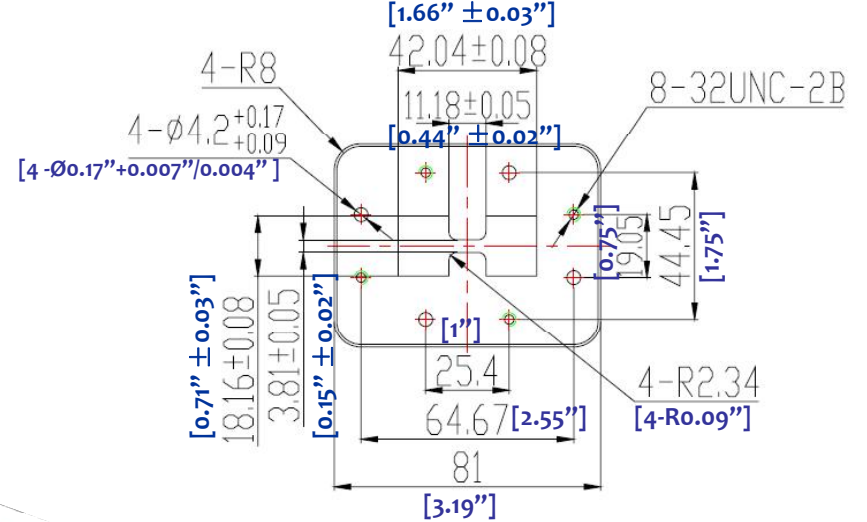


WRD250 WAVEGUIDE 1500W HIGH POWER TERMINATION – RFWDT250B

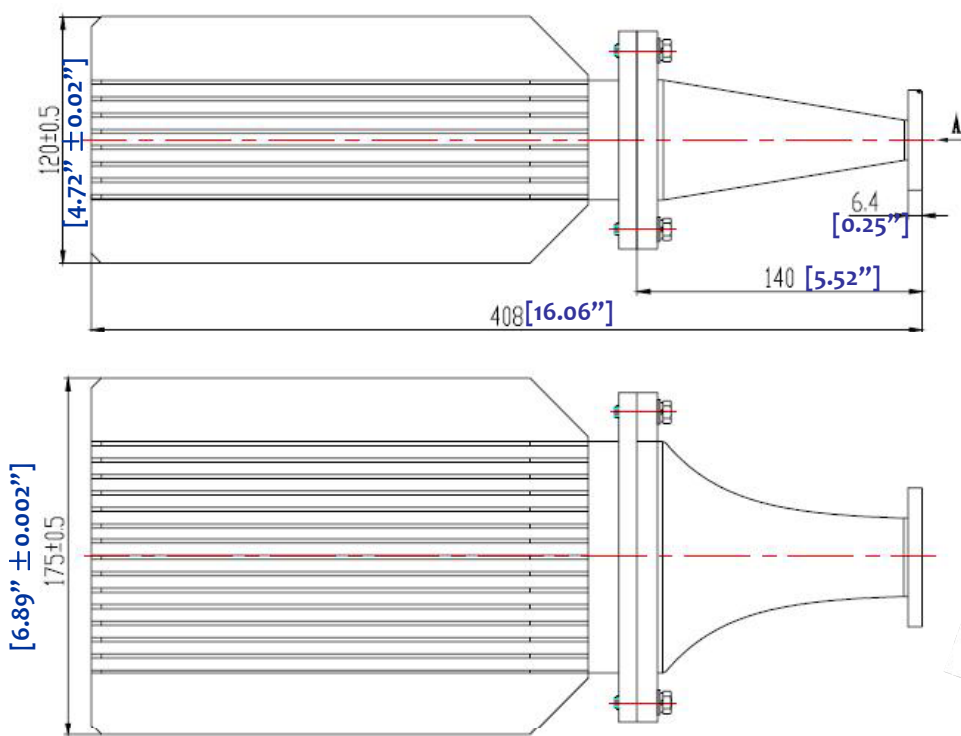

3.0 Electrical Specifications		
3.1	Frequency Range	2.5-7.5GHz
3.2	Average Power	1500W (CW)
3.3	Peak Power	10KW
3.4	VSWR	1.25:1 (max)

1.0 Mechanical Specifications		
1.1	Waveguide type	Rectangular Waveguide WRD250
1.2	Flange type	CPRF, COVER
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+70°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE 1 OF 1

DATE Jun 21st 2006

DESIGN RFPC

RF-LAMBDA RFPC

CAD MODEL REVISION 11

ASSEMBLY REVISION VS5DS

ASSEMBLY NAME RFLVR05

DRAWING NUMBER D05-1

www.rflambda.com

RF-LAMBDA

SIZE LT

SHEETS 1 OF 1

PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY

RFWDT250B WAVEGUIDE TERMINATION