

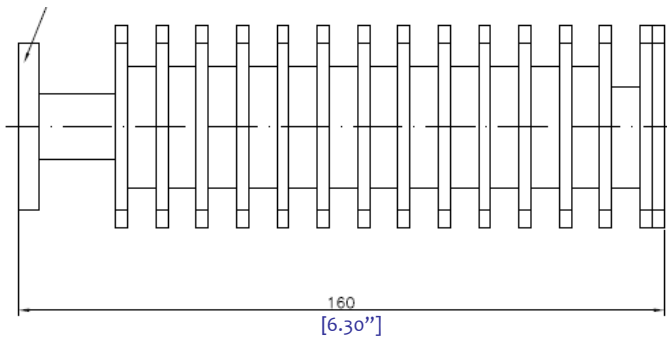



1.0 Mechanical Specifications		
1.1	Waveguide type	Rectangular Waveguide WR90
1.2	Flange type	CPRF, COVER
1.3	Flange Holes	Through
1.4	Basis-material	Alloyed Cuprum
1.5	Internal Body Finish	Silver Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

3.0 Electrical Specifications		
3.1	Frequency Range	8.2~12.4GHz
3.2	Average Power	100W (CW)
3.3	VSWR	1.2:1 (max)

WR90 WAVEGUIDE 100W HIGH POWER TERMINATION- RFWT90C

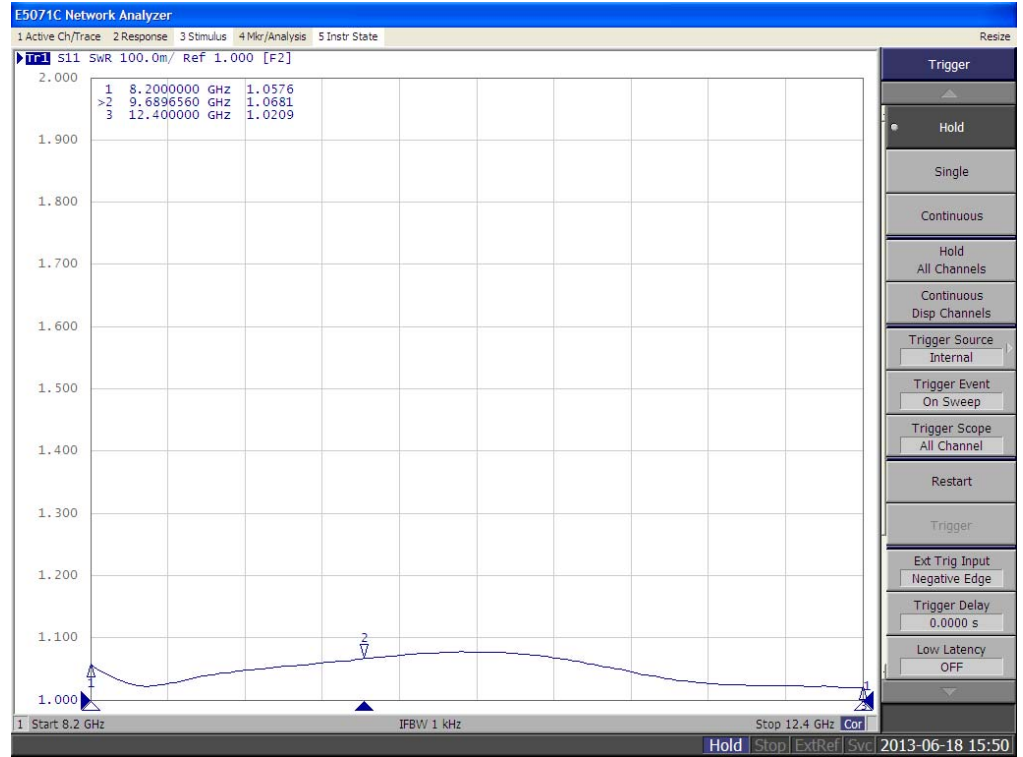

PAGE 1 OF 1		DATE Jun 21 st 2006
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITINGS BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY		DESIGN RFLPC
 RFWT90C WAVEGUIDE TERMINATION		RF-LAMBDA RFLPC
www.rflambda.com		CAD MODEL REVISION 11
SIZE LT		ASSEMBLY REVISION VS5DS
SHEETS 1 OF 1		ASSEMBLY NAME RFLVR05
		DRAWING NUMBER D05-1