

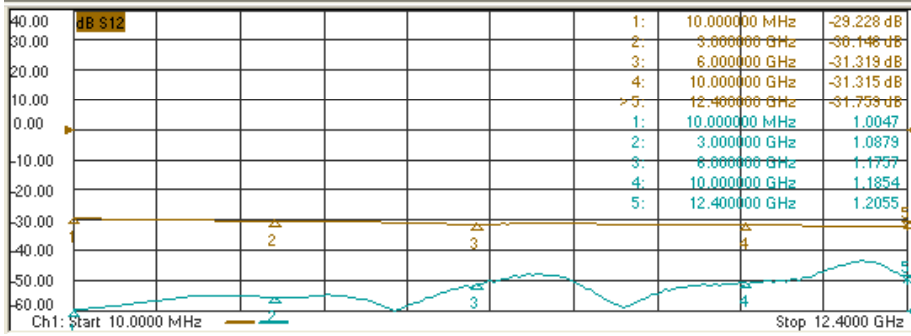


250W HIGH POWER COAXIAL FIXED ATTENUATOR DC-12.4GHz

--- RFS250G12B

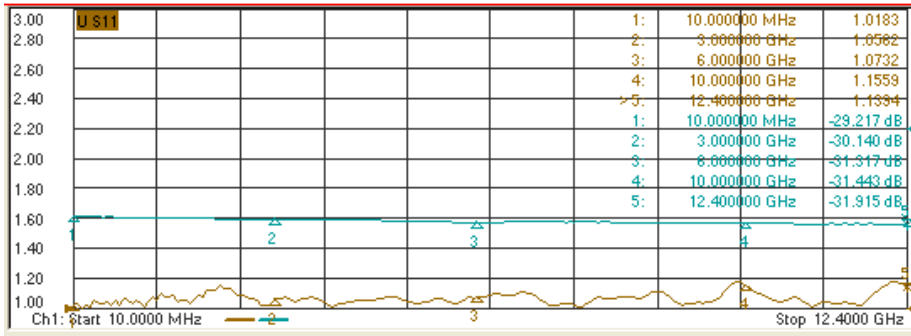

1.0 Mechanical Specifications		
1.1	Coaxial Connector	N
1.2	Size	Φ63 × 360mm Φ2.48" × 14.17"
1.3	Weight	1.05kg
1.4	External Body Finish	Body painted with gray/black epoxy enamel

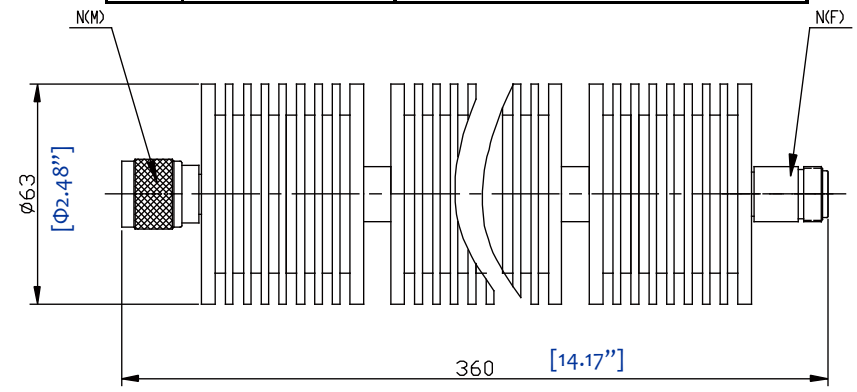

2.0 Environment specifications		
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-55°C~+125°C
2.3	Altitude	42000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc
2.7	Cooling	FAN required for long time operation

3.0 Electrical Specifications						
PN	Frequency (GHz)	Attenuation Accuracy (dB)				VSWR (max.)
		10	20	30	40	
RFS250G12	DC-12.4	/	/	-15/+2.8	-15/+2.8	1.50

PAGE 1 OF 1 DATE JUN 12th 2009

PROPRIETARY INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY

**RFS250G12B
HIGH POWER
ATTENUATOR**

www.rflambda.com

RF-LAMBDA SIZE LT SHEETS 1 OF 1

DESIGN: RFPC
RF-LAMBDA: RFPC
CAD MODEL REVISION: 10
ASSEMBLY REVISION: VS52
ASSEMBLY NAME: RFLVR07
DRAWING NUMBER: D05-A