



Multiple Frequency Combiner 1435~5300MHz



Features

- High Isolation
- Low Insertion Loss
- Excellent Temperature Stability
- Miniaturization
- Customization available upon request

Electrical Specifications, $T_A=25^\circ C$

Parameters	CH1			CH2			CH3			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range	1435-1525			2200-2400			4400-5300			MHz
Insertion Loss		0.3	0.6		0.3	0.6		0.3	0.6	dB
Pass Band Ripple		0.15	0.3		0.15	0.3		0.15	0.3	dB
Return loss	18	19.5		18	19.5		18	19		dB
Port Isolation	60	70		60	70		60	70		dB
Max Input Power (Per Port)	50									Watts
Impedance	50									Ohms
Weight	17.64									Ounces
Input / Output Connectors	SM-Female									
Material	Aluminum									
Finishing	Blue Paint									

Environmental Specifications


Operational Temperature (°C)	-40 to +60
Storage Temperature (°C)	-55 to +85
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi. min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Multiple Frequency Combiner 1435~5300MHz




Typical Performance Plots


VSWR. Loss. Ripple. Isolation @+25°C

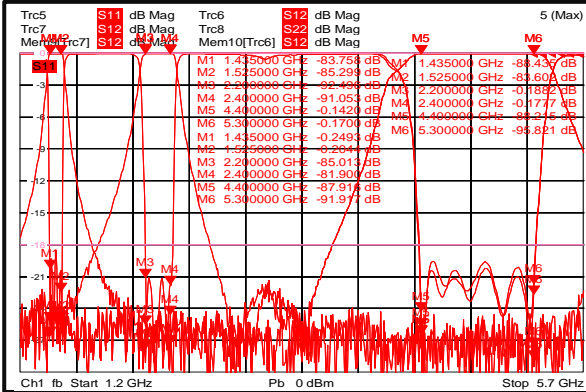

VSWR. Loss. Ripple. Isolation @-45°C

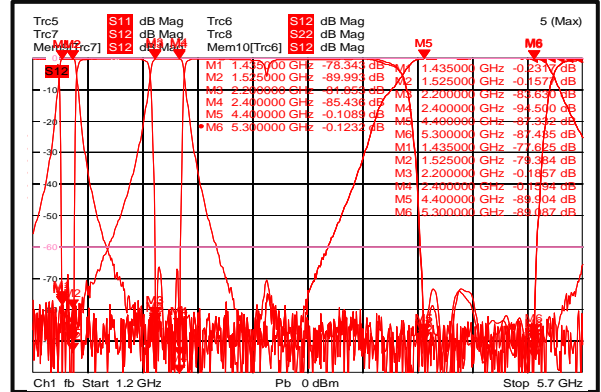

VSWR. Loss. Ripple. Isolation @+85°C

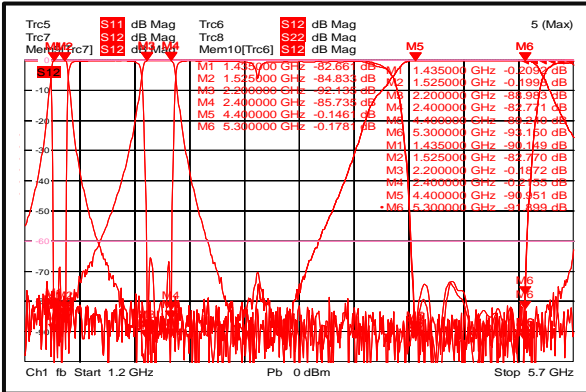

Multiple Frequency Combiner 1435~5300MHz



RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

RFTU14M22M44

Outline Drawing:

All Dimensions in mm [inches]

Tolerance ± 0.3 [0.012]

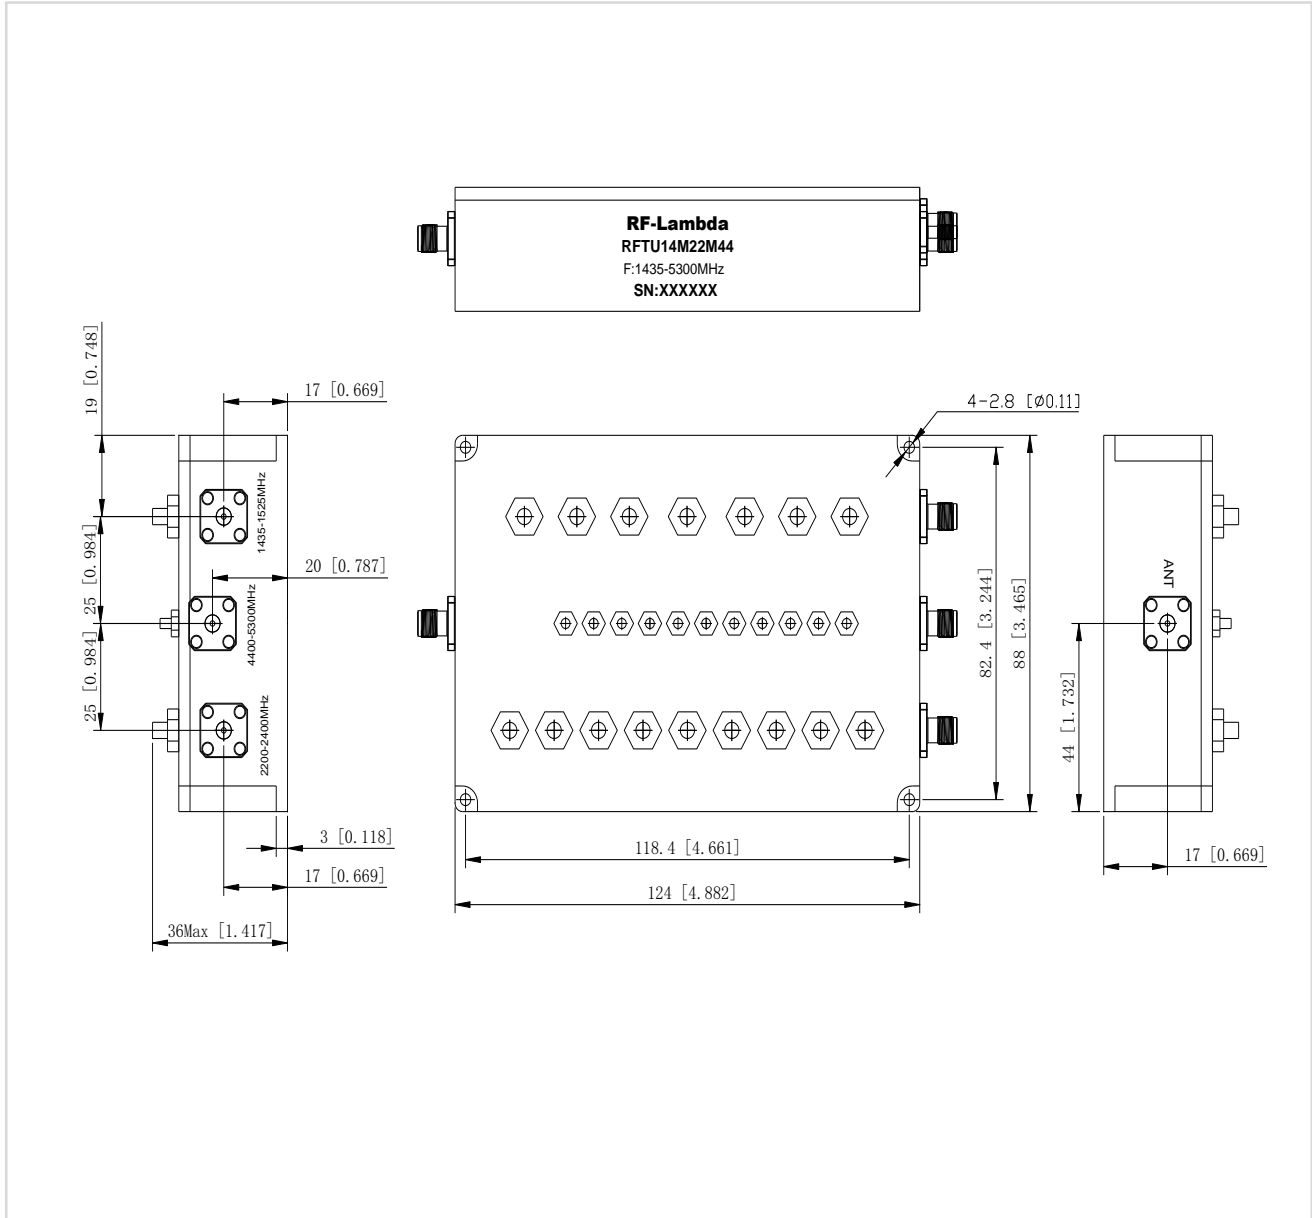

Multiple Frequency Combiner 1435~5300MHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.