



2G Commercial Band Duplexer




- Compact size and high power handle
- Very high rejection outdoor unit
- Compatible with ITU Standard
- Power Handle: 100W average CDMA signal
- N-Female and SMA-F connector available upon request
- Storage temperature -50°C~+125 °C
- Operational Temperature: -40 °C ~+85 °C
- Operating Humidity: 0~90% relative



Specification

Channel Frequency: 1920~1980MHz
 2110~2170MHz
 Insertion Loss: 0.8dB typ. 1.0dB max
 Pass band Ripple: 0.5dB p-p maximum
 Return Loss: 18dB minimum

Outband Rejection:
 >45dB @ 1900MHz, 2000MHz
 >45dB @ 2190MHz, 2090MHz
 >90dB @ Channel Isolation

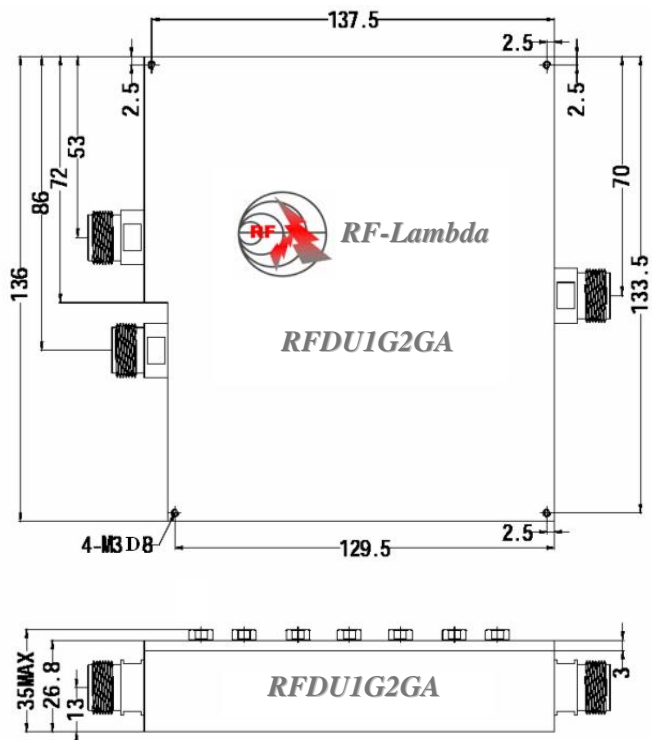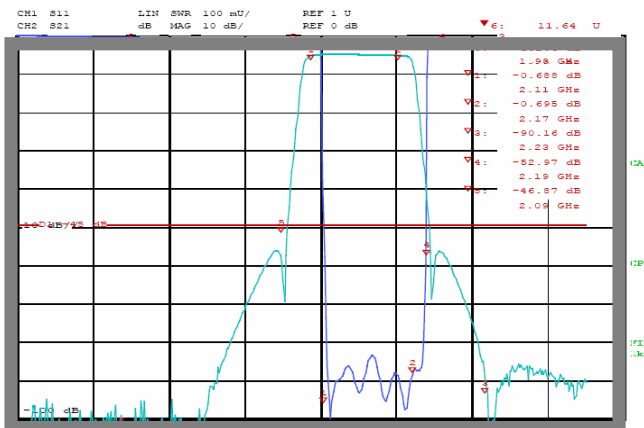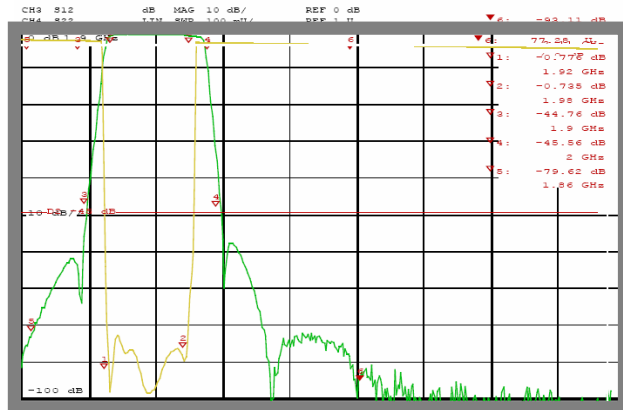

2G COMMERCIAL BAND DUPLEXER