



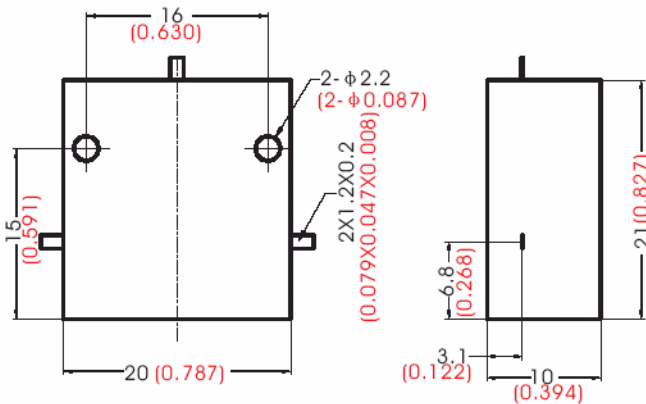

S Band Drop-in Circulator

RFLC-302					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLC-302-1	1.7~2.7	50	0.3	23	1.15
RFLC-302-2		100	0.4	21	1.20
RFLC-302-3		200	0.5	19	1.25

Case Type: Drop-in
 Operating Temperature: -55~+85°C
 Forward Power: 10W (CW)
 Higher power unit available upon request.

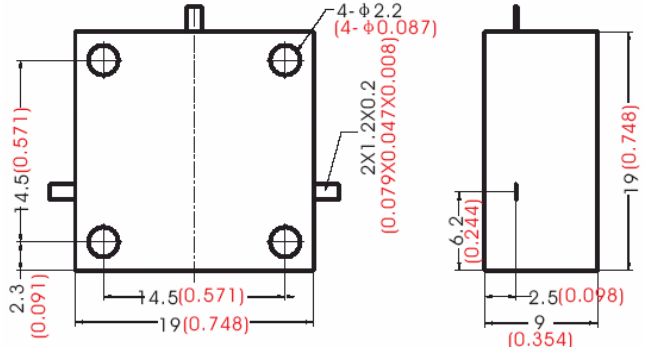

RFLC-304					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLC-304-1	1.7~2.4	50	0.3	23	1.15
RFLC-304-2		100	0.4	20	1.20
RFLC-304-3		200	0.5	18	1.25

Case Type: Drop-in
 Operating Temperature: -40~+70°C
 Forward Power: 10W (CW)
 Higher power unit available upon request.

RFLC-306					
Part Number	Frequency (GHz)	Bandwidth (MHz)	Insert. Loss (dB)	Isolation (dB)	VSWR
RFLC-306-1	2~4	200	0.3	23	1.15
RFLC-306-2		400	0.4	21	1.20
RFLC-306-3	1.8~4.2	400	0.5	18	1.25

Case Type: Drop-in
 Operating Temperature: -40~+70°C
 Forward Power: 10W (CW)
 Higher power unit available upon request.

